


RV 5.5-6

圆形端头
带绝缘套

螺栓直径6mm
导线使用范围
(4~6mm²)

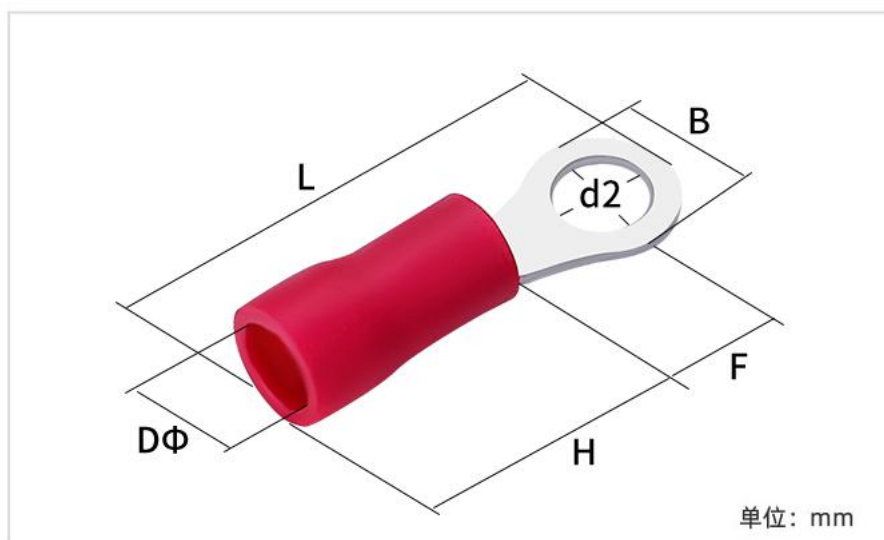

型号	美制 螺栓号	螺栓口 直径 d2	尺寸 (mm)					数量 /包	说明
			B	L	F	H	D ϕ		
RV1.25-3	#4	3.2	5.6	17.8	4.98	10	4.3	1000	导线截面： 0.5~1.5mm ² 美国线规22-16 电流I _{max} =19A 材质：铜
RV1.25-3.2	#4	3.4	5.6	17.8	4.98				
RV1.25-3.5	#6	3.7	5.6	17.8	4.95				
RV1.25-3.5M	#6	3.7	6.6	20.1	6.3				
RV1.25-3.5L	#6	4.3	8.0	21.5	7.0				
RV1.25-3.7	#6	3.9	5.7	17.8	4.95				
RV1.25-3.7M	#6	3.9	6.6	20.1	6.3				
RV1.25-3.7L	#6	3.9	8.0	21.5	7.0				
RV1.25-4	#8	4.1	6.5	18.1	4.6				
RV1.25-4L	#8	4.3	8.0	21.5	7.0				
RV1.25-5	#10	5.1	7.8	20.5	7.3				
RV1.25-5L	#10	5.3	9.8	23.0	8.5				
RV1.25-6	1/4	6.4	11.6	26.5	11				
RV1.25-8	5/16	8.3	11.6	26.5	11				
RV1.25-10	3/8	10.4	13.6	31.6	13.9				
RV1.25-12	1/2	13	19.2	36.0	16.5				
RV2-3	#4	3.0	5.6	17.8	4.3	10	4.8	1000	导线截面： 1.25~2.5mm ² 美国线规16-14 电流I _{max} =27A 材质：铜
RV2-3.2	#4	3.2	5.6	17.8	4.3				
RV2-3.5	#6	3.7	5.7	17.8	4.3				
RV2-3.5M	#6	3.7	6.6	21.0	7.0				
RV2-3.5L	#6	4.3	8.5	22.5	7.7				
RV2-3.7	#6	4.3	5.6	17.8	4.95				
RV2-3.7M	#6	4.3	6.6	21.0	6.5				
RV2-3.7L	#6	4.3	8.5	22	7.7				
RV2-4	#8	4.1	6.5	18.5	5				
RV2-4L	#8	4.3	8.5	22.5	7.7				
RV2-5	#10	5.3	8.5	21.5	7.2				
RV2-5L	#10	5.3	9.5	21.5	7.2				
RV2-6	1/4	6.3	11.5	25.5	9				
RV2-8	5/16	8.4	12.0	27.6	11.0				
RV2-10	3/8	10.5	13.6	30.2	13.9				
RV2-12	1/2	13.0	19.2	36.5	16.5				
RV3.5-4	#8	4.0	7.0	23.5	7.7	13.0	5.8	500	导线截面： 2.5~4mm ² 美国线规14-12 电流I _{max} =37A 材质：铜
RV3.5-5	#10	5.3	8.0	24.5	7.7				
RV3.5-5L	#10	5.3	12.0	27.9	7.7				
RV3.5-6	1/4	6.3	11.5	27.5	8.5				
RV3.5-8	5/16	8.4	14.5	33	13				
RV3.5-10	3/8	10.5	15	33.7	13.7	13.5	6.3	500	导线截面： 4~6mm ² 美国线规12-10 电流I _{max} =48A 材质：铜
RV5.5-3.5	#6	3.7	7.2	21.4	5.9				
RV5.5-3.7	#6	3.7	7.2	21.5	5.9				
RV5.5-4	#8	4.3	7.2	21.4	5.9				
RV5.5-4L	#10	4.3	9.5	25.5	8.3				
RV5.5-5	#10	5.3	9.5	25.5	8.3				
RV5.5-6	1/4	6.4	11.3	27.3	8.3				
RV5.5-8	5/16	8.4	14.5	33	13				
RV5.5-10	3/8	10.5	15.0	33.7	13.7				
RV5.5-12	1/2	13.0	19.2	38.1	16.0				