








A



SECTION A-A



3D VIEW

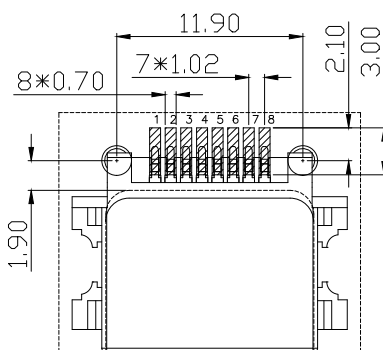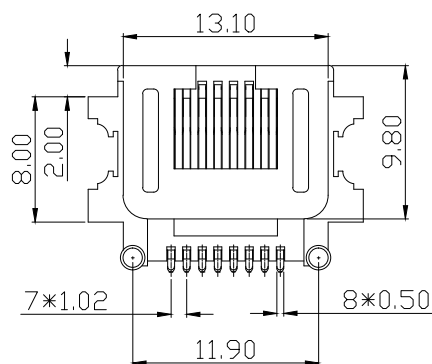

 PAD AREA (TOP VIEW)

NOTES:

1. MATERIAL:

1.1. HOUSING: LCP ,COLOR IS GRAY;

1.2. CONTACT: PHOSPHOR COPPER (C5191 T=0.30mm);

2. FINISH: GOLD PLATED G/Fu";

4. ELECTRICAL:

4.1. VOLTAGE RATING: 125 VAC RMS;

4.2. CURRENT RATING: 1.5 AMP;

4.3. CONTACT RESISTANCE: 35MILLIOHMS MAX.;

4.4. WITHSTAND VOLTAGE: 500 VAC RMS 50(60)Hz,1MIN.;

4.5. INSULATION RESISTANCE: 500MEGOHMS MIN @500V DC

5. MECHANICAL:

5.1. MATING/UNMATING FORCE: 22N MAX.;

5.2. RETENTION STRENGTH: 50N MIN.;

5.3. OPERATING LIFE: 750 CYCLES MIN.;

6. ENVIRONMENTAL:

6.1. STORAGE TEMPERATURE RANGE: -40°C~+85°C;

6.2. OPERATION TEMPERATURE RANGE: -25°C~+70°C;

_____		new		2015/5/3		A			
ECN BO.		DESCRIPTION.		DATE.		REV.			
DESIGNED	CHECKED	APPROVAL	DRAWING NUMBER			SCALT: 1/2		SCALE: 3:1	
Mikey	Tom	Jerry	PART NAME	11188WW01003	UNLESS OTHERWISE SPECIFIED,TOLERANCE:		X. ±0.25		
			MODEL NAME	11188WW01003			X.x ±0.20		
			3RD ANGLE PROJ	HANYONES TECH CO.,LTD		X.xx ±0.15			
							ANGULAR	±3'	
							FILE. NO.		