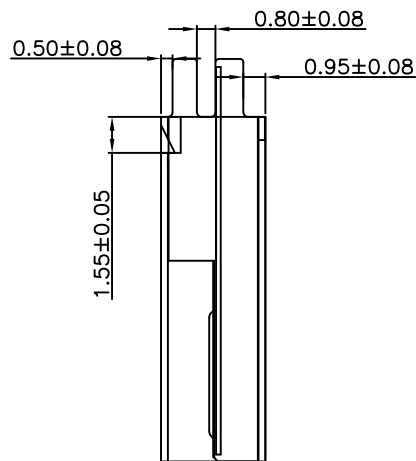
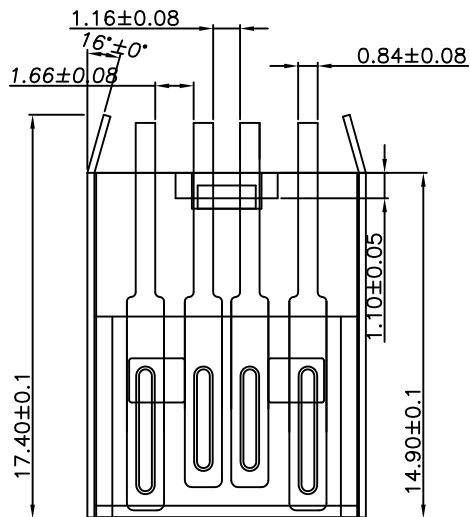


電気特性:Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
100V AC AT Sea Level
5. 阻抗: Insulation Resistance:
30MEGA ohms MIN

物理性能: Mechanical:

1. 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf (MAX)
Unmate force: 1.02kgf (MIN)
2. 端子保持力: Terminal Retention
1.0kgf (MIN)

原材料: Material:

1. 塑膠: Housing:
Hing Temperature Thermoplastics,
PPT 白色
2. 端子: Contact: Copper Alloy C2680
3. 外壳: Shell: Copper Alloy SPCC

电镀: Finish:

1. 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Tails

端子四周镀50U" (MIN) 锡, 镀金区域"镀金0.5U" 盐雾: 24H

2. 外壳: 铁壳四周镀80U"~100U (MIN) 锡 盐雾: 24H
寿命: 5000次
Life: 5000次

_____		new		2015/5/3		A			
ECN BO.		DESCRIPTION.		DATE.		REV.			
DESIGNED	CHECKED	APPROVAL	DRAWING NUMBER				SCALT: 1/2	SCALE: 3:1	
Mikey	Tom	Jerry	PART NAME	U261-041N-10516	UNLESS OTHERWISE SPECIFIED, TOLERANCE:		X.	±0.2	
			MODEL NAME	U261-041N-10516			X.x	±0.2	
			3RD ANGLE PROJ	HANYONES TECH CO.,LTD		X.xx	±0.15	ANGULAR	±3'
				FILE NO.					