



Features

- Provides ESD Protection per IEC 61000-4-2 Standard: Contact $\pm 10\text{kV}$
- 1 Channel of ESD Protection
- High Peak Pulse Current per IEC 61000-4-5 Standard
- Low Channel Input Capacitance
- Typically used in Cellular Handsets, Portable Electronics, Communication Systems, Computers and Peripherals
- **Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)**
- **Halogen and Antimony Free. "Green" Device (Note 3)**


Mechanical Data

- Case: SOD323
- Case Material: Molded Plastic, "Green" Molding Compound; UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Matte Tin Finish Annealed over Alloy 42 Leadframe (Lead-Free Plating). Solderable per MIL-STD-202, Method 208③
- Weight: 0.004 grams (Approximate)

SOD323



Top View



Device Schematic


Ordering Information (Note 4)

Product	Compliance	Marking	Reel Size (inches)	Tape Width (mm)	Quantity per Reel
DESD5V0U1BA-7	Standard	L / 7	7	8	3,000/Tape & Reel

Notes:

Marking Information

SOD323



L / 7 = Product Type Marking Code

Maximum Ratings (@T_A = +25°C, unless otherwise specified.)

Characteristic	Symbol	Value	Unit	Conditions
Peak Pulse Current	I _{PP}	3	A	8/20μs, per Figure 3
ESD Protection – Contact Discharge	V _{ESD_Contact}	±10	kV	IEC 61000-4-2 Standard



Thermal Characteristics

Characteristic	Symbol	Value	Unit
Package Power Dissipation (Note 5)	P _D	250	mW
Thermal Resistance, Junction to Ambient (Note 5)	R _{θJA}	500	°C/W
Operating and Storage Temperature Range	T _J , T _{STG}	-65 to +150	°C

Electrical Characteristics (@T_A = +25°C, unless otherwise specified.)

Characteristic	Symbol	Min	Typ	Max	Unit	Test Conditions
Reverse Standoff Voltage	V _{RWM}	-	-	5	V	-
Channel Leakage Current (Note 6)	I _{RM}	-	5	100	nA	V _{RWM} = 5V
Clamping Voltage	V _{CL}	-	7.2	-	V	I _{PP} = 3A, t _p = 8/20μs
Breakdown Voltage	V _{BR}	5.5	7	9.5	V	I _R = 5mA
Differential Resistance	R _{DIF}	-	-	100	Ω	I _R = 1mA
Dynamic Impedance	R _{dyn}	-	0.3	-	Ω	TLP, 20A, t _p = 100 ns
Channel Input Capacitance	C _T	-	2.9	-	pF	V _R = 0V, f = 1MHz
		-	1.9	-		V _R = 5V, f = 1MHz

Notes:

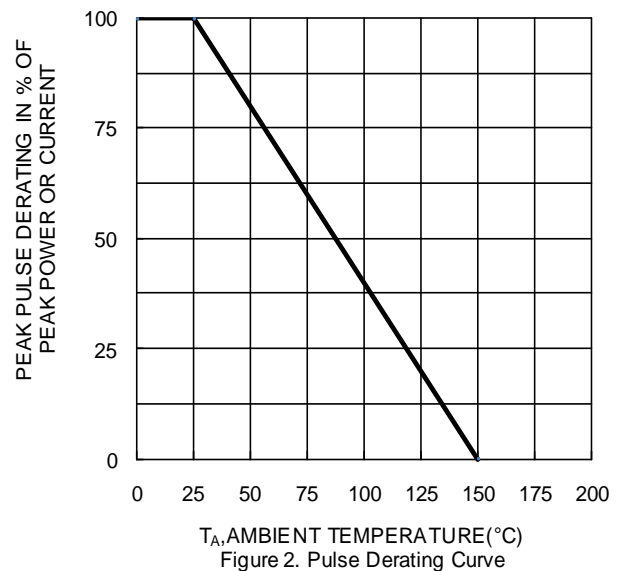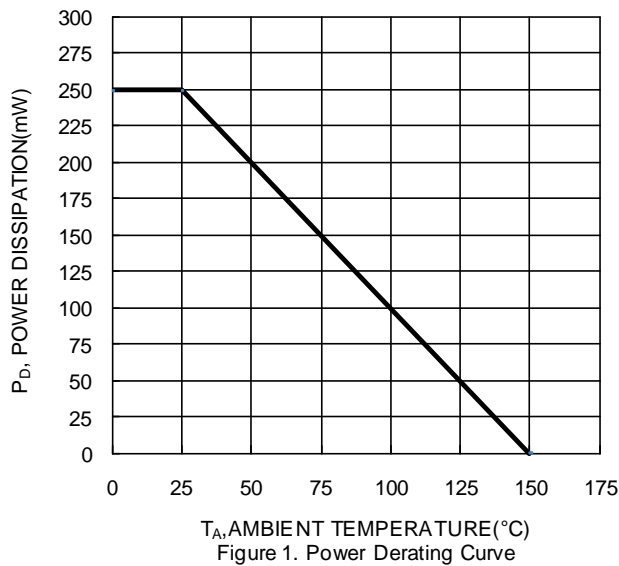

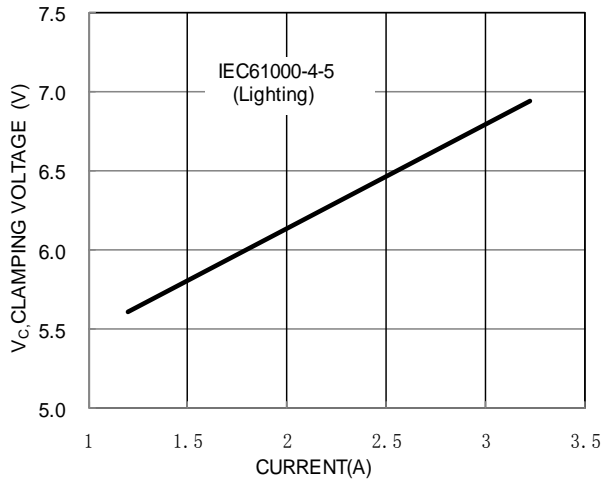


Figure 3. Clamping Voltage Characteristic

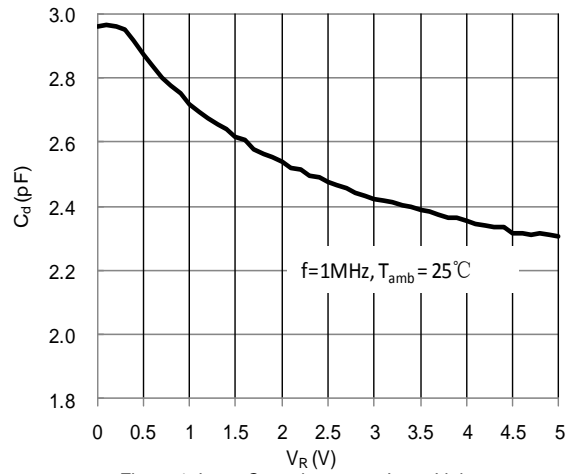


Figure 4. Input Capacitance vs. Input Voltage

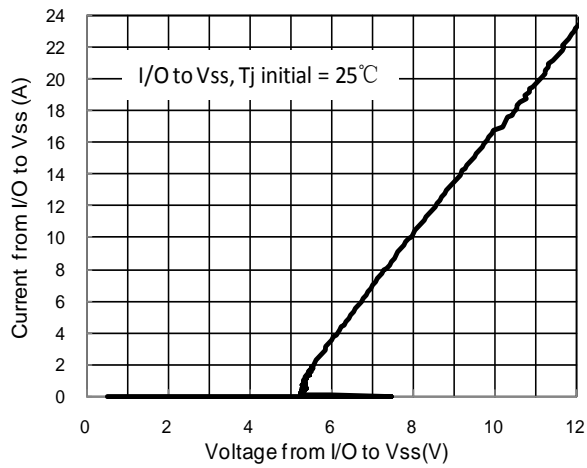


Figure 5. Current vs. Voltage

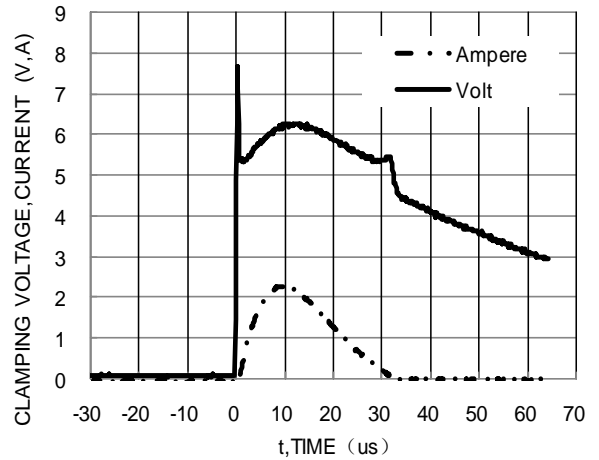


Figure 6. Waveform of Clamping Voltage, Current vs. Time(8/20us, I/O to Vss)

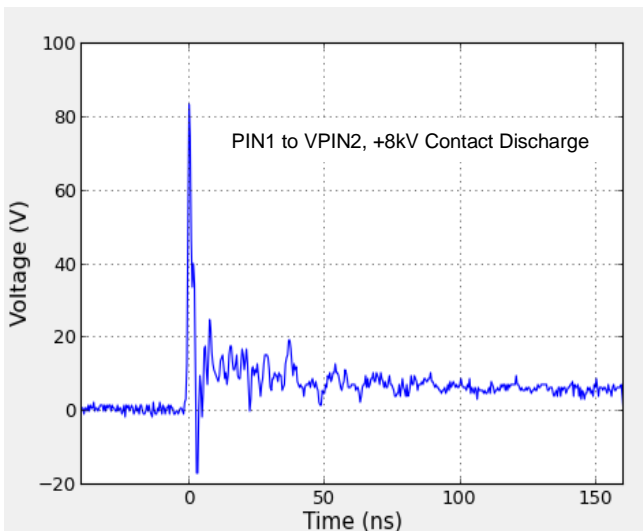


Figure 7 ESD Response to IEC 61000-4-2


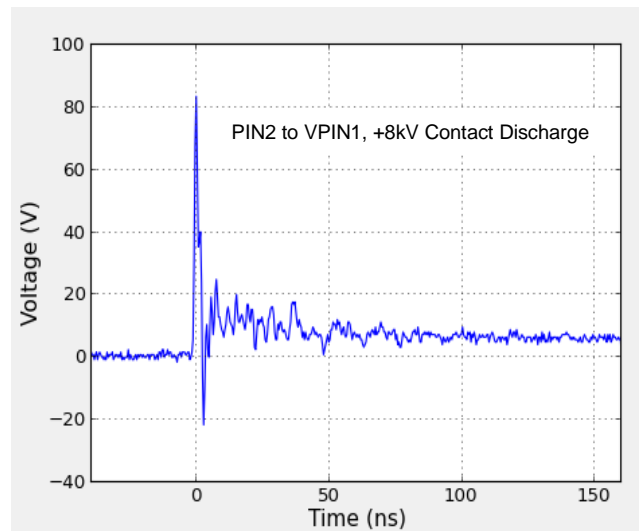



Figure 8 ESD Response to IEC 61000-4-2

Package Outline Dimensions

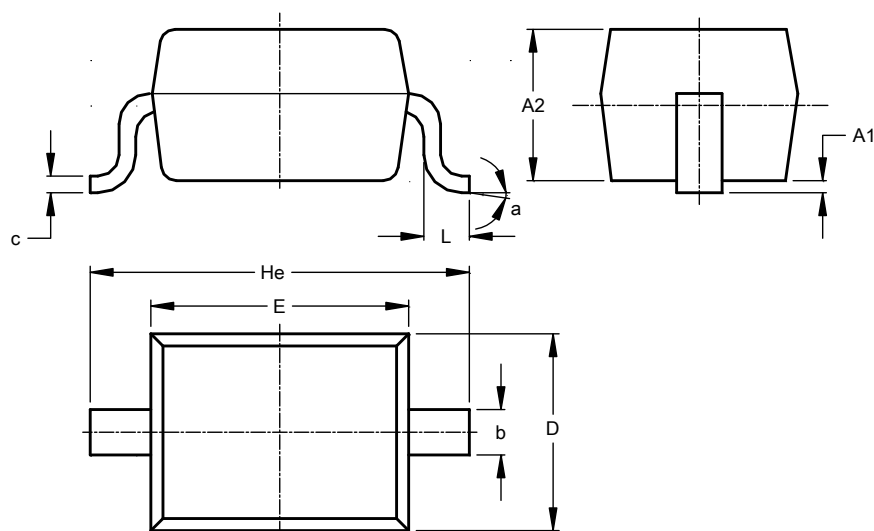

SOD323			
Dim	Min	Max	Typ
A1	-	0.10	0.05
A2	1.00	1.10	1.05
b	0.25	0.35	0.30
c	0.10	0.15	0.11
D	1.20	1.40	1.30
E	1.60	1.80	1.70
He	2.30	2.70	2.50
L	0.20	0.40	0.30
a	8°		
All Dimensions in mm			

Suggested Pad Layout

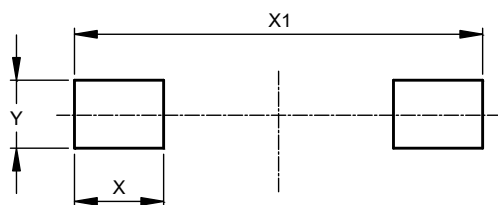

Dimensions	Value (in mm)
X	0.590
X1	2.700
Y	0.450