
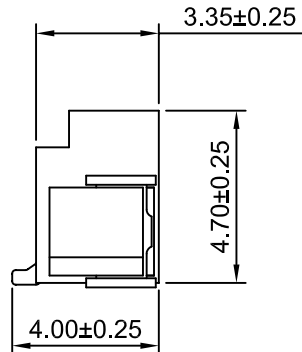


SPECIFICATIONS:

Current Rating: 1A AC,DC
 Voltage Rating: 125V AC,DC
 Temperature Range: -40°C ~ +105°C
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 100MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Pin Material: Phosphor Bronze/Tin over Nickel
 Solder Tabs: Phosphor Bronze/Tin over Nickel
 Material: Nylon 6T, UL94V-0(Ivory)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	1.25	7.25	10P	11.25	17.25
3P	2.50	8.50	11P	12.50	18.50
4P	3.75	9.75	12P	13.75	19.75
5P	5.00	11.00	13P	15.00	21.00
6P	6.25	12.25	14P	16.25	22.25
7P	7.50	13.50	15P	17.50	23.50
8P	8.75	14.75	16P	18.75	24.75
9P	10.00	16.00			

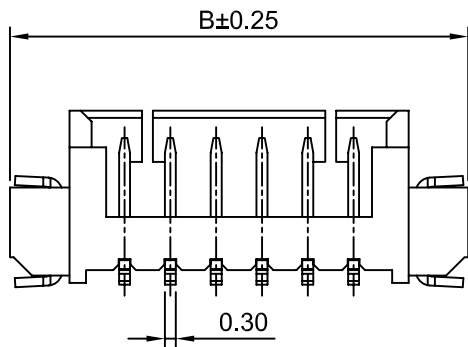

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	5:1	1 of 1
Draw BY:	Approved :	
Tony Su	Jack Yin	

Title :
1.25mm PITCH
180° WAFER - SMT TYPE

			General Tolerance	ANGLE±
A0	NEW RELEASE	2005.05.10	x.x≤0.25	
REV	DESCRIPTION	DATE	x.xx≤0.20	
			x.xxx≤0.15	

DRAW NO : A1251WV-S-XP REV A0