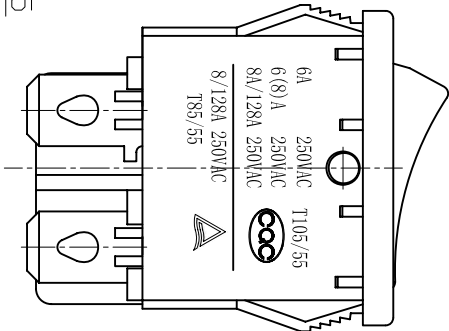
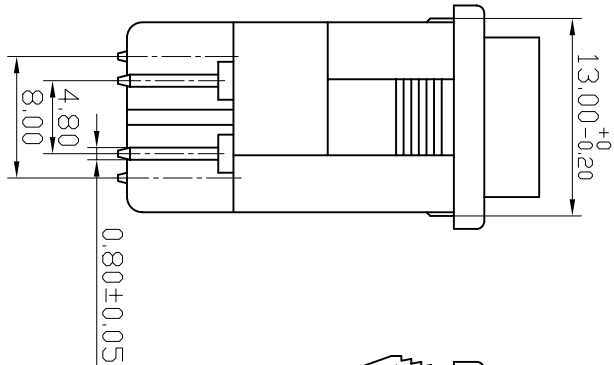
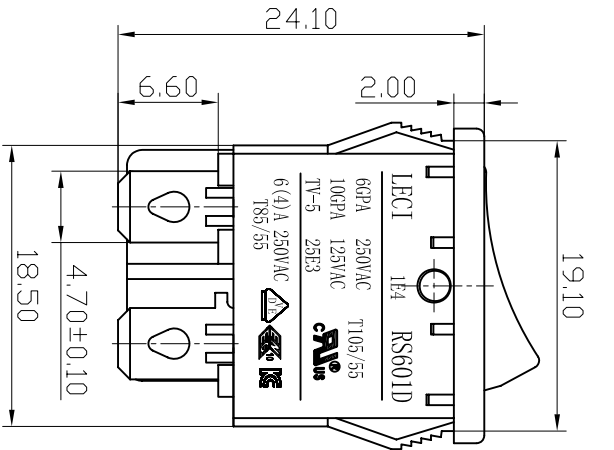


PANEL CUT-OUT		
Z	Y	X
0.70~1.25	12.90~13.10	18.9~19.1
1.25~2.00	12.90~13.10	19.1~19.2
2.00~3.00	12.90~13.10	19.3~19.4

NOTES:

1.Rating:

CQC 6A 250V AC 6(8)A 250V AC

8A/128A 250V AC T105/55

UL cUL 10GPA 125V AC

6GPA 250V AC

T105/55 TV-5

VDE ENEC 6(4)A 250V AC T85/55

KC 6(4)A 250V AC T85/55

TUV 8/128A 250VAC T85/55

2.Circuit Diagram:4P ON-OFF

3.Terminal Strength:≥80N

4.Electrical life:≥10000 cycles

5.Withstand Voltage:Withstand Voltage:1500VAC 1min



Terminals to Button:3000VAC 1min

Leakage Current:1mA

6.Current resistance:≤50mΩ(initial)

7. Insulation resistance:≥100MΩ

8. Body Material:NYLON 66 94V-0-2

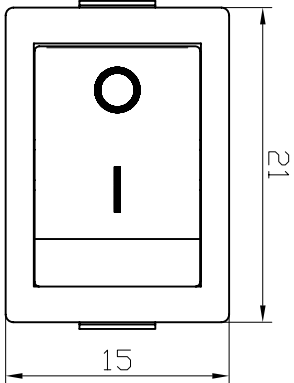

A4			普通公差:									
A3			COMMON TOLERANCE:									
A2			UP TO 5	±0.20	单位	mm	投影	Φ	品名	跷板开关	比例	
A1			ABOVE 5 TO 30	±0.30	绘图	周金勇	核寸	梁金勇	型号	RS601D	Free	
REV.	DATE	REVISION DESCRIPTION	ISSUE	ANGULAR	±5°	日期	2015.8.24	核准	周培雷	图号	RS601D1-2010011BB	
								批准		DWG NO.		