

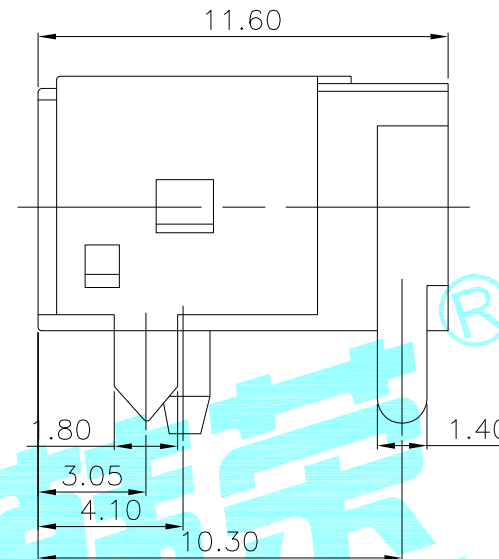


# ROHS

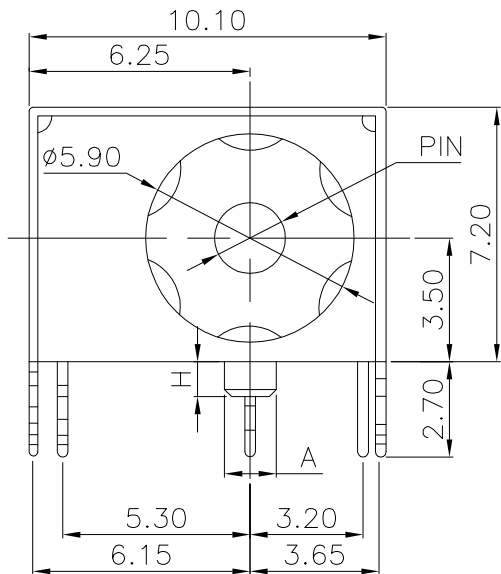

P.C.B LAYOUT(copper-sided view)

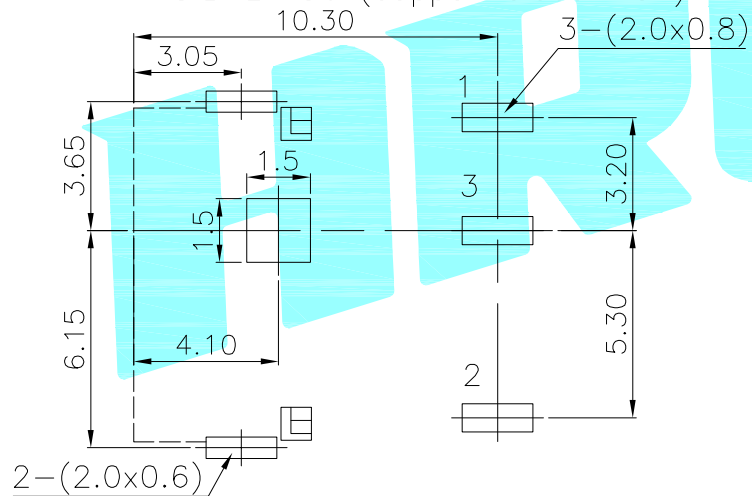

Rating:0.5A 30V DC  
 Contact Resistance:100 m $\Omega$  Max.  
 Operating temperature:-20 $^{\circ}$ C~70 $^{\circ}$ C  
 Operating force:3~20N  
 Operating Life:5,000cycles

Model No.	A=1.4,H=3	DC-044A-A	DC-044A-B
	A= $\phi 1.5$ ,H=3	DC-044F-A	DC-044F-B
	A=1.6,H=3	DC-044G-A	DC-044G-B
	A=1.4,H=1	DC-044H-A	DC-044H-H
Schematic			

Model No.	1	2	3
PIN	$\phi 1.65$	$\phi 2.0$	$\phi 2.5$

②	Terminal	3	Phosphor bronze	Au Plating				
①	Housing	1	Nylon	Black				
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK		
APPROVALS			DATE	 ELECTRONICS CO.,LTD				
DRAWN	J.X.Zhang	2013/11/11	TITLE: PHONE JACKES					
APPROVALS			PART NO. DC-044A					
TOLERANCES ARE		30~以上	$\pm 0.30$	ANGLE	UNIT: mm	SCALE: 1:1	PROJ:	
		10~30	$\pm 0.20$					DRAWING NO.
		5~10	$\pm 0.15$	~ 2'				
		~ 5	$\pm 0.10$					

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			