


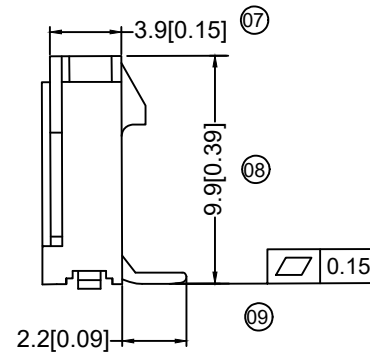
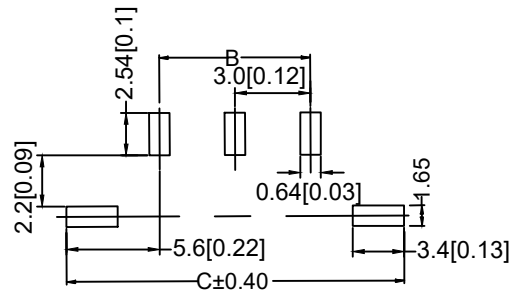


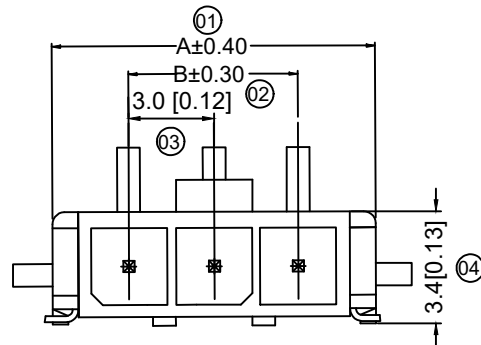

AUTODESK

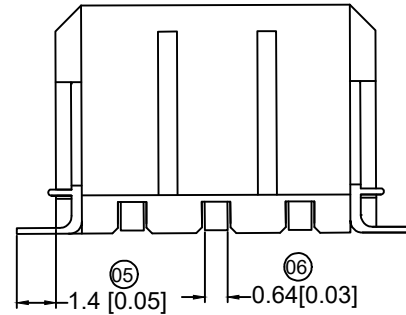

3025 W V S- XX D-LP

01 02 03 04 05 06 07

- 01 Series No.
02 Category :
W-wafer
03 Welding Board Angle:
V-180
04 Welding Way:
S-SMT
05 Row No.-Pin No.
XX-Single row
06 Special NO.
D-Solder Tabs
07 Material :
LP-LCP 94V-0

Poles	Dimensions mm		
	A	B	C
02	9.70	3.00	12.50
03	12.70	6.00	15.50
04	15.70	9.00	18.50
05	18.70	12.00	21.50
06	21.70	15.00	24.50
07	24.70	18.00	27.50
08	27.70	21.00	30.50
09	30.70	24.00	33.50
10	33.70	27.00	36.50
11	36.70	30.00	39.50
12	39.70	33.00	42.50

3025 WVS-XXD	LCP UL 94V-0	Brass	Tin Plated Fog	Brass	Tin Plated Fog	3025WVS
3025 WVS-XXD	LCP UL 94V-0		Tin-Plated		Tin-Plated	
PART NO	Material	Material Pin	Finish Pin	Material Solder(Tabs)	Finish Solder(Tabs)	

Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 5A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -25 C 85 C
- Insulation resistance: 1000M
- Contact resistance: 10m
- After environmental testing : 20m
- Mark " " Indicate Dimensions Need To Controlled In Emphasis

		new		2015/5/3		A			
ECN BO.		DESCRIPTION.		DATE.		REV.			
DESIGNED	CHECKED	APPROVAL	DRAWING NUMBER			SCALT: 1/2		SCALE: 3:1	
Mikey	Tom	Jerry	PART NAME	3025WVS-10D	UNLESS OTHERWISE SPECIFIED,TOLERANCE:		X. ±0.25		
			MODEL NAME	3025WVS-10D			X.x ±0.20		
			3RD ANGLE PROJ	HANYONES TECH CO.,LTD		X.xxx ±0.15			
						ANGULAR ±3'			
						FILE. NO.			