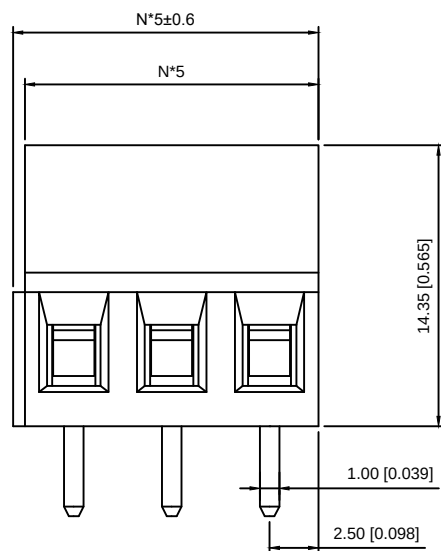


额定电压 (Rated volltage): 300V 320V

额定电流 (Rated Current): 24A 24A

接触电阻 (Contact resistance): 20MΩ

绝缘电阻 (Insulation resistance): 500MΩ/DC500V

使用线径 (Wire range): 0.75-2.5mm/26-14

耐电压 (Wirth standing volltage): 1.6KV

温度范围 (Tenp Range): -40~+105℃

极数 (Poles): 2P-24P

材质和电镀 (Materrial)

塑件 (Housing): PA66, UL94V-0

螺丝 (Screws): M3, 钢, 镀Cr3+钝化彩锌

焊脚 (Pin header): 黄铜, 镀锡

_____		new		2015/5/3		A			
ECN BO.		DESCRIPTION.		DATE.		REV.			
DESIGNED	CHECKED	APPROVAL	DRAWING NUMBER				SCALT: 1/2	SCALE: 3:1	
Mikey	Tom	Jerry	PART NAME	128-5.0-04		UNLESS OTHERWISE SPECIFIED,TOLERANCE:	X. ±0.25		
			MODEL NAME	128-5.0-04			X.x ±0.20		
					X.xx ±0.15				
			3RD ANGLE PROJ	HANYONES TECH CO.,LTD				FILE. NO.	