
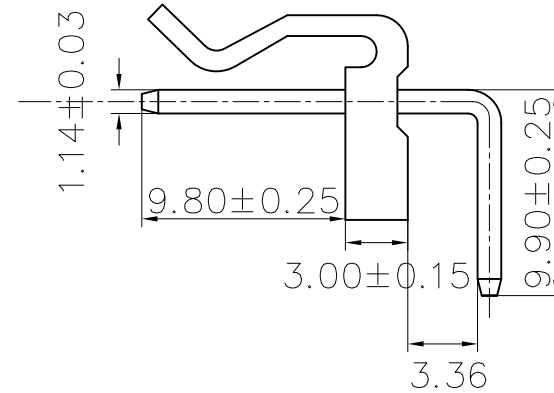
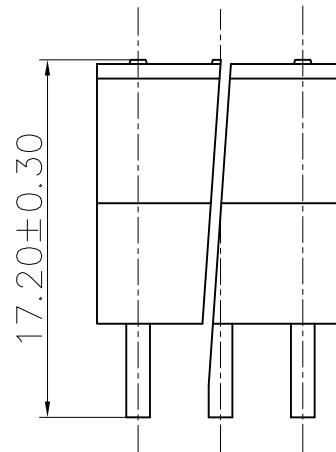


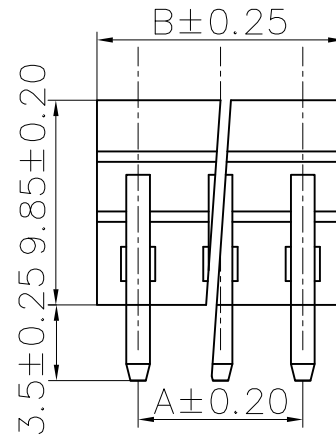

2Y-8Y	9Y-16Y
A±0.20	A±0.40
B±0.25	B±0.45

16	8672WR-16	59.40	63.36
15	8672WR-15	55.44	59.40
14	8672WR-14	51.48	55.44
13	8672WR-13	47.52	51.48
12	8672WR-12	43.56	47.52
11	8672WR-11	39.6	43.56
10	8672WR-10	35.64	39.60
9	8672WR-09	31.68	35.64
8	8672WR-08	27.72	31.68
7	8672WR-07	23.76	27.72
6	8672WR-06	19.80	23.76
5	8672WR-05	15.84	19.80
4	8672WR-04	11.88	15.84
3	8672WR-03	7.92	11.88
2	8672WR-02	3.96	7.92
Circuits	180°	A	B
	Part No.	Dimension(mm)	

Dimensional & Ordering Information

poles	2-16 poles
Pitch between ploe	3.96mm
Rated Voltage	250V AC,DC
Rated current	5.0A
Withstand Voltage	800V.AC/minute
Insulation Resistance	≥1000MΩ
Applicable Wire	AWG#22~#28

		new		2015/5/3		A			
ECN BO.		DESCRIPTION.		DATE.		REV.			
DESIGNED	CHECKED	APPROVAL	DRAWING NUMBER			SCALT: 1/2		SCALE: 3:1	
Mikey	Tom	Jerry	PART NAME	8672WR-02	UNLESS OTHERWISE SPECIFIED,TOLERANCE:		X. ±0.25		
			MODEL NAME	8672WR-02			X.x ±0.20		
			3RD ANGLE PROJ	HANYONES TECH CO.,LTD		X.xx ±0.15			
							ANGULAR ±3°		
							FILE. NO.		