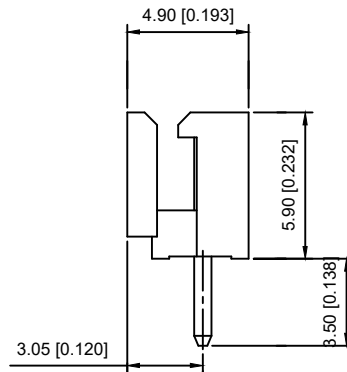
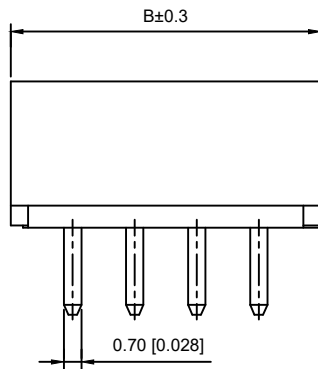

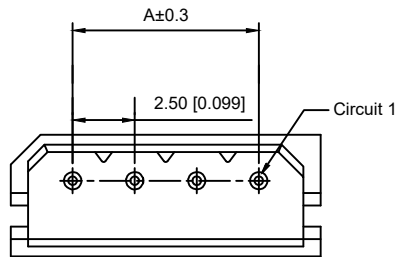


■ Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -25 C 85 C
- Insulation resistance: 1000M
- Contact resistance: 20m
- After environmental testing : 30m

2564 W V-XX
① ② ③ ④

- ① Series No.
- ② Category : W-WAFER
- ③ Wedding Board Angle : V-Stright 180
- ④ Row No.-Pin No.: XX-02P 16P

Poles	Dimensions mm		Poles	Dimensions mm	
	A	B		A	B
02	2.50	7.50	12	27.50	32.50
03	5.00	10.00	13	30.00	35.00
04	7.50	12.50	14	32.50	37.50
05	10.00	15.00	15	35.00	40.00
06	12.50	17.50	16	37.50	42.50
07	15.00	20.00			
08	17.50	22.50			
09	20.00	25.00			
10	22.50	27.50			
11	25.00	30.00			

2564WV-XX	Nylon 66 UL 94V-0	Brass	Tin-Plated	2564H
PART NO	Material	Material pin	Finish pin	Suitable Terminal

		new		2015/5/3		A			
ECN BO.		DESCRIPTION.		DATE.		REV.			
DESIGNED	CHECKED	APPROVAL	DRAWING NUMBER			SCALT: 1/2		SCALE: 3:1	
Mikey	Tom	Jerry	PART NAME	2564WV-05	UNLESS OTHERWISE SPECIFIED,TOLERANCE:		X. ±0.25		
			MODEL NAME	2564WV-05			X.x ±0.20 X.xxx ±0.15 ANGULAR ±3'		
			3RD ANGLE PROJ	HANYONES TECH CO.,LTD					FILE. NO.