
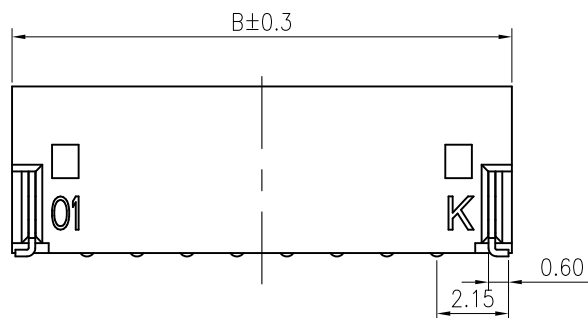
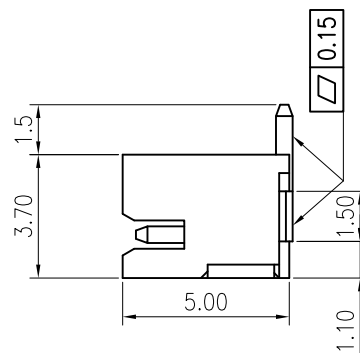
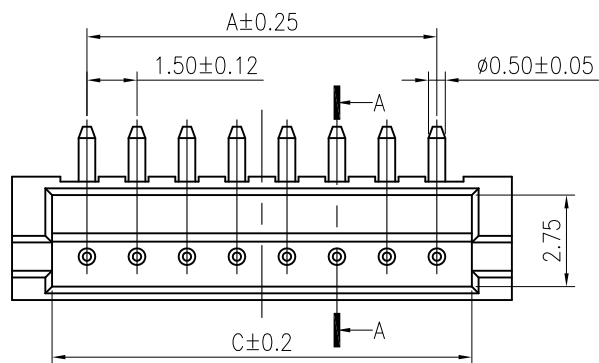


SECTION A-A

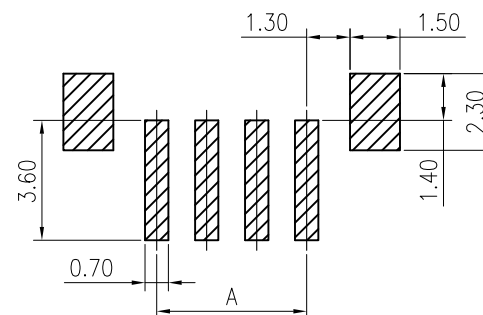

Recommended P.C.Board Layout

◆ SPECIFICATIONS

- Current rating: 1A AC, DC
- Voltage rating: 100V AC, DC
- Temperature range: -40°C ~ +105°C
- Insulation resistance: 500MΩ Min.
- Withstanding voltage: 500V AC/ minute.
- Contact resistance: 20mΩ Max.

Material:

Insulator: Nylon 9T UL 94V-0

Contact: Brass

Plating: Tin plated over Nickel

CKT.	A	B	C
2	1.50	6.00	3.60
3	3.00	7.50	5.10
4	4.50	9.00	6.60
5	6.00	10.50	8.10
6	7.50	12.00	9.60
7	9.00	13.50	11.10
8	10.50	15.00	12.60
9	12.00	16.50	14.10
10	13.50	18.00	15.60
11	15.00	19.50	17.10
12	16.50	21.00	18.60
13	18.00	22.50	20.10
14	19.50	24.00	21.60
15	21.00	25.50	23.10
16	22.50	27.00	24.60

_____		new			2015/5/3		A			
ECN BO.		DESCRIPTION.			DATE.		REV.			
DESIGNED	CHECKED	APPROVAL	DRAWING NUMBER				SCALT: 1/2		SCALE: 3:1	
Mikey	Tom	Jerry	PART NAME	1502WVS-16		UNLESS OTHERWISE SPECIFIED, TOLERANCE:		X. ±0.2		
			MODEL NAME	1502WVS-16				X.xx ±0.2 ANGULAR ±0.15		
			3RD ANGLE PROJ	HANYONES TECH CO.,LTD					FILE. NO.	