

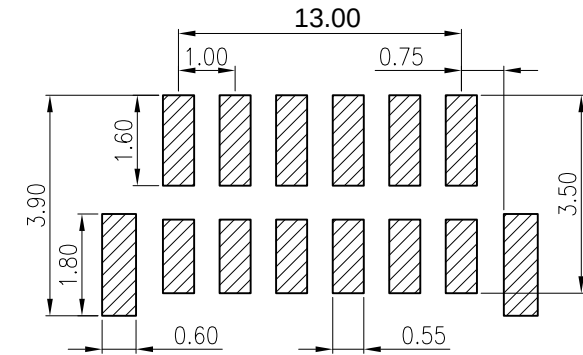
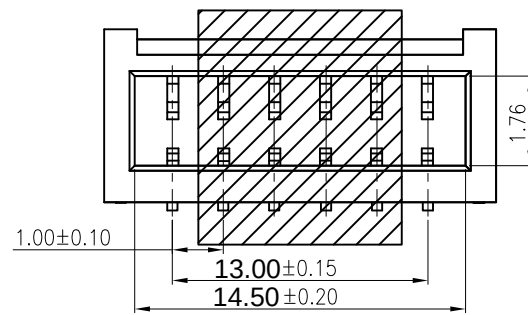



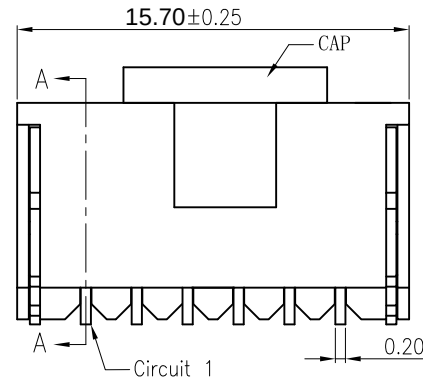

P.C.B Layout

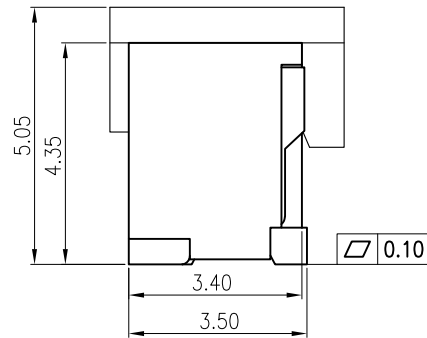

SECTION A-A
SCALE 1:1

Poles	Dimensions(mm)		
	A	B	C
02	1.00	3.70	2.50
03	2.00	4.70	3.50
04	3.00	5.70	4.50
05	4.00	6.70	5.50
06	5.00	7.70	6.50
07	6.00	8.70	7.50
08	7.00	9.70	8.50
09	8.00	10.70	9.50
10	9.00	11.70	10.50
11	10.00	12.70	11.50
12	11.00	13.70	12.50
13	12.00	14.70	13.50
14	13.00	15.70	14.50
15	14.00	16.70	15.50
16	15.00	17.70	16.50
17	16.00	18.70	17.50
18	17.00	19.70	18.50
19	18.00	20.70	19.50
20	19.00	21.70	20.50

NOTES:

- Material:
Insulation: PA9T, UL94V-0(White)
Pin:Phosphor bronze/Tin-Plated
Tab:Phosphor bronze/Tin-Plated
- Current Rating: 1A AC,DC
- Voltage Rating: 125V AC,DC
- Temperature Rang: -25°C~+85°C
- Stroage Temperature Rang: <30°C 60%RH
- Contact Resistance: 20mΩ Max
- Insulation Resistance: 100MΩ Min
- Withstanding Voltage: 500V AC/minute
- Ordering Code: A1001VSL-x

		new		2015/5/3		A			
ECN BO.		DESCRIPTION.		DATE.		REV.			
DESIGNED	CHECKED	APPROVAL	DRAWING NUMBER			SCALT: 1/2		SCALE: 3:1	
Mikey	Tom	Jerry	PART NAME	1002WVS-14B	UNLESS OTHERWISE SPECIFIED,TOLERANCE:		X. ±0.25		
			MODEL NAME	1002WVS-14B			X.x ±0.20 X.xxx ±0.15 ANGULAR ±3'		
			3RD ANGLE PROJ	HANYONES TECH CO.,LTD				FILE. NO.	