

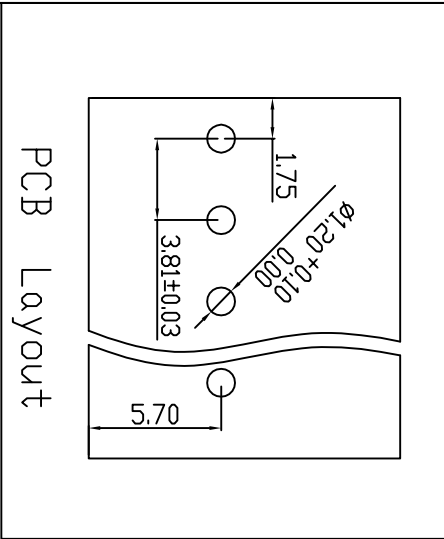
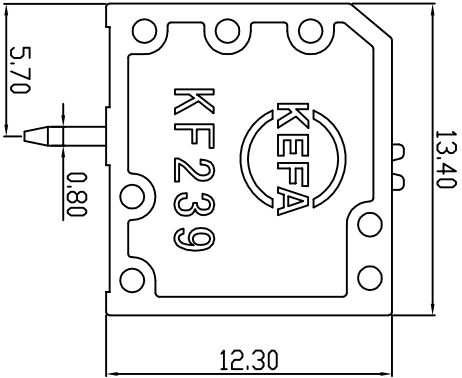


linear dimension (tolerances Standard GB/T 14486-2008)										—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 10			
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60		

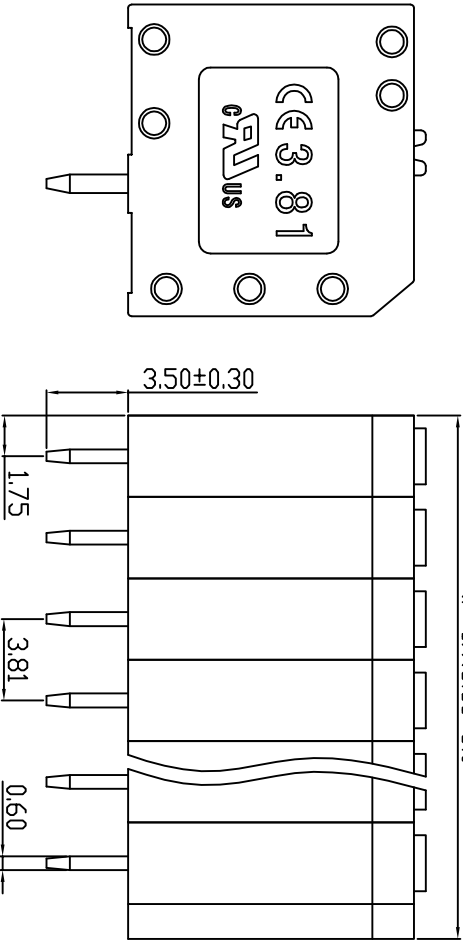

PCB Layout

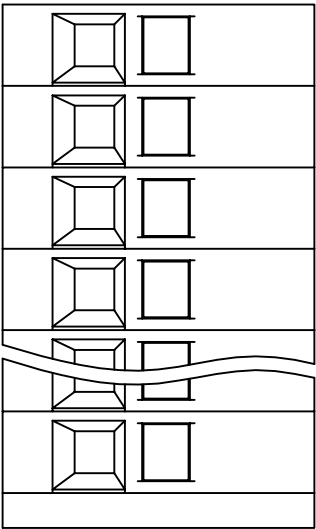

REVISION RECORD			
REV.	DESCRIPTION	ECN No.	APPROVED DATE



UL/CUL 技术参数

UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage	M	300	- 300
额定电流	Rated Current	A	6	- 10
接线范围	Wire Range	28-14		
单/多芯线	Solid/Stranded	[AWG]		
耐电压	Withstanding Voltage	1600V/1min		

IEC 技术参数



IEC Technical Data				
过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage	M	160	160 320
额定电流	Rated Current	A	6	6 6
额定冲击电压	Impulse withstand voltage	[kV]	2.5	2.5 2.5
导线截面积	Conductor cross section	1.5		
硬质/柔性导线	Solid/flexible	[mm ²]		

材料

绝缘材料	Insulation Material	PA66
阻燃等级	Inflammability	UL94V-0
导体材料	Conductor Material	铜合金 Copper alloy
导体表面镀层	Conductive Coating	镀锡 Tin Plated

一般参数

间距	Pitch	[mm]	3.81
极数	Poles	P	02-XX
引线长度	Stripping Length	[mm]	9-10
螺丝	Screw/扭矩 Torque(Max)	[N.m]	-
工作温度	Operating temperatur	[°C]	-40-105
引脚尺寸	Pin Dimensions	[mm]	3.5
PCB板孔径	PCB Hole Diameter	[mm]	1.2

DES.	DATE	DES.	DATE
CHK.	DATE	CHK.	DATE
APP.	DATE	APP.	DATE

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1
名称 / TITLE	KEFA 慈溪市科发电子有限公司 KEFA ELECTRONIC CO., LTD				
第三视角 / THIRD ANGLE PROJECTION					
版本 / REV	A				