
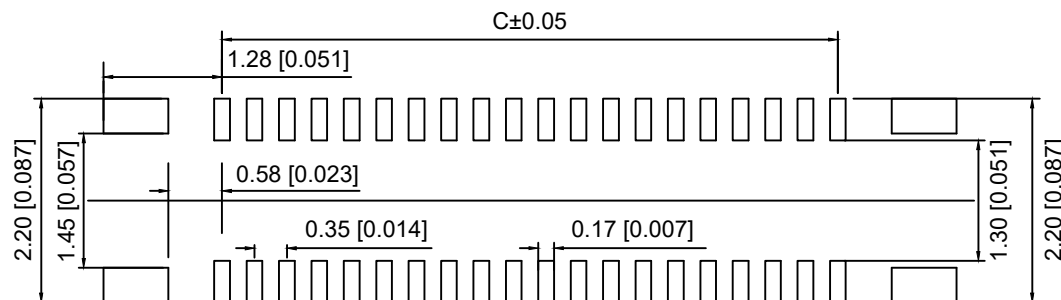

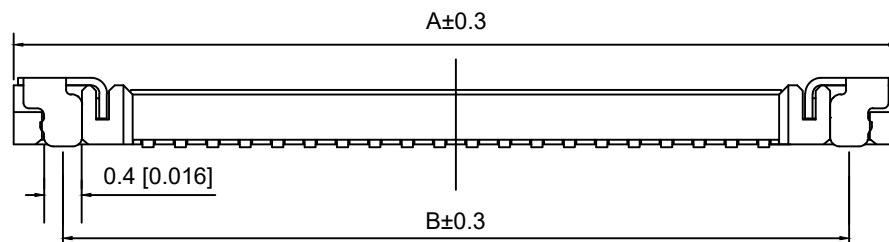


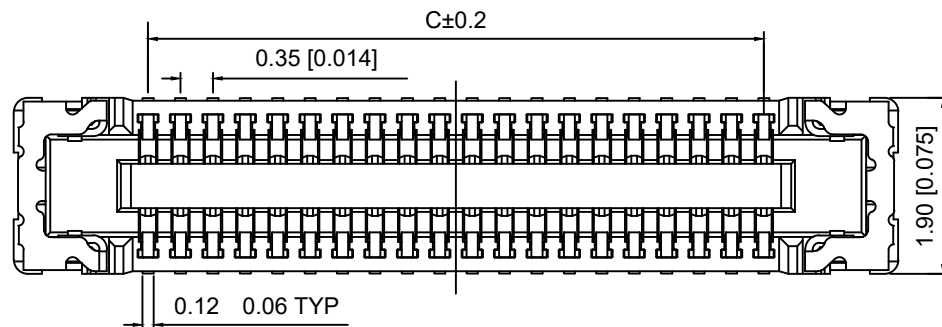

Recommended PCB Layout

Specifications:

规格:

Voltage rating:30V AC/DC

额定电压: 30V AC/DC

Current rating:3A AC/DC

额定电流: 3A AC/DC

Withstanding voltage:100V AC/minute

耐受电压: 100V AC/分钟

Temperature range:-35℃- 85℃

温度范围: -35℃- 85℃

Insulation resistance:50M min

绝缘电阻: 50M Min

Contact resistance:90m Max

接触电阻: 90m Max

3500 F V S - XX X
① ② ③ ④ ⑤ ⑥

1.Series No

2.Category:Female

3.Welding Board Angle:V-Straight 180

4.Welding Way:S-SMT

5.Row No.Pin No:XX-10Pin-60Pin

6.High:A 0.7mm

Mating Height 0.7mm

7.Material:LP-LCP UL 94V-0 Black

8.Plating:V01-Gold Flash

Poles	A	B	C
10	4.30	3.23	1.40
24	6.75	5.68	3.85
30	7.80	6.73	4.90
34	8.50	7.43	5.60
38	9.20	8.13	6.30
40	9.55	8.48	6.65
50	11.30	10.23	8.40
60	13.05	11.98	10.15

3500FVS-XXX	LCP UL 94V-0	Copper Alloy	3500W
PART NO	Material	Material Pin	Suitable H Y Wafer

_____		new		2015/5/3		A			
ECN BO.		DESCRIPTION.		DATE.		REV.			
DESIGNED	CHECKED	APPROVAL	DRAWING NUMBER			SCALT: 1/2		SCALE: 3:1	
Mikey	Tom	Jerry	PART NAME	3500FVS-60A	UNLESS OTHERWISE SPECIFIED,TOLERANCE:		X. ±0.25		
			MODEL NAME	3500FVS-60A			X.x ±0.20 X.xx ±0.15 ANGULAR ±3'		
			3RD ANGLE PROJ	HANYONES TECH CO.,LTD				FILE. NO.	