
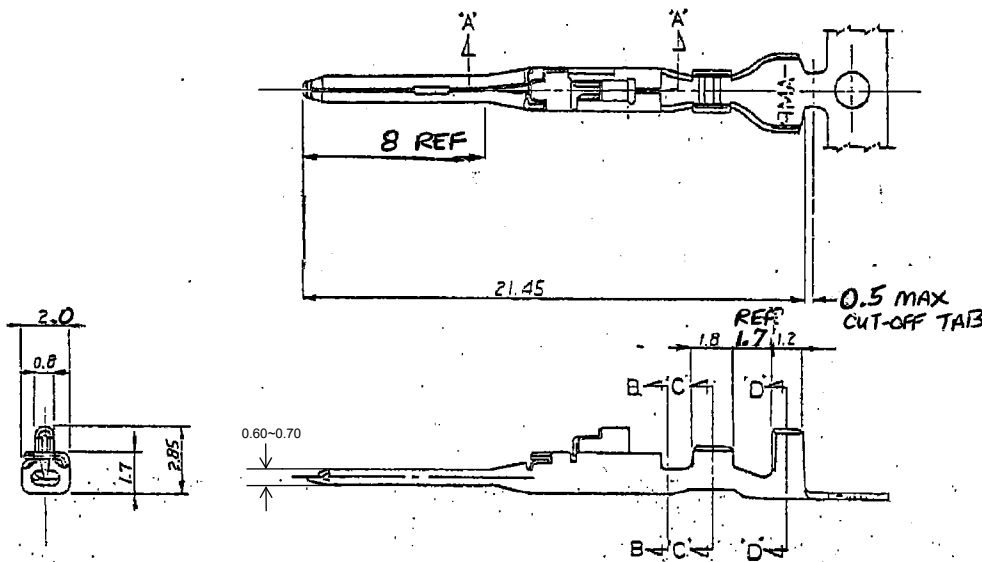




4

3


2

第三角法 (THIRD ANGLE PROJECTION)

断面 C-C
(SECT.)断面 D-D
(SECT.)

- 注: 1. 通用規格
製品規格 108-5302
取付通用規格 114-5142
2. 取扱説明書 IS-503T

- NOTES: 1. APPLICABLE SPEC.
PRODUCT SPEC. 108-5302
APPLICATION SPEC. 114-5142
2. INSTRUCTION SHEET IS-503T

断面 B-B
(SECT.)断面 A-A
(SECT.)

	NYE製: 502H-20-UV (NYE: 502H-20-UV 117"カチオ化処理 (APPLIED LUBRICANT OIL))	錫めき溶黄銅 (PRE-TINNED BRASS)	175149-3
175153-2		錫めき溶黄銅 (PRE-TINNED BRASS)	175149-2
175153-1		錫めき溶銅合金 (PRE-TINNED COPPER ALLOY)	175149-1
パラ状端子型番 (L.P. P/N)	仕上 (FINISH)	材料 (MATERIAL)	型番 (P/N)

WIRE RANGE		INSULATION DIA	NAME (TAB CONTACT AMP. UNIVERSAL POWER CONN.)
0.12-0.35mm (AWG #26-#22)		1.2-2mm	77-コネクタ, アンバーユニバーサルパワーコネクタ
MATERIAL USE TABLE		SEE INSTRUCTION SHEET	
C2 REV ECR M-006821		表参照	
C1 REV PER ECO-11-005030		表参照	
LTR		2E (REVISION RECORD)	
DR		CHK	
DATE		DATE	

FIG. 11 DIMENSIONS IN MM. DO NOT SCALE PRINT

PRINT DATE