






H=3.8,4.3,4.5,5.0,5.5,6.0,6.5,7.0,7.5,8.0

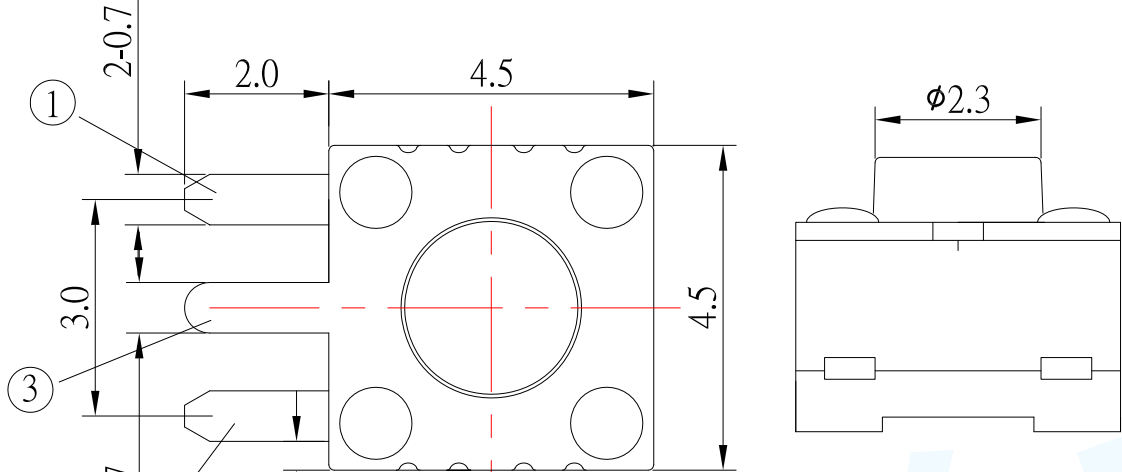

CIRCUIT DIAGRAM

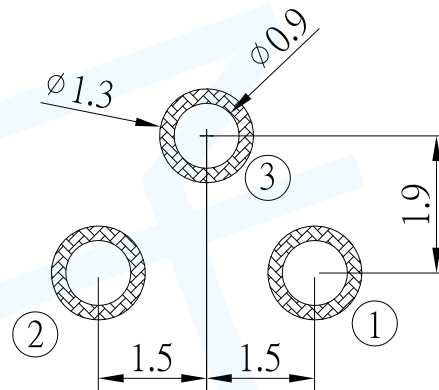

PCB LAYOUT

SPECIFICATIONS

Rating	DC 12V 50mA.	
Insulation Resistance	50M Min.	
Contact Resistance	100m Max.	
Travel	0.15 ± 0.1mm	
Operating Force	2   160 ± 50gf	3   260 ± 50gf
Operating Life (cycles)	80,000	

NO	NAME	MATERIAL	QTY	FINISHING
7				
6				
5	TERMINAL	BRASS	2	Ag plated
4	CONTACT	SUS	1	Ag plated
3	COVER	BRASS	1	Ag plated
2	BASE	PPA	1	Black
1	STEM	PA46	1	Black

单位 UNIT	mm	一般公差 GENERAL TOLERANCE		东莞市台溢电子有限公司			
制图 DRAW	杜娟	.X±0.5	ANGLES				
设计 DESIGN	李海斌	.XX±0.2	X±5	公司网址: Company website	http://www.tydz888.com		
审核 CHECKED	谭兵	.XXX±0.1	.X±2	名称 TITLE	轻触开关		
校 STANDARD	彭勇	行程 Travel	0.22 ± 0.1	型号 MODEL	T1-A0411	日期 DATE	2018/05/12
批准 APPROVE	肖辉华	重量 WT.		角法 PROJ.		比例 SCALE	1:1
		表面 SA.		版本 REV.	AO		