


SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25°C~+85°C
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 800V AC/minute
- 7、Material: Wafer Nylon66, UL94V-0
PIN Brass Tin-plated

编 号	尺寸 (mm)	
	A	B
HC-PHD-2*2AKK	2.00	6.00
HC-PHD-2*3AKK	4.00	8.00
HC-PHD-2*4AKK	6.00	10.00
HC-PHD-2*5AKK	8.00	12.00
HC-PHD-2*6AKK	10.00	14.00
HC-PHD-2*7AKK	12.00	16.00
HC-PHD-2*8AKK	14.00	18.00
HC-PHD-2*9AKK	16.00	20.00
HC-PHD-2*10AKK	18.00	22.00
HC-PHD-2*11AKK	20.00	24.00
HC-PHD-2*12AKK	22.00	26.00
HC-PHD-2*13AKK	24.00	28.00
HC-PHD-2*14AKK	26.00	30.00
HC-PHD-2*15AKK	28.00	32.00
HC-PHD-2*16AKK	30.00	34.00
HC-PHD-2*17AKK	32.00	36.00
HC-PHD-2*18AKK	34.00	38.00
HC-PHD-2*19AKK	36.00	40.00
HC-PHD-2*20AKK	38.00	42.00

PCB LAYOUT

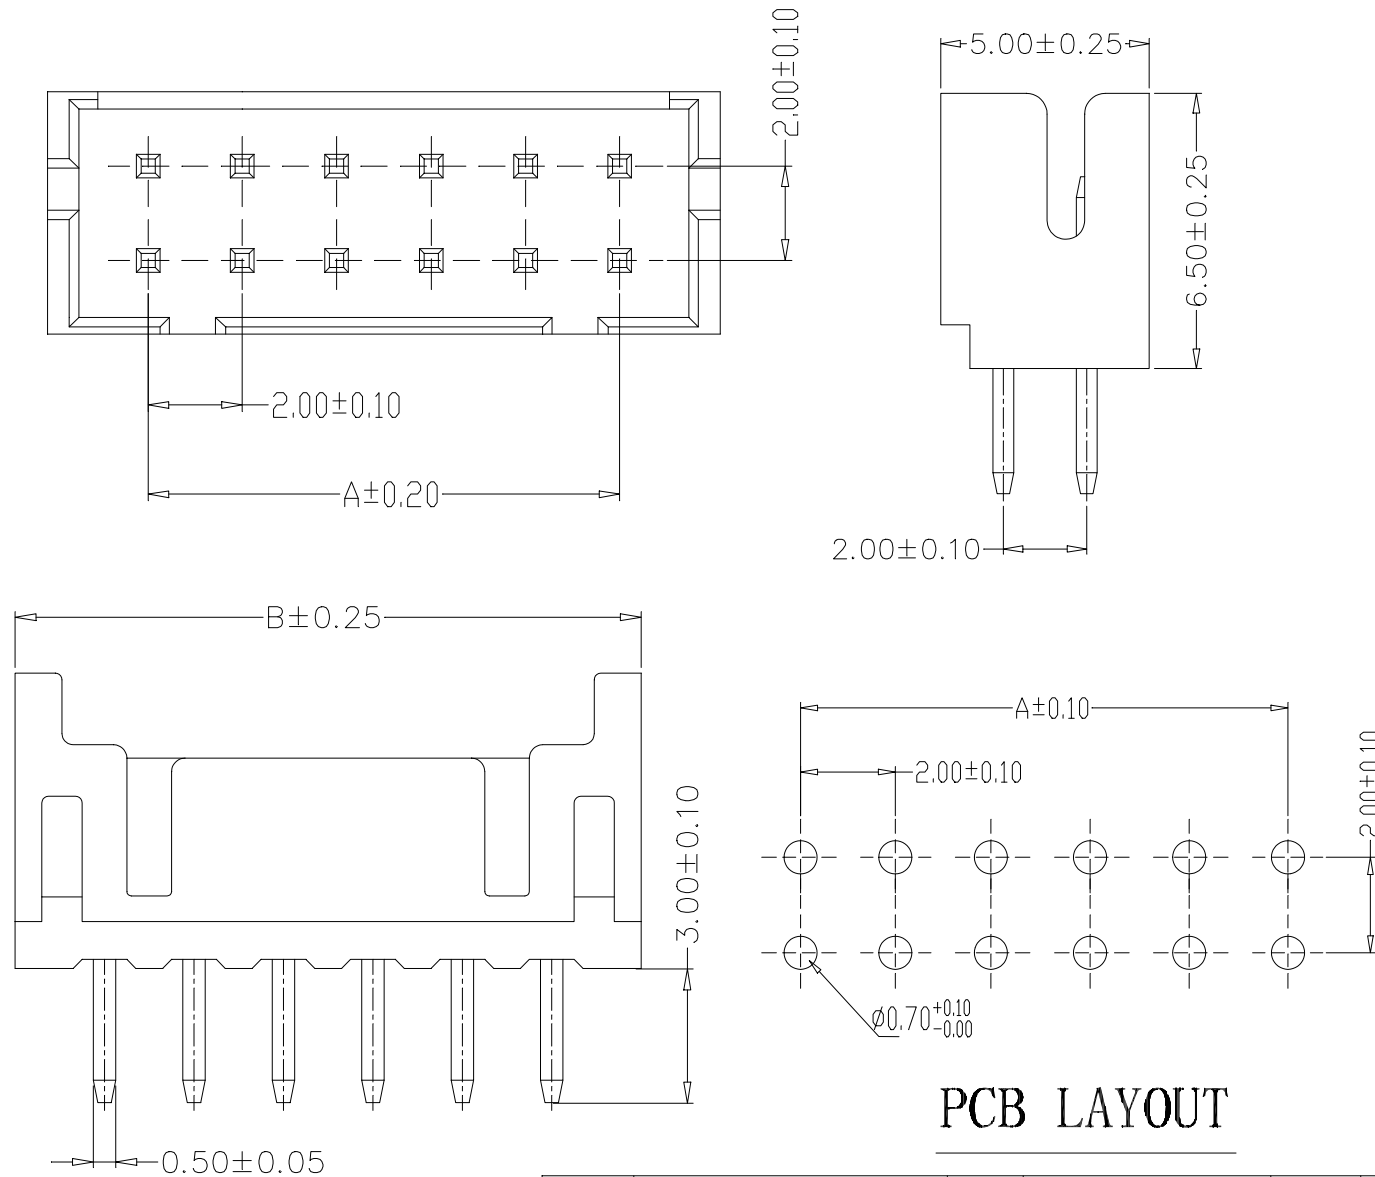

制图 DRAWN	变更内容 DESCRIPTION	日期 DATE	GENERAL TOLERANCE		制图 DRAWING	钱岳生		料号 PART NO.	HC-PHD-2*NAWKK		版本 REV.	页次 SHEET	A			
			X.±0.25	X.*±2'		审核 CHECK	2013、07、01		品名 TITLE	PHD弯针						
			.X±0.20	.X*±1'			2013、07、03			客户料号 CUTL. NO.				WAFER DIP TYPE		
			.XX±0.15	.XX*±0.5'			2013、07、05									
.XXX±0.10	.XXX*±0.5'	单位 UNITS	MM	比例 SCALE	1:1	深圳市华灿天禄电子有限公司										