



REV.	ECN. NO.	APPD.
A		

NOTES:  
 Current Rating:3.0AMP  
 Contact Resistance:20mΩ max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ min  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact plating:Au or Sn Over Ni  
 Insulator Material:PBT or PA6T+30%GF(UL94V-0)

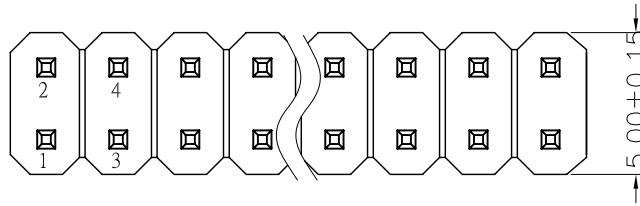



Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE ±0.05)

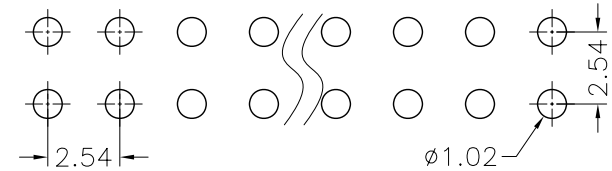


## Ordering Information

MTP125-12XXS1- X

┌───┐ └───┘	No.of Pins per Row: 01~40	┌───┐ └───┘	Colour R : red Y : yellow W : white G : green B : blue
----------------	------------------------------	----------------	---

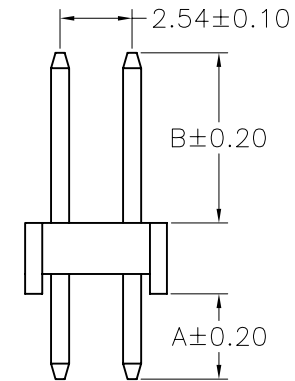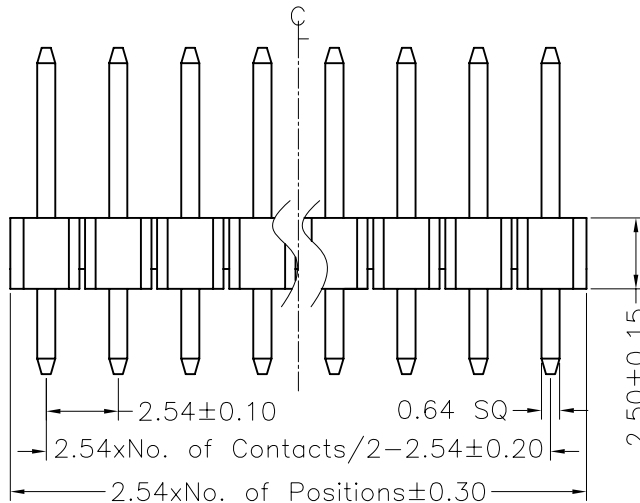

Dimension antitheses list		
ITEM	A	B
Standard	3.00	6.00
Alternate		

X. ± 0.30	X.° ± 5°	UNITS mm	NAME(INTENDED USE)	MINTRON CO.,LTD.						
.X ± 0.20	.X° ± 2°	MAT'L			PART NO.(INTENDED USE)	TITLE: MTP125-12XXS1-X				
.XX ± 0.10	.XX° ± 1°	FINISH	APPD: SUNNY	DWG NO.:						
.XXX ± 0.05	.XXX° ± 0.5°	Q'TY	CHKD: LISA		 <table border="1"> <tr> <td>SCALE</td> <td>SHEET</td> <td>REV.</td> </tr> <tr> <td>1/1</td> <td>1/1</td> <td>A</td> </tr> </table>	SCALE	SHEET	REV.	1/1	1/1
SCALE	SHEET	REV.								
1/1	1/1	A								
PIN HEADER CONNECTOR			DR: ZOE	2006-11-28						