







ABF2 THRU ABF10

Voltage Range - 200 to 1000 V olts Current - 1.2Ampere

SINGLE PHASE GLASS PASSIVATED BRIDGE RECTIFIERS

Features

- ◆ Ideal for printed circuit board
- ◆ Reliable low cost construction utilizing molded plastic technique
- ◆ High temperature soldering guaranteed: 260°/10 seconds at 5 lbs., (2.3kg) tension
- ◆ Small size, simple installation
- ◆ High surge current capability
- ◆ Glass passivated chip junction



Mechanical Data

Case : JEDEC ABF Molded plastic body
Terminals : Solder plated, solderable per MIL-STD-750, Method 2026
Polarity : Polarity symbol marking on body
Mounting Position : 82mg 0.0029oz

Dimensions in inches and (millimeters)

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Parameter	SYMBOLS	MDD ABF2	MDD ABF4	MDD ABF6	MDD ABF8	MDD ABF10	UNITS	
Marking Code								
Maximum repetitive peak reverse voltage	V_{RRM}	200	400	600	800	1000	V	
Maximum RMS voltage	V_{RMS}	140	280	420	560	700	V	
Maximum DC blocking voltage	V_{DC}	200	400	600	800	1000	V	
Maximum average forward rectified current	$I_{F(AV)}$	1.2						A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	40						A
Maximum instantaneous forward voltage drop per leg at 1.2A	V_F	1.1						V
Maximum DC reverse current at rated DC blocking voltage	I_R	5 100						uA
Typical thermal resistance	$R_{\theta JA}$	70						°C/W
	$R_{\theta JC}$	18						
Typical junction capacitance	C_j	18						pF
Operating temperature range	T_J	-55 to +150						°C
storage temperature range	T_{STG}	-55 to +150						°C

Note: 1. Measured at 1MHz and applied reverse voltage of 4 V D.C.
 2. Mounted on glass epoxy PC board with 4×1.5"×1.5" (3.81×3.81 cm) copper pad.



ABF2 THRU ABF10

Voltage Range - 200 to 1000 V olts Current - 1.2Ampere

Ratings And Characteristic Curves

Fig.1 Average Rectified Output Current Derating Curve

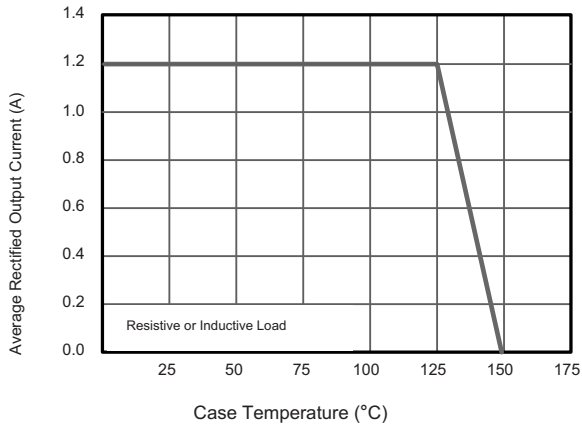


Fig.2 Typical Reverse Characteristics

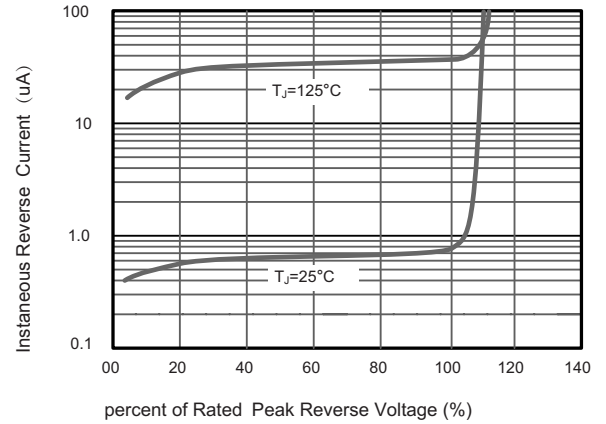


Fig.3 Typical Instantaneous Forward Characteristics T_J=25°C

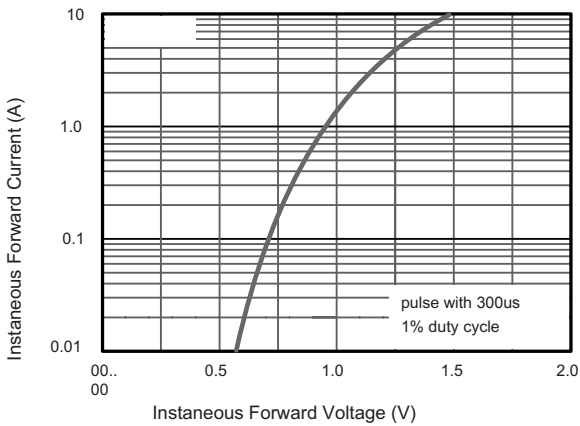


Fig.4 Typical Junction Capacitance



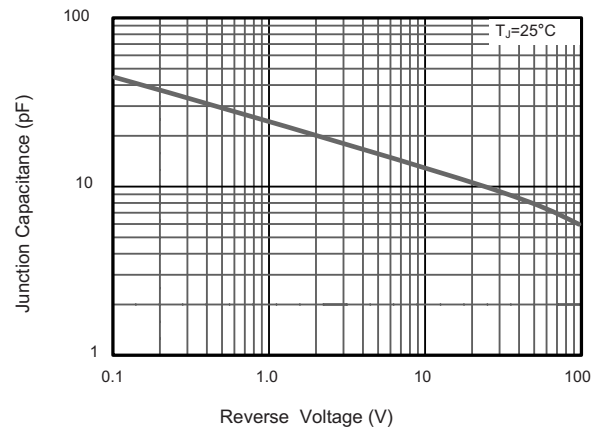


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current

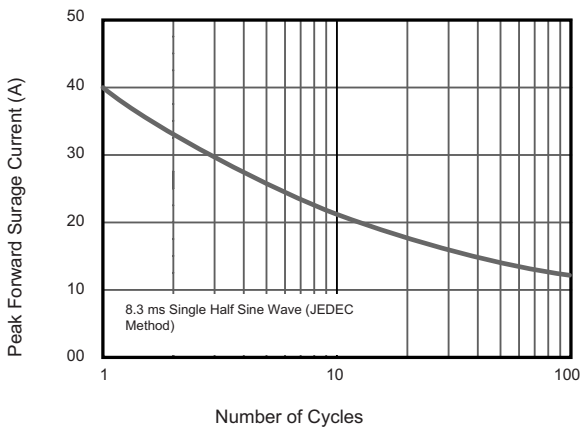

The curve above is for reference only.

Suggested Pad Layout

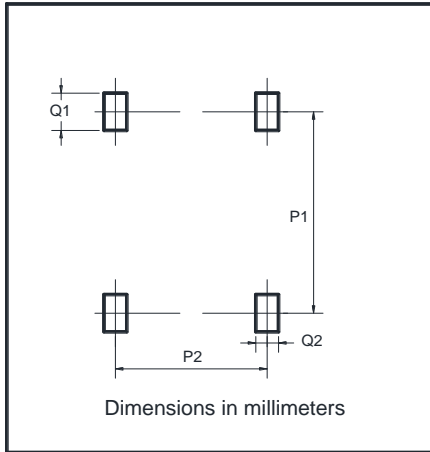

Dim	Min
P1	5.72
P2	4.00
Q1	1.00
Q2	0.90

Important Notice and Disclaimer

Microdiode Electronics (Jiangsu) reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

Microdiode Electronics (Jiangsu) makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, not does Microdiode Electronics (Jiangsu) assume any liability for application assistance or customer product design. Microdiode Electronics (Jiangsu) does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of Microdiode Electronics (Jiangsu).

Microdiode Electronics (Jiangsu) products are not authorized for use as critical components in life support