

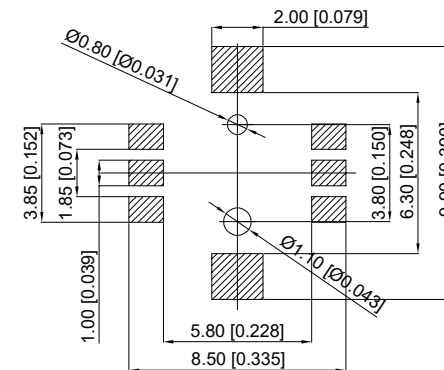


CIRCUIT DIAGRAM

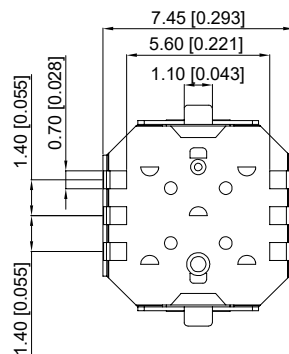

P.C.B LAND DIMENSION

Maximum Ratings	DC 12V 50mA	
Contact Resistance	100mΩ Max	
Insulation Resistance	100MΩ Min	
Withstand Voltage	AC 250V Min	
Operating Force	4 Direction	240±50gf
	Center	360±50gf
Travel	4 Direction	0.25±0.1mm
	Center	0.15±0.1mm
Operating Life(cycles)	200,000	
Working temperature	-20℃ ~ +70℃	

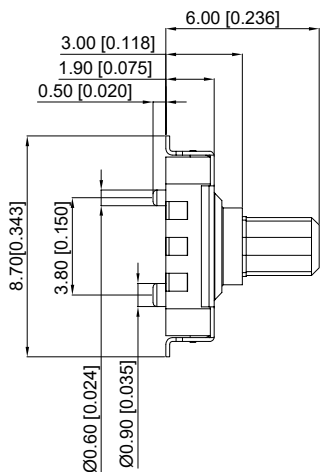

6	Cover 盖板	SUS	1	Ag plating 镀银
5	Plum Blossom Button 梅花钮	PA46	1	Black 黑色
4	Stem 按钮	LCP	1	Black 黑色
3	Contact Form 弹片	SUS	2	Silver coated
2	Housing 基座	LCP	1	Black 黑色
1	Terminal 端子	Phosphor copper 磷铜	1	Ag plating 镀银
NO 序号	PART NAME 部件名	MATERIAL 材料	QTY 数量	REMARK 备注

A4				
A3				
A2				
A1				
REV	DATE	REVISION	DESCRIPTION	ISSUE



COMMON TOLERANCE

X.XX	± 0.10
X.X	± 0.15
X	± 0.25
ANGULAR	—

UNIT	MM	PROJECTED		PRODUCT NAME:
DRAWN BY	FUYUAN	CHECKED BY	COCO	MODEL NO: TP-0207-2
DATE	2019	APPROVAL B	ALEN	Https: www.rocpu.tw
<b>ROCPU TECHNOLOGY CO.,LTD</b>				
Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basis of manufacture or sale of apparatus without permission				