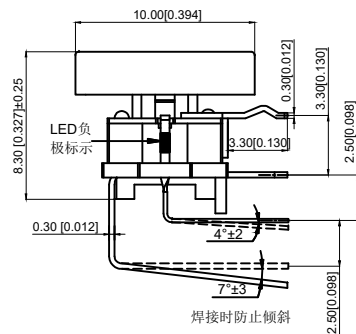


NOTES:

1. Rating: 12VDC 50mA
1. 额定值: 12VDC 50mA
2. Dielectric Strength: 250V AC
2. 耐电压: 250V AC
3. Contact Resistance: $\leq 100\text{m}\Omega$ Max
3. 接触电阻: $\leq 100\text{m}\Omega$
4. Insulation Resistance: $\geq 100\text{M}\Omega$
4. 绝缘电阻: $\geq 100\text{M}\Omega$

5. Operating Force: $260 \pm 50\text{gf}$

5. 操作力: $260 \pm 50\text{gf}$

6. Life: 100,000 times





6. 寿命: 100,000 times

7. Travel: $0.25 \pm 0.1\text{mm}$

7. 行程: $0.25 + 0.1\text{mm}$

8. Operating Temperature: -20 to $+70^\circ\text{C}$

8. 使用温度: -20 to $+70^\circ\text{C}$



8	Key cap 按键帽	ABS	1	
7	Positioning frame 定位框架	Iron	2	Ag plating 镀银
6	Upper cover 上盖	PET	1	
5	LED		1	Green 绿灯
4	Button 按钮	PA66	1	
3	Shrapnel 弹片	Brass	1	Ag plating 镀银
2	Pedestal 基座	PA66	1	
1	Terminal 端子	Brass	4	Ag plating 镀银
NO 序号	Part name 部件名	Material 材料	QTY 数量	Remark 备注

A4				 ROCPCU	COMMON TOLERANCE		UNIT	MM	PROJECTED		PRODUCT NAME:
A3							DRAWN BY	FUYUAN	CHECKED BY	COCO	MODEL NO: TPB02-205L3W-R
A2					X.XX	± 0.10	DATE	2019	APPROVAL B	ALEN	Https: www.rocpcu.tw
A1					X.X	± 0.15	ROCPCU TECHNOLOGY CO.,LTD				
					X	± 0.25					
REV	DATE	REVISION	DESCRIPTION	ISSUE	ANGULAR		Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basic of manufacture or sale of apparatus without permission				
					A	B	C	D	E	F	G