

FOR-1754 Rev.1.1

2

3

4

5

6


未注公差/General tolerances(mm)											
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315
3	6	10	18	30	50	80	120	180	250	315	400
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60
											±2.50
											0.1/10
											±2'

A

A


B

B

02P: Clasp is on the
left from this view

C

C

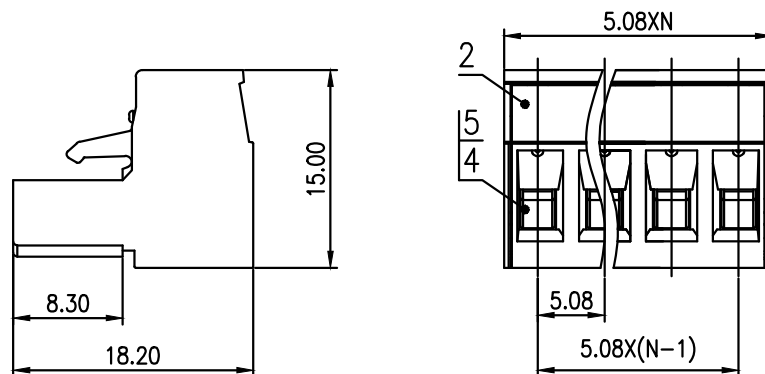

D

D

5	Clamp	Copper alloy	Sn plated
4	Cage	Copper alloy	M3/Ni plated
3	Screw	Steel	M3/Zn plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准 / UL Standard:		B	C
额定电压 / 电流 / Rated Voltage(V) / Current(A)		300/15	300/10
IEC 标准 / IEC Standard:			
过压类别 / Overvoltage Category / 污染等级 / Pollution Degree		III/2	
额定电压 / 电流 / Rated Voltage(V) / Current(A)		320/20	
额定脉冲电压(KV) / Rate Impulse Voltage(KV)		4.0	
螺丝扭矩 / Torque Tightening(N·m / Lb.in)		M3 0.5/4.43	
线径范围(硬线和软线) / Wire Range(rigid and flexible)(mm ² / AWG)		1.0~2.5/28~12	
间距 / Pitch(mm) / 线数范围 / Poles		5.08 / N=02~24P	
剥线长度 / Stripping length(mm)		7~8	
使用温度范围 / Operating temperature(°C)		-40~+105	
符合RoHS环保要求 / Conform to RoHS		Yes	
标准颜色编号 / Standard color number:		PANTONE / RAL	

MATERIAL:	SURFACE: /		
MAT NO.:	 拓宜 (上海) 工控电器设备有限公司		
STATUS:			
APPD:			
CHKD:	NAME: 2ETK-5.08-XXP-1Y-1000A(H)		
DRFT:	DRAWING NO.:		REV T0-1
SIZE: A4		TYPE: CUSTOMER_DRAWING	SCALE: 2:1 SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

1

2

3

4

5

6