

1 2 3 4 5 6 7 8 9

F


E

D


C

B




A

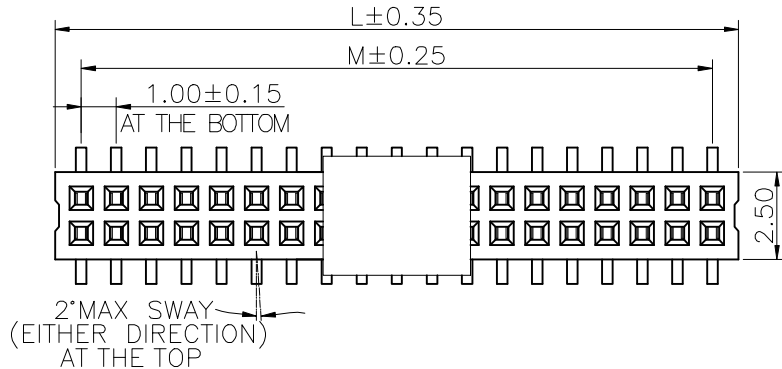

Recommended P.C.Board Layout  
(Tolerance:±0.05)



Specifications  
Current Rating:1.0Amp  
Insulation Resistance:1000MΩMin.  
Dielectric Withstanding Voltage:300VAC  
Contact Resistance:20mΩMax.  
Operating Temperature:-40°C to +105°C  
Materials  
Contact Material:Phosphor Bronze  
Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material  
All materials must meet Greenconn requirement for environment protection.

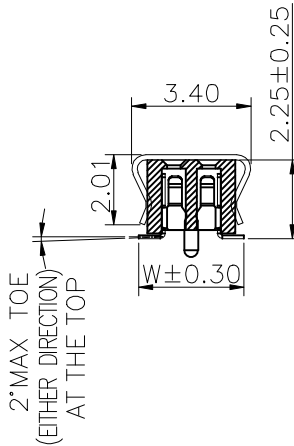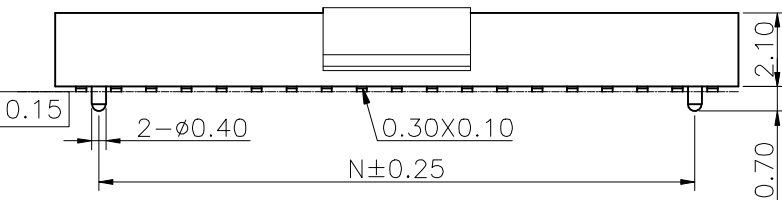

No. of PIN/ROW	Dimension Information		
	M	L	N
02	1.00	2.50	
03	2.00	3.50	1.00
04	3.00	4.50	2.00
05	4.00	5.50	3.00
06	5.00	6.50	4.00
07	6.00	7.50	5.00
08	7.00	8.50	6.00
09	8.00	9.50	7.00
10	9.00	10.50	8.00
11	10.00	11.50	9.00
12	11.00	12.50	10.00
13	12.00	13.50	11.00
14	13.00	14.50	12.00
15	14.00	15.50	13.00
16	15.00	16.50	14.00
17	16.00	17.50	15.00
18	17.00	18.50	16.00
19	18.00	19.50	17.00
20	19.00	20.50	18.00
21	20.00	21.50	19.00
22	21.00	22.50	20.00
23	22.00	23.50	21.00
24	23.00	24.50	22.00
25	24.00	25.50	23.00
26	25.00	26.50	24.00
27	26.00	27.50	25.00
28	27.00	28.50	26.00
29	28.00	29.50	27.00
30	29.00	30.50	28.00
31	30.00	31.50	29.00
32	31.00	32.50	30.00
33	32.00	33.50	31.00
34	33.00	34.50	32.00
35	34.00	35.50	33.00
36	35.00	36.50	34.00
37	36.00	37.50	35.00
38	37.00	38.50	36.00
39	38.00	39.50	37.00
40	39.00	40.50	38.00

Ordering Information

C SCC211 - XX XX B XXX C

Plastic specifications  
1=Single row  
2=Dual row  
3=Tripe row  
4=Quadruple

Water code  
No. of Pins per Row  
02~40

Positioning column information  
A=No locating post  
B=Round post  
C=Square post

Plating code  
01=Tin  
02=Gold Flash  
22=Matte Tin

Pin length  
See the drawing

Insulator Material  
C=LCP

Color  
1=Black  
2=White  
3=Yellow  
E=Beige

Contact Material  
A/S/K/T=Phosphor Bronze

Packing code  
C=Tube  
D=Tape&Reel  
E=Cap+Tube  
F=Cap+Tape&Reel  
G=Acetate Tape+Tube  
H=Acetate Tape+Tape&Reel

格稜股份有限公司  
Greenconn Corporation

GENERAL TOLERANCE	
X'±5.0'	X.±0.30
.X'±3.0'	.X±0.25
.XX'±2.0'	.XX±0.15
.XXX'±1.0'	.XXX±0.10

DESIGNED:	DATE:
CHECKED:	DATE:
CO SINGED:	DATE:
APPROVED:	DATE:

DWG. NO.  
CSCC211-CBXX

PART NO.  
CSCC211-XXXX BXXC1AX

TITLE.  
1.00 FEMALE HEADER  
DUAL ROWS SMT TYPE  
CONNECTOR

1 2 3 4 5 6 7 8 9

F

E

D

C

B

A