


0.65[0.026]±0.05



### Main Specifications

Climate grade:-30℃~ + 85℃

Rated values: Max50 mA12V DC

Min10 uA1V DC

Contact resistance:≤500mΩ


Dielectric strength: 100V,AC,1Min

Insulation resistance:≥100MΩ





Operating force: 260±50g

Travel: 0.16±0.05mm



Life: 100,000 times



### Circuit Diagram

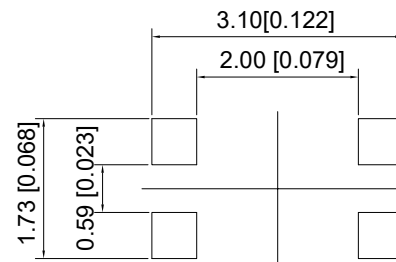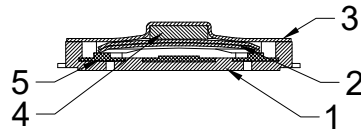

5	terminal	polyimide	1	Black
4	Key	Phosphor copper	1	Silver
3	Yellow membrane	polyimide	1	white
2	Shrapnel	SUS301-Ag0.5	2	Silver
1	base	PA6T	1	Black
ITEM	Name	Materials	NUM	COLOR

A4				 <b>ROCPCU</b>	COMMON TOLERANCE		UNIT	MM	PROJECTED		PRODUCT NAME:
A3							DRAWN BY	FUYUAN	CHECKED BY	COCO	MODEL NO: TPT-3C1
A2					X.XX	± 0.10	DATE	2019	APPROVAL B	ALEN	Https: www.rocpcu.tw
A1					X.X	± 0.15	<b>ROCPCU TECHNOLOGY CO.,LTD</b>				
REV	DATE	REVISION	DESCRIPTION	ISSUE	X	± 0.25					
					ANGULAR	—	Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basis of manufacture or sale of apparatus without permission				