
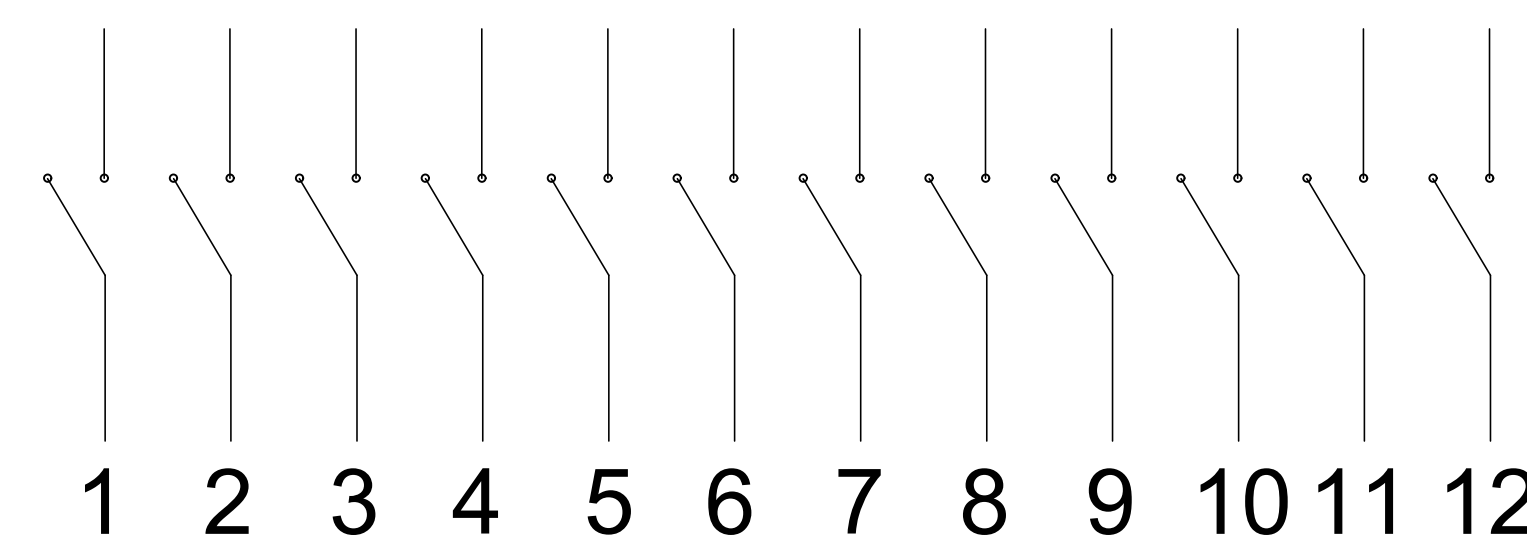
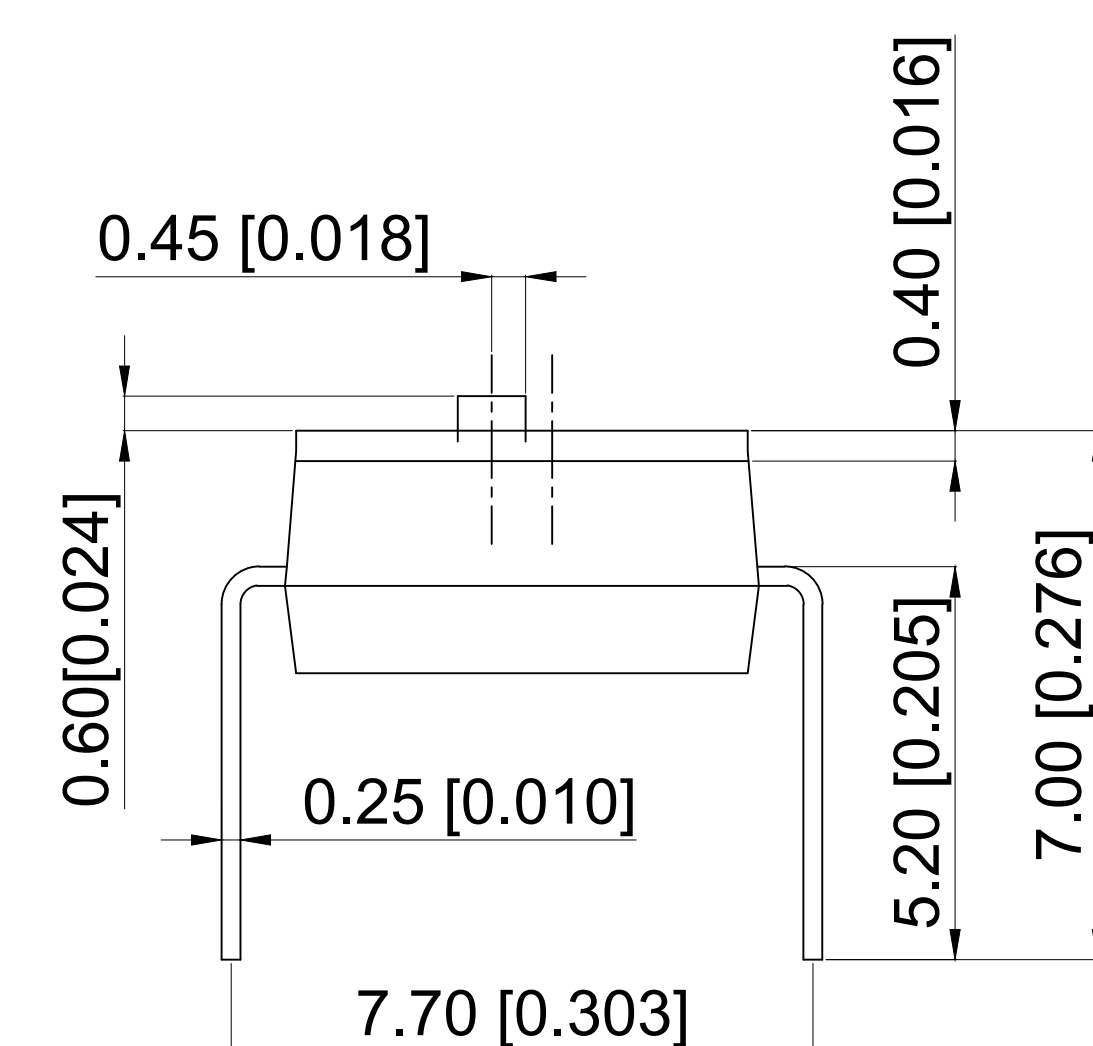
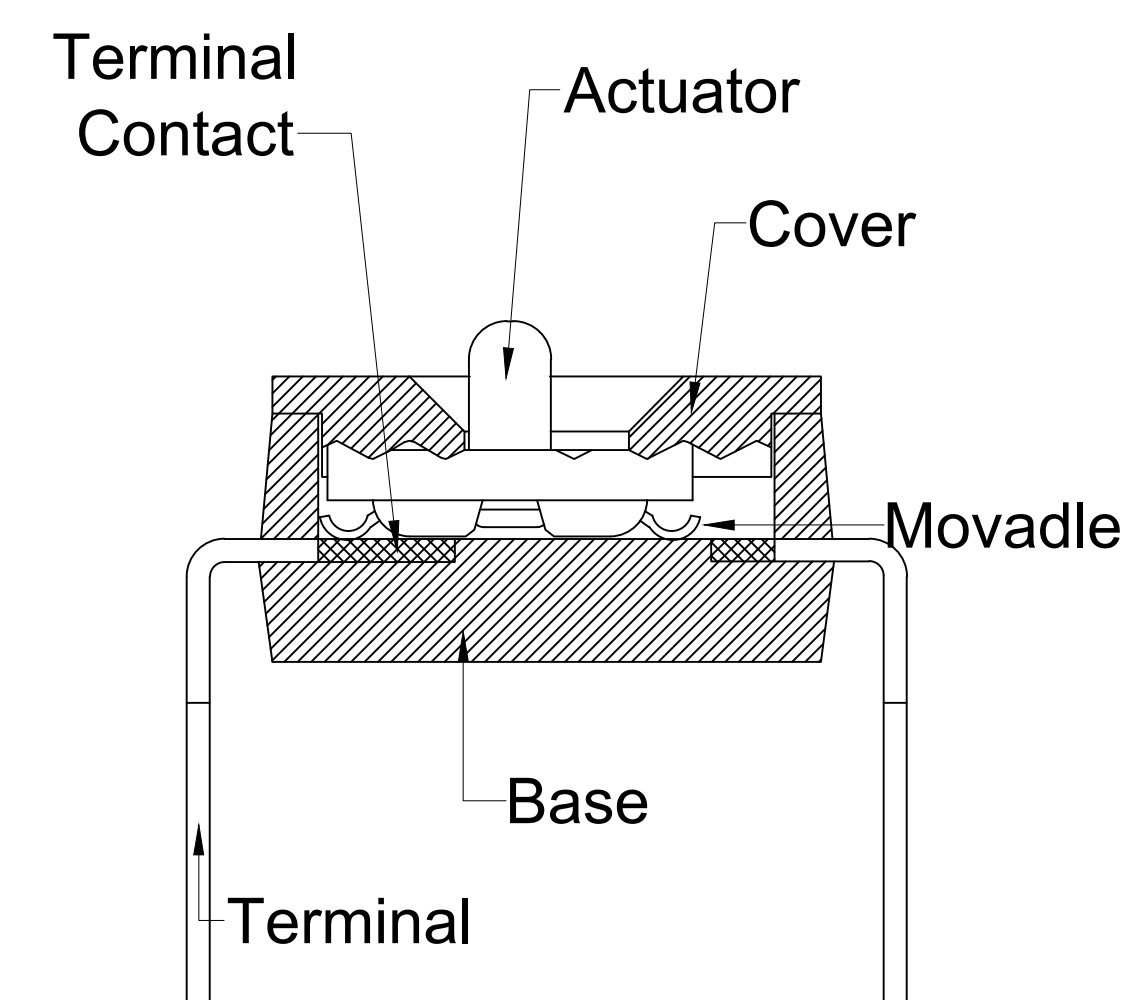
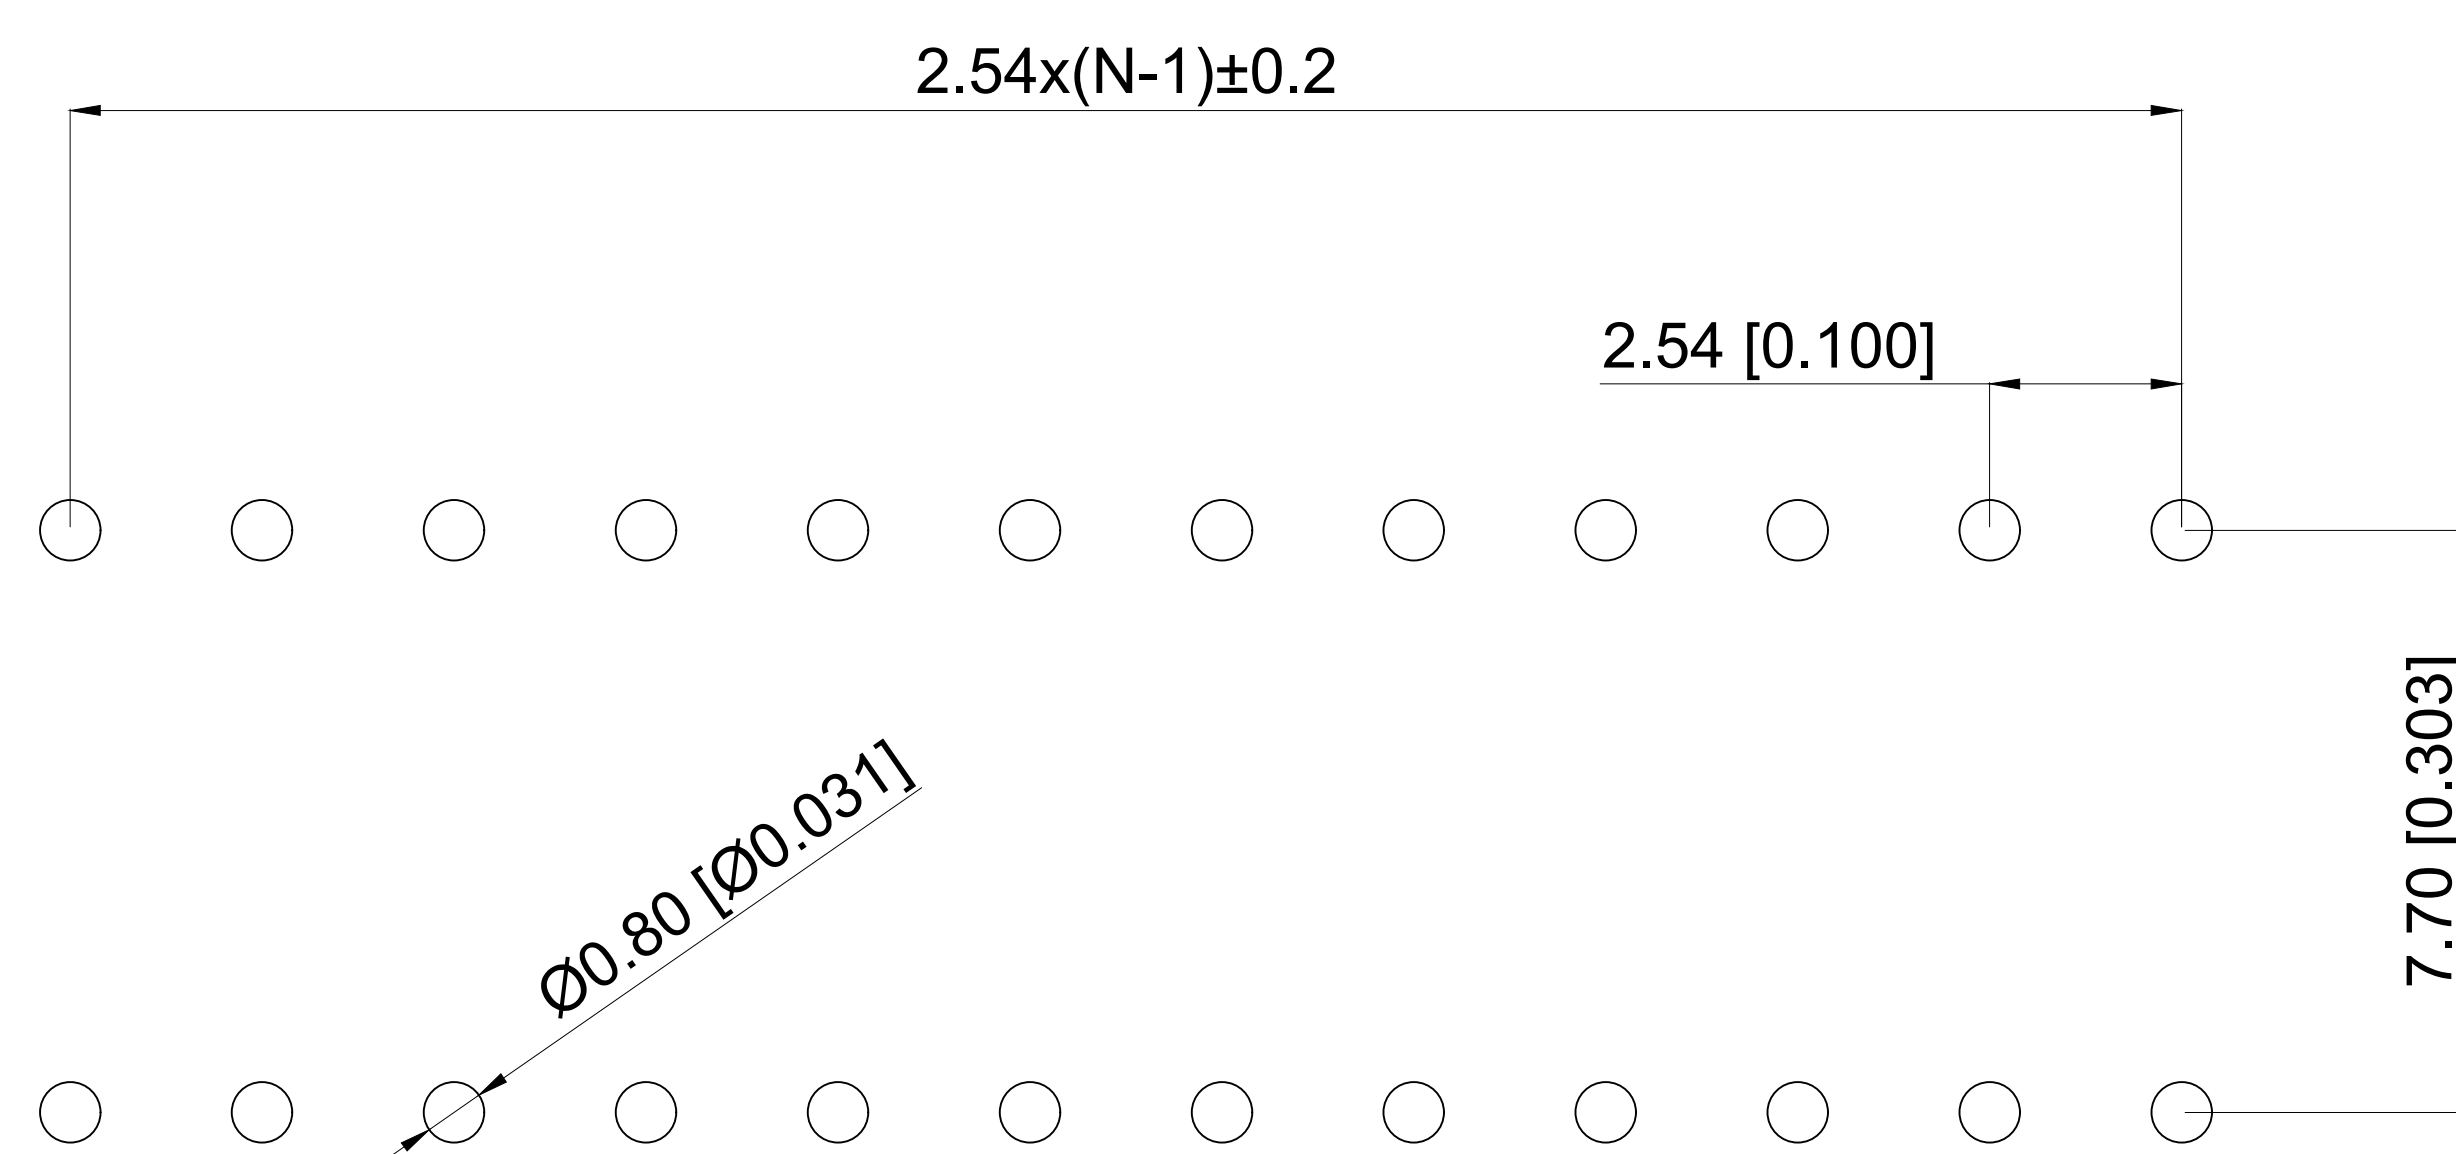
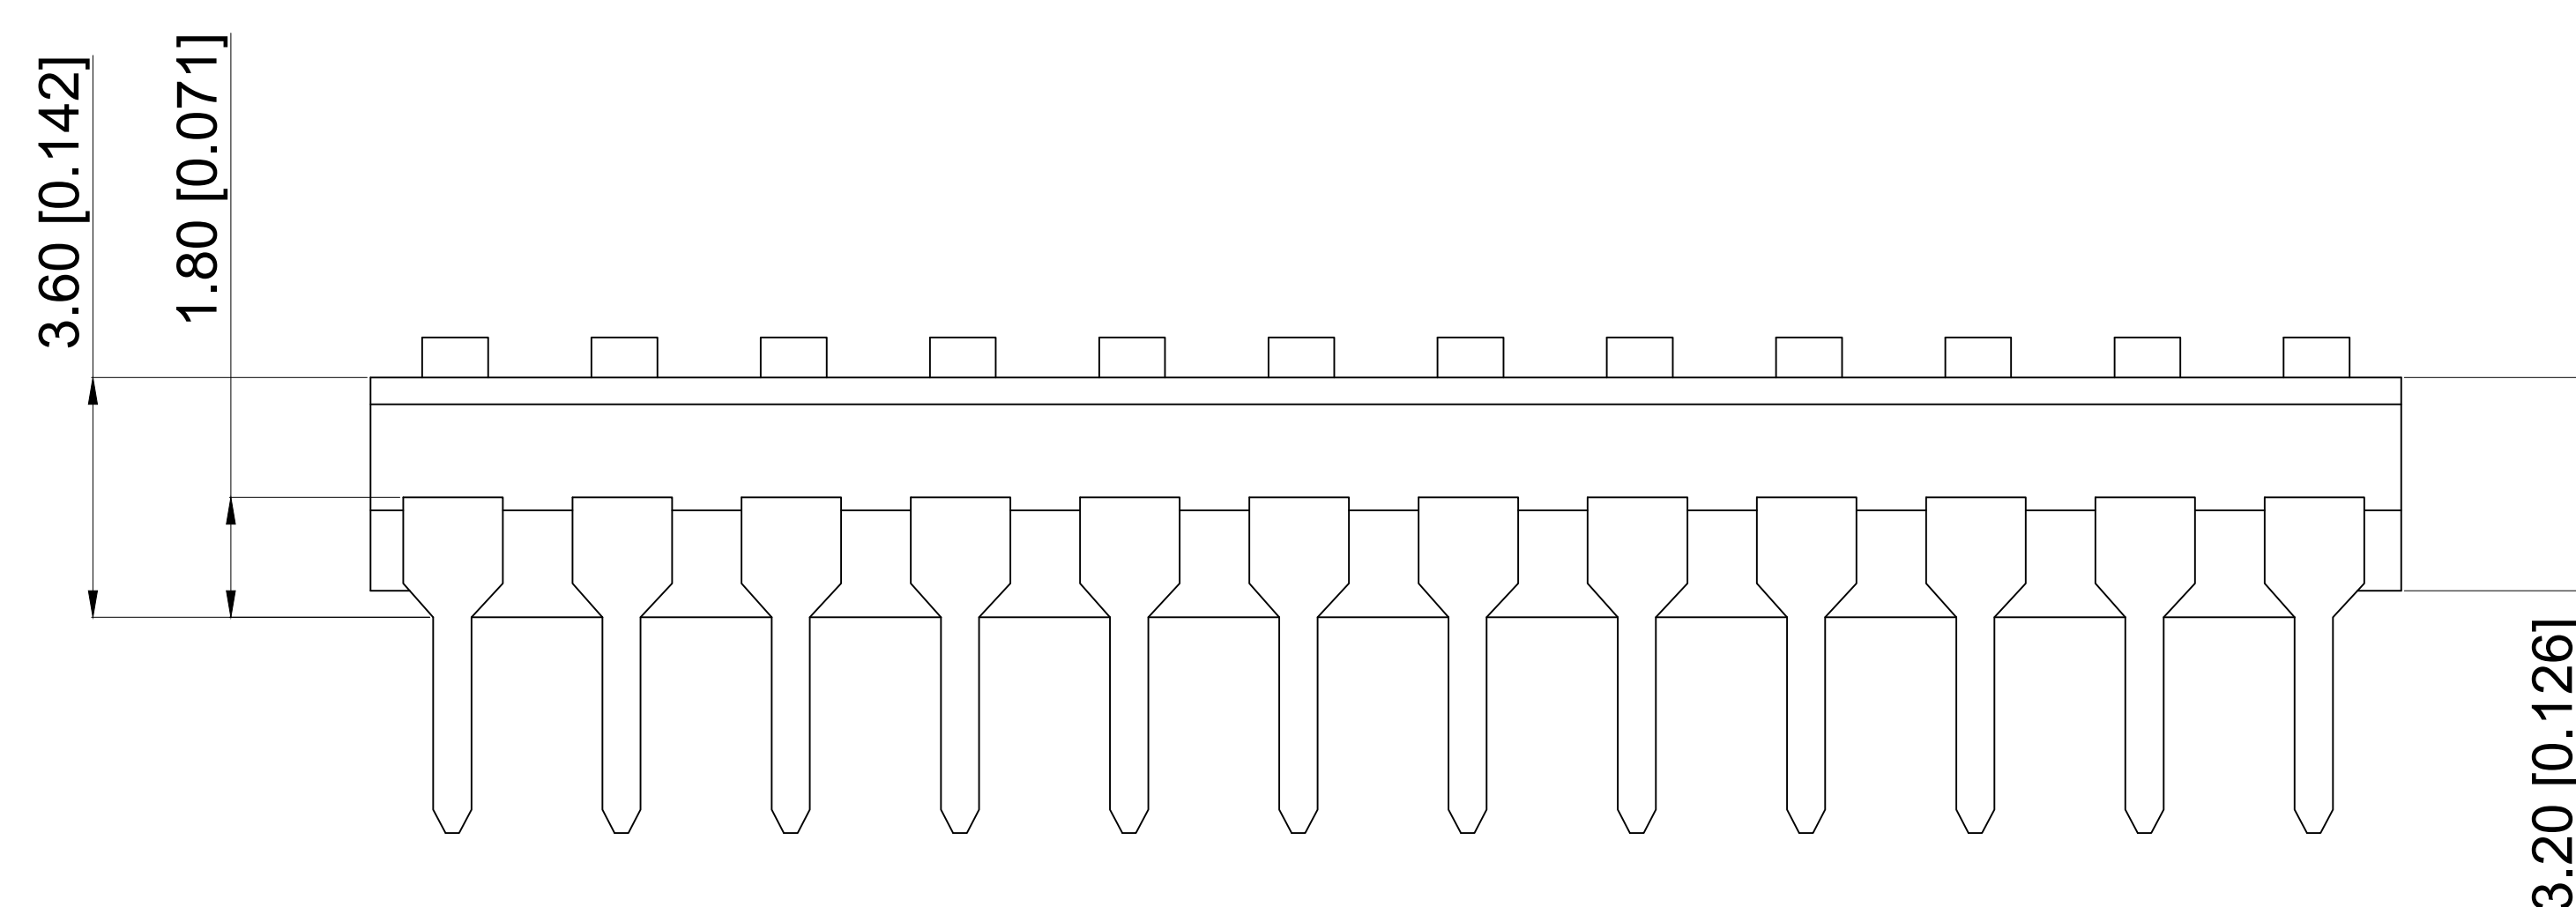


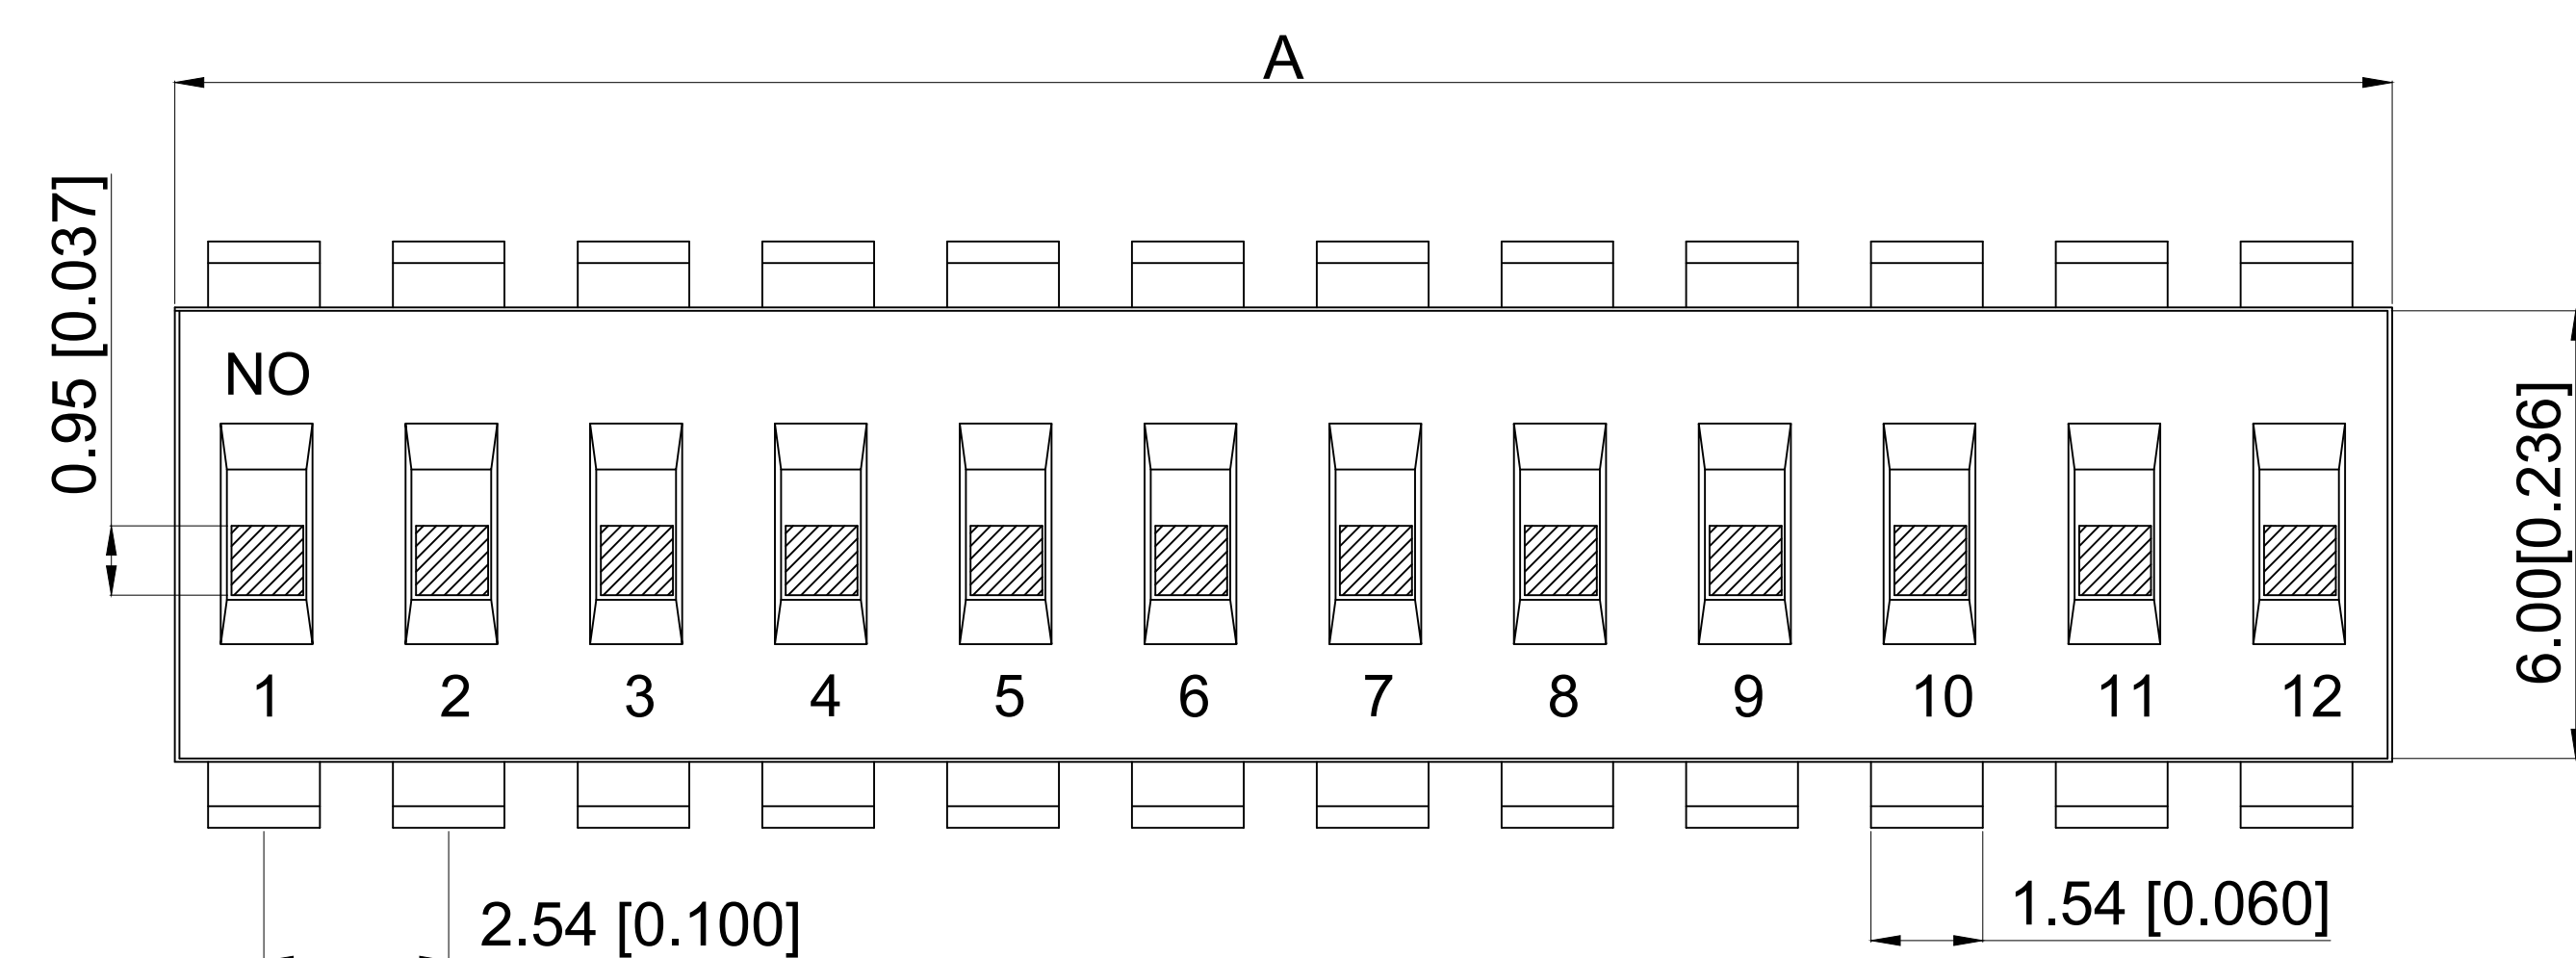


SCHEMATIC

Switching:25mA at 24VDC
Non-Switching:100mA at 50VDC
Initial:50m Ω Max
After life:100m Ω Max
Insulation Resistance:100m Ω Min,60 sec at 500VDC
Dielectric Strength:500VAC for 60seconds
Switch Capacitance:5pF Max at 1MHZ
Operation Temperature:-30°C to + 85°C
Storage Temperature:-40°C to + 85°C
Operation Force:500gf Max
Mechanical Life:3000 cycles operations
Resistance to Soldering:260 $\pm$ 5°C for 3-5 seconds

Poles(N)	A Dimension(mm)
01	2.54
02	5.08
03	7.62
04	10.16
05	12.70
06	15.24
07	17.78
08	20.32
09	22.86
10	25.40
12	30.48

Part Name	Material	Finished
Base	PPS UL94 VO	Black
Cover	PPS UL94 VO	Black
Actuator	Nylon UL94 VO	White
Movadle	Copper Alloy	Gold
Terminal Contact	Brass	Gold
Terminal	Brass	Gold/Tin

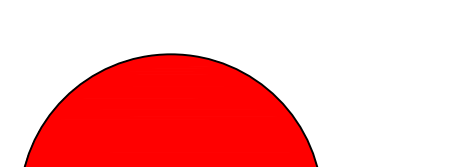A4				 台普 ROCPU	COMMON TOLERANCE		UNIT	MM	PROJCTED		PRODUCT NAME:
A3					X.XX	± 0.10	DRAWN BY	FUYUAN	CHECKED BY	COCO	MODEL NO: TAM108EZ
A2					X.X	± 0.15	DATE	2019	APPROVAL B	ALEN	Https: www.rocpu.tw
A1					X	± 0.25	ROCPU TECHNOLOGY CO.,LTD				
REV	DATE	REVISION	DESCRIPTION		ISSUE	ANGULAR					
		A			B	C		D	E	F	G