




向视图



FREE



PUSH

Technical parameter

技术参数

1. Rated current: 100mA 30V DC
2. Contact resistance: $\leq 200m\ \Omega$
3. Operating force: $260gf \pm 50gf$
4. Maximum stroke: $2.3 \pm 0.2mm$
5. Operating temperature: $-40^{\circ}C \sim +80^{\circ}C$
6. Insulation resistance: $\geq 100M\ \Omega$
7. Electric strength: AC250v 50Hz 1Min
8. Service life: 10000 times
9. Switch similar: Self locking

5. Operating temperature: $-40^{\circ}C \sim +80^{\circ}C$

5. 工作温度: $-40^{\circ}C \sim +80^{\circ}C$

6. Insulation resistance: $\geq 100M\ \Omega$

6. 绝缘电阻: $\geq 100M\ \Omega$

7. Electric strength: AC250v 50Hz 1Min




7. 抗电强度: AC250v 50Hz 1Min

8. Service life: 10000 times

8. 寿命: 10000次

9. Switch similar: Self locking

9. 开关类似: 自锁

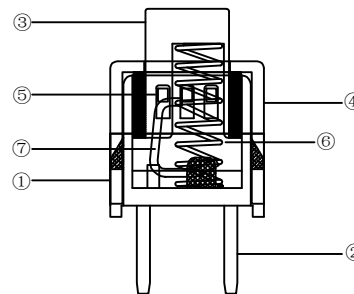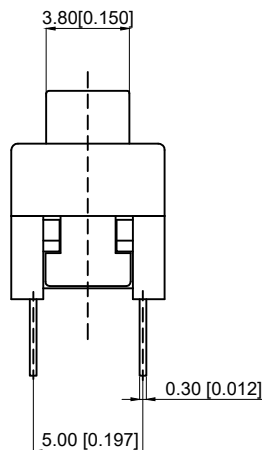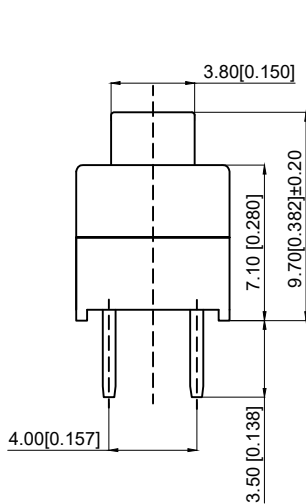

7	crochet hook 钩针	SUS 不锈钢丝	1	Natural color 本色
6	Spring 弹簧	SUS 不锈钢丝	1	Natural color 本色
5	reed 簧片	Composite silver 复合银	1	Natural color 本色
4	Upper cover 上盖	PA66 尼龙66	1	transparent 透明
3	handle 按柄	PA66 尼龙66	1	blue 蓝色
2	terminal 端子	Brass 黄铜	1	Natural color/silver 本色/镀银
1	Pedestal 基座	PA66 尼龙66	1	black 黑色
ITEM	Name	Materials	NUM	COLOR

A4				
A3				
A2				
A1				
REV	DATE	REVISION	DESCRIPTION	ISSUE



COMMON TOLERANCE

X.XX	± 0.10
X.X	± 0.15
X	± 0.25

ANGULAR

UNIT	MM	PROJECTED		PRODUCT NAME:
DRAWN BY	FUYUAN	CHECKED BY	COCO	MODEL NO: BTSA-L-P-11
DATE	2019	APPROVAL B	ALEN	Https: www.rocpu.tw
ROCPCU TECHNOLOGY CO.,LTD				
<small>Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basic of manufacture or sale of apparatus without permission</small>				