

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES1:

UL Standard

- 1.Rated Voltage/Current : 150V / 4A
- 2.Withstanding Voltage : AC1300V/1Min.
- 3.Wire Range : 26~20AWG

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	250V
Rate Current(A)	5A



2.Wire Range : 0.2~0.5mm²

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 2.50mm, Poles : N=2~12P
- 3.Stripping length : 8.0mm
- 4.Operating temperature: -40°C~+105°C
- 5.Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm			
TO	Over	TO	Over	TO	Over
6	6 TO 10	24	30 TO 60	100 TO 150	150
±0.15	±0.20	±0.30	±0.50	±1.00	±1.30
					±2'

6.RoHS Compliance

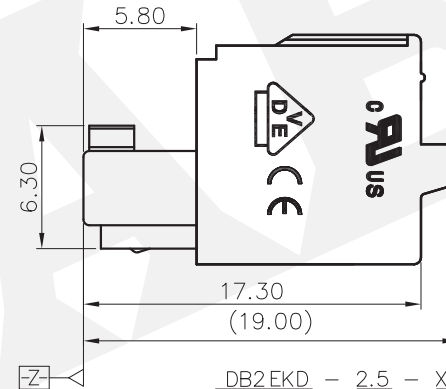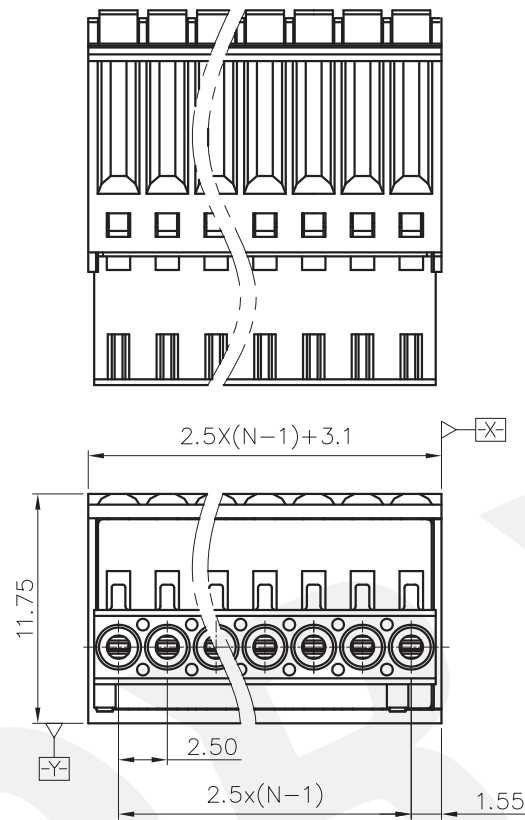

DB2EKD - 2.5 - XXP - 1Y - 00A (H)

(Series No.) (Pitch) (Poles) (Single Pitch) (Color): 1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

(RoHS)
00A-(Standard)

02P

DETACHED LISTS	PART NO.: /	DORABO 慈溪市地博电子有限公司 CIXI DORABO ELECTRONICS CO.,LTD			
	APPD: /	NAME: DB2EKD-2.5-XXP-1Y-00A(H)			
	CHKD: /	TITLE: CUSTOMER DRAWING			
	DRFT: /	REV DO			
THIRD ANGLE PROJECTION		DRAWING NO.: /		SHEET 1/1	
		MM (INCH)		SCALE 1:1	
		DO NOT SCALE DRAWING			