

HEIDI-D

~10° diffused spot beam

TECHNICAL SPECIFICATIONS:

Dimensions	Ø 21.6 mm
Height	11.9 mm
Fastening	tape, pin
ROHS compliant	yes ⓘ




MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour	Finish
HEIDI-D	Single lens	PMMA	clear	
HEIDI-TAPE	Tape	Acrylic foam	black	

ORDERING INFORMATION:

Component		Qty in box	MOQ	MPQ	Box weight (kg)
CA11264_HEIDI-D	Single lens	3264	204	204	10.6
» Box size: 480 x 280 x 300 mm					

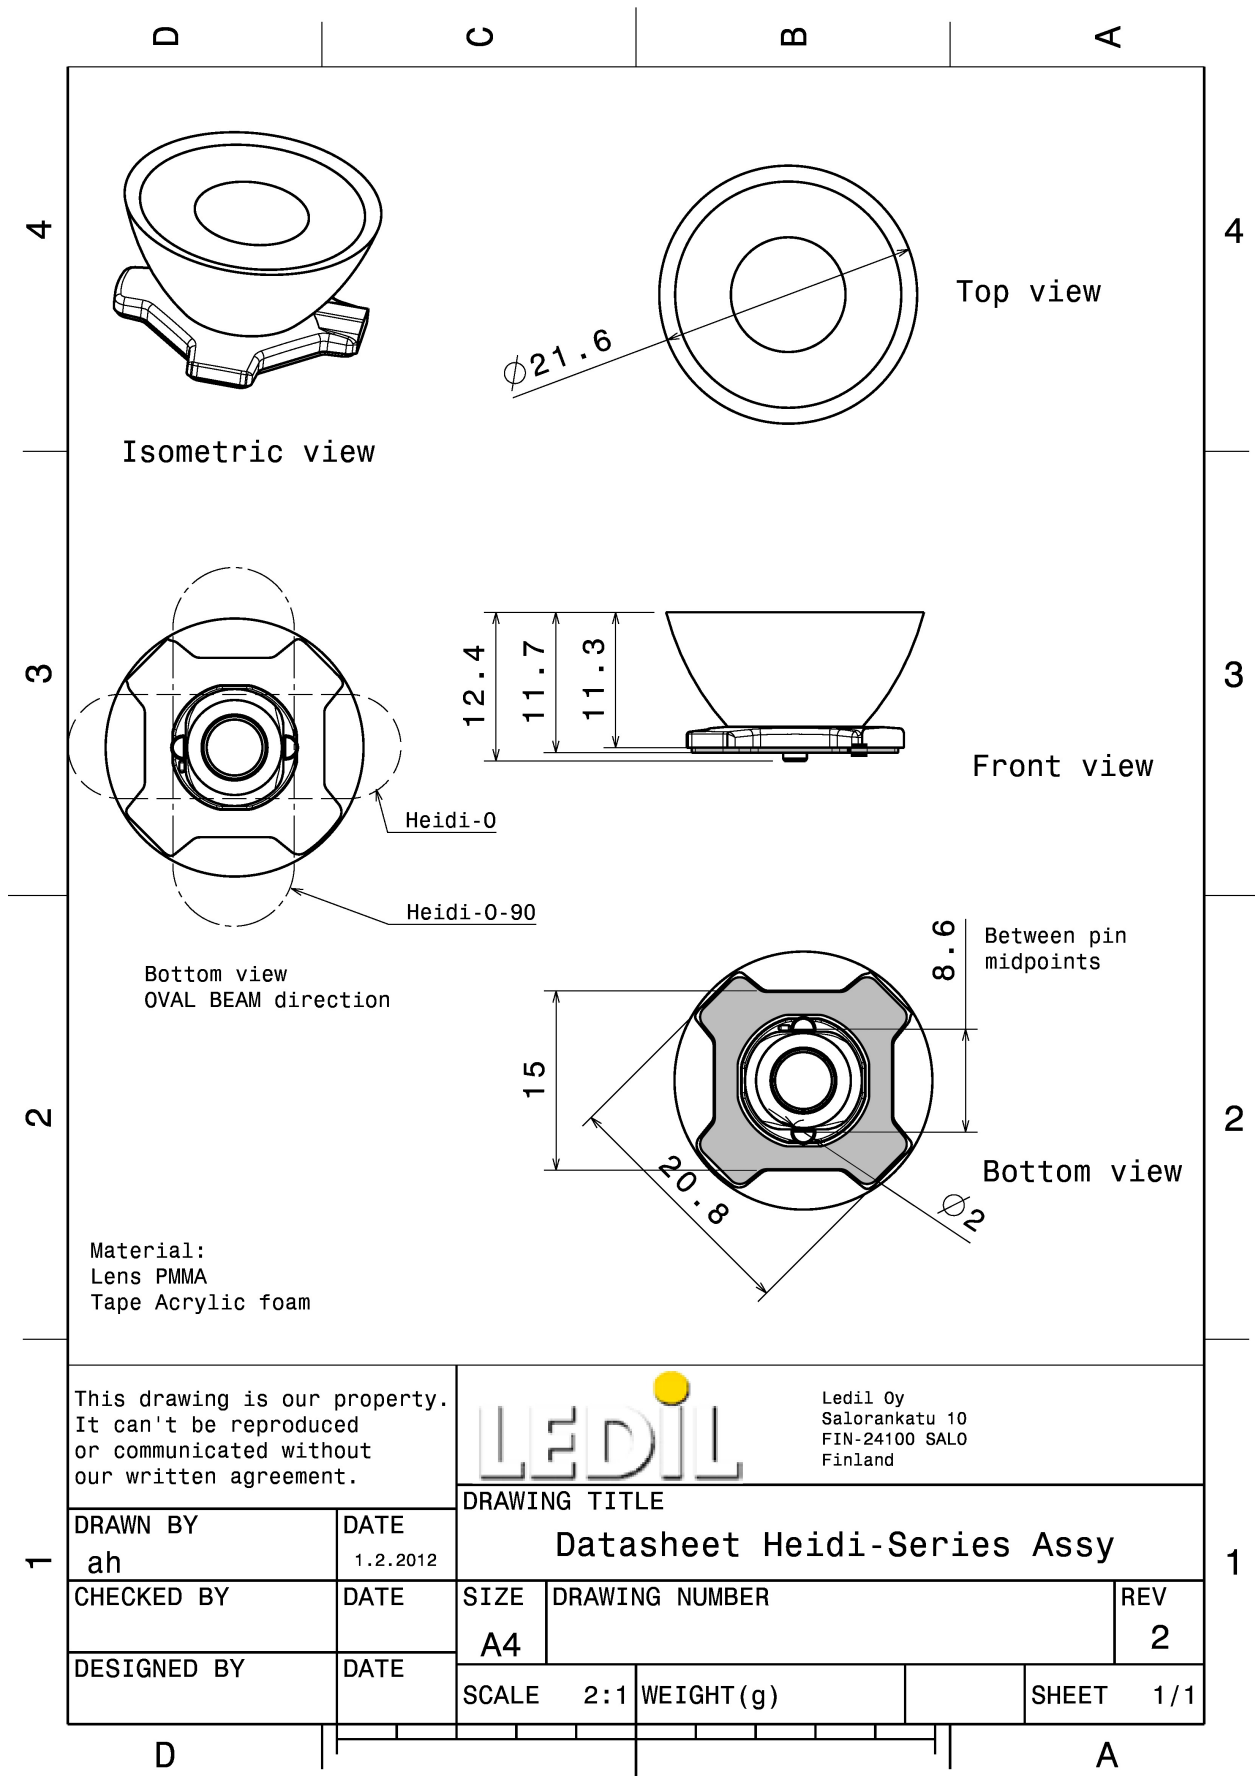

See also our general installation guide: www.ledil.com/installation_guide

PHOTOMETRIC DATA (MEASURED):

CREE → LED

LED XB-D
 FWHM / FWTM 10.0° / 22.0°
 Efficiency 90 %
 Peak intensity 12.6 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:


CREE → LED

LED XB-H
 FWHM / FWTM 11.0° / 25.0°
 Efficiency 87 %
 Peak intensity 12.7 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:



CREE → LED


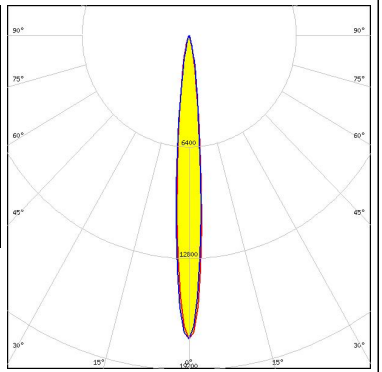
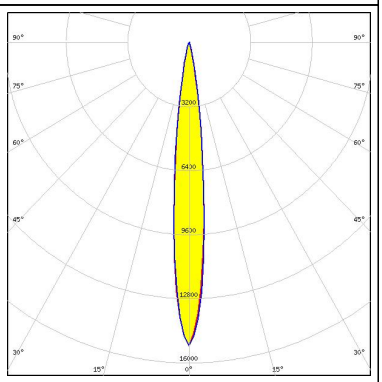

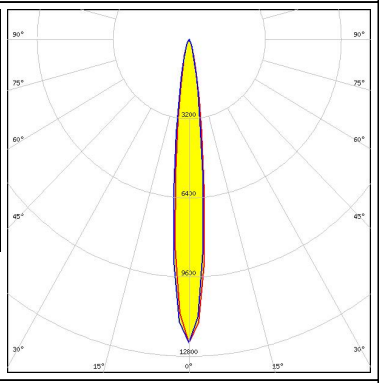

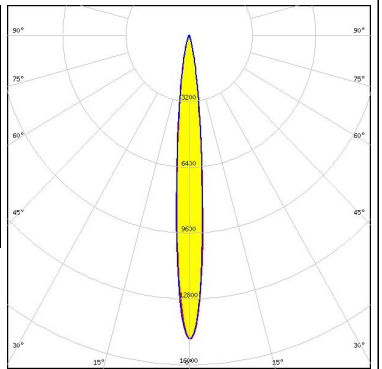
LED XD16
 FWHM / FWTM 10.0° / 22.0°
 Efficiency 93 %
 Peak intensity 14.1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

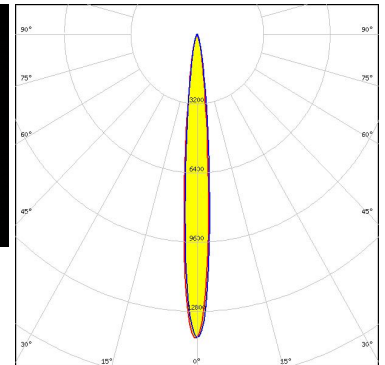


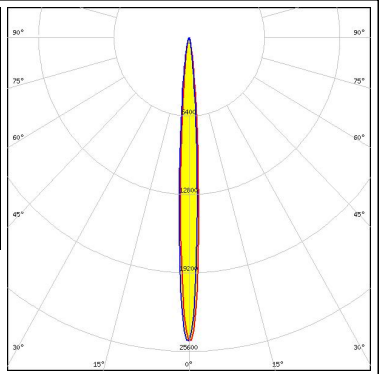

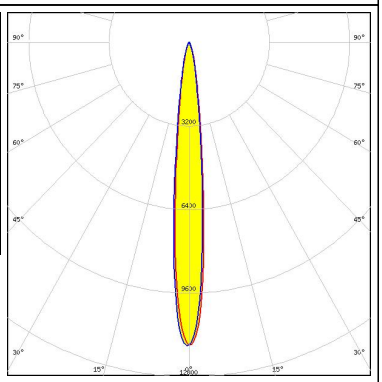

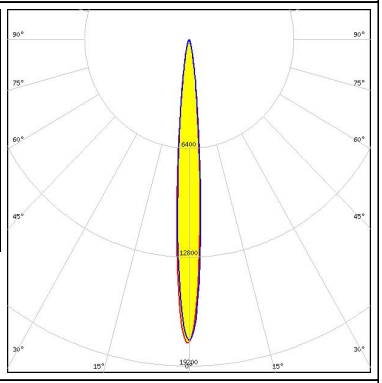

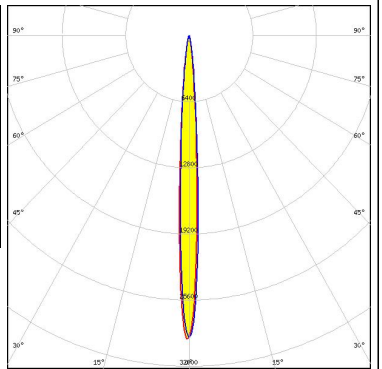
CREE → LED

LED XP-E
 FWHM / FWTM 9.0° / 18.0°
 Efficiency 93 %
 Peak intensity 22 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

PHOTOMETRIC DATA (MEASURED):

<p>CREE → LED</p> <p>LED XP-E2 FWHM / FWTM 10.0° / 23.0° Efficiency 88 % Peak intensity 17.4 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>CREE → LED</p> <p>LED XP-G FWHM / FWTM 12.0° / 23.0° Efficiency 93 % Peak intensity 14.5 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>CREE → LED</p> <p>LED XP-G2 FWHM / FWTM 11.0° / 24.0° Efficiency 88 % Peak intensity 15 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>CREE → LED</p> <p>LED XQ-E HD FWHM / FWTM 10.0° / 24.0° Efficiency 94 % Peak intensity 14.8 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		


PHOTOMETRIC DATA (MEASURED):

<p>CREE → LED</p> <p>LED XQ-E HI FWHM / FWTM 7.0° / 17.0° Efficiency 93 % Peak intensity 24.8 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>CREE → LED</p> <p>LED XT-E FWHM / FWTM 11.0° / 26.0° Efficiency 94 % Peak intensity 11.6 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>LUMILEDS</p> <p>LED LUXEON C FWHM / FWTM 9.0° / 21.0° Efficiency 89 % Peak intensity 17.8 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>LUMILEDS</p> <p>LED LUXEON CZ FWHM / FWTM 7.0° / 16.0° Efficiency 94 % Peak intensity 29 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		

PHOTOMETRIC DATA (MEASURED):



LUMILEDS

LED LUXEON T
FWHM / FWTM 12.0° / 25.0°
Efficiency 89 %
Peak intensity 11.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:

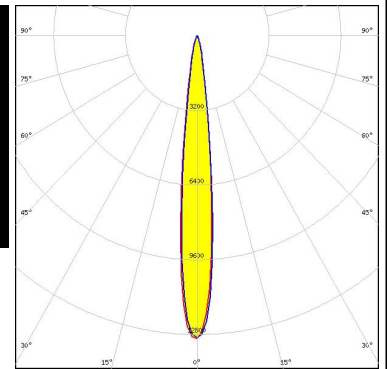

LUMILEDS

LED LUXEON TX
FWHM / FWTM 12.0° / 25.0°
Efficiency 88 %
Peak intensity 13.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:

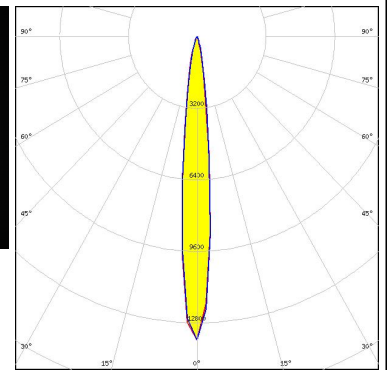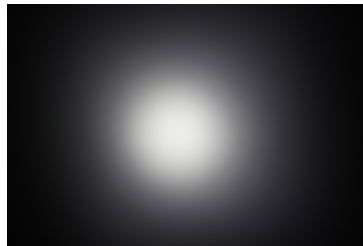


NICHIA

LED NCSxx19A
FWHM / FWTM 9.0° / 23.0°
Efficiency 88 %
Peak intensity 11.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:



NICHIA

LED NCSxx19B
FWHM / FWTM 11.0° / 25.0°
Efficiency 85 %
Peak intensity 14.2 cd/lm
LEDs/each optic 1
Light colour White
Required components:

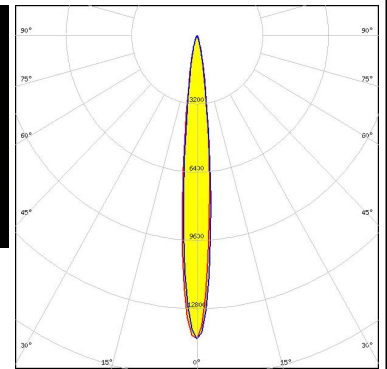


PHOTOMETRIC DATA (MEASURED):



LED NVSxx19A
FWHM / FWTM 12.0° / 29.0°
Efficiency 88 %
Peak intensity 8.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:



LED NVSxx19B/NVSxx19C
FWHM / FWTM 14.0° / 30.0°
Efficiency 91 %
Peak intensity 10 cd/lm
LEDs/each optic 1
Light colour White
Required components:

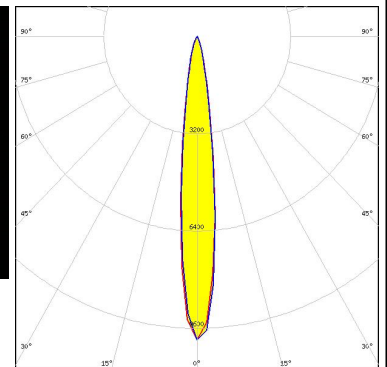

Osram Opto Semiconductors

LED OSLON Square EC
FWHM / FWTM 10.0° / 22.0°
Efficiency 90 %
Peak intensity 12.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:



Osram Opto Semiconductors

LED OSLON SSL 150
FWHM / FWTM 9.0° / 22.0°
Efficiency 92 %
Peak intensity 15 cd/lm
LEDs/each optic 1
Light colour White
Required components:

PHOTOMETRIC DATA (MEASURED):


OSRAM

Opto Semiconductors

LED OSLOM SSL 80
 FWHM / FWTM 7.0° / 19.0°
 Efficiency 89 %
 Peak intensity 19.3 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:


SAMSUNG

LED LH181A
 FWHM / FWTM 10.0° / 26.0°
 Efficiency 88 %
 Peak intensity 10 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

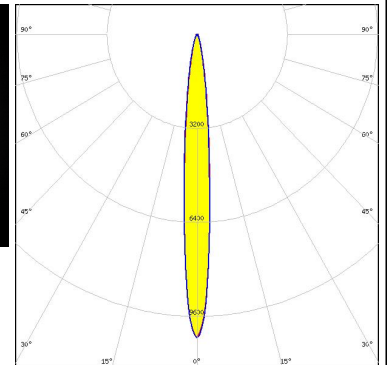



SAMSUNG

LED LH181B
 FWHM / FWTM 11.0° / 25.0°
 Efficiency 94 %
 Peak intensity 11.8 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

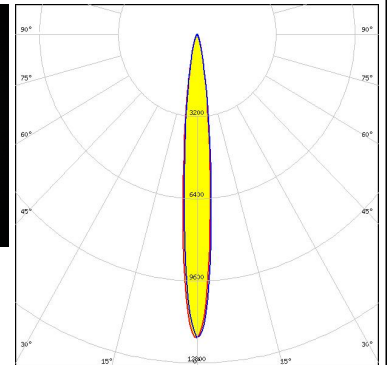

SAMSUNG


LED LH351B
 FWHM / FWTM 14.0° / 29.0°
 Efficiency 88 %
 Peak intensity 10 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

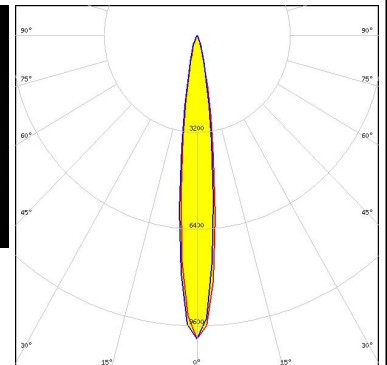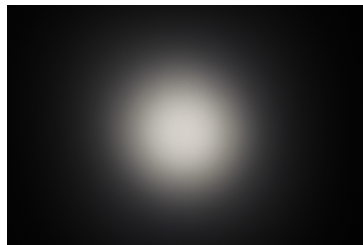

PHOTOMETRIC DATA (MEASURED):

SAMSUNG

LED LH351Z
FWHM / FWTM 12.0° / 26.0°
Efficiency 88 %
Peak intensity 13.3 cd/lm
LEDs/each optic 1
Light colour White
Required components:

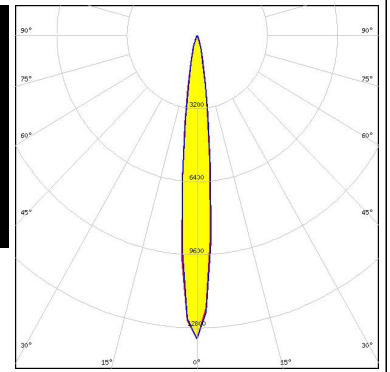


SEOUL SEMICONDUCTOR

LED Z5
FWHM / FWTM 8.0° / 20.0°
Efficiency 87 %
Peak intensity 22.3 cd/lm
LEDs/each optic 1
Light colour White
Required components:


PHOTOMETRIC DATA (SIMULATED):




LED XP-E2
 FWHM / FWTM 10.0° / 20.0°
 Efficiency 96 %
 Peak intensity 22.6 cd/lm
 LEDs/each optic 1
 Light colour Green
 Required components:

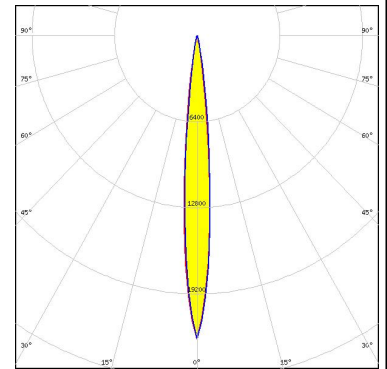


LED XP-L HI
 FWHM / FWTM 12.0° / 22.0°
 Efficiency 96 %
 Peak intensity 15.9 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

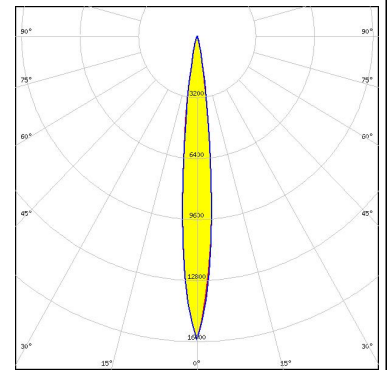

LED LUXEON 3030 HV
 FWHM / FWTM 11.0° / 23.0°
 Efficiency 94 %
 Peak intensity 16.4 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

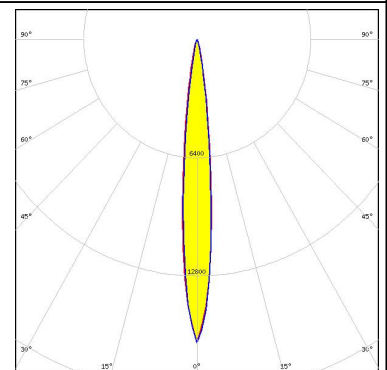

LED LUXEON Rubix
 FWHM / FWTM 8.0° / 18.0°
 Efficiency 95 %
 Peak intensity 30.6 cd/lm
 LEDs/each optic 1
 Light colour Red
 Required components:

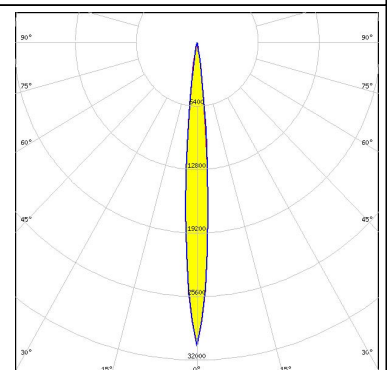




PHOTOMETRIC DATA (SIMULATED):

<p>LUMILEDS</p> <p>LED LUXEON SunPlus 20 Line (120 deg)</p> <p>FWHM / FWTM 8.0° / 18.0°</p> <p>Efficiency 96 %</p> <p>Peak intensity 26.7 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	
<p>LUMILEDS</p> <p>LED LUXEON SunPlus 20 Line (150 deg)</p> <p>FWHM / FWTM 8.0° / 18.0°</p> <p>Efficiency 91 %</p> <p>Peak intensity 24.9 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	
<p>LUMILEDS</p> <p>LED LUXEON Z</p> <p>FWHM / FWTM 9.0° / 17.0°</p> <p>Efficiency 94 %</p> <p>Peak intensity 32.4 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	
<p>LUMILEDS</p> <p>LED LUXEON Z ES</p> <p>FWHM / FWTM 7.7° / 16.0°</p> <p>Efficiency 94 %</p> <p>Peak intensity 33.5 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	

PHOTOMETRIC DATA (SIMULATED):

<p>NICHIA</p> <p>LED NCSxE17A FWHM / FWTM 22.0° / 42.0° Efficiency 93 % Peak intensity 4.1 cd/lm LEDs/each optic 4 Light colour White Required components:</p>	
<p>OSRAM Opto Semiconductors</p> <p>LED Duris S5 (Single chip) FWHM / FWTM 12.0° / 24.0° Efficiency 96 % Peak intensity 14.2 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	
<p>OSRAM Opto Semiconductors</p> <p>LED OSCONIQ P 3030 FWHM / FWTM 9.4° / 20.0° Efficiency 97 % Peak intensity 23.1 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	
<p>OSRAM Opto Semiconductors</p> <p>LED OSLOM Square CSSRM2/CSSRM3 FWHM / FWTM 13.0° / 26.0° Efficiency 94 % Peak intensity 13.3 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	

PHOTOMETRIC DATA (SIMULATED):
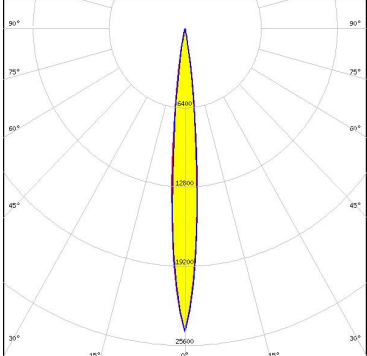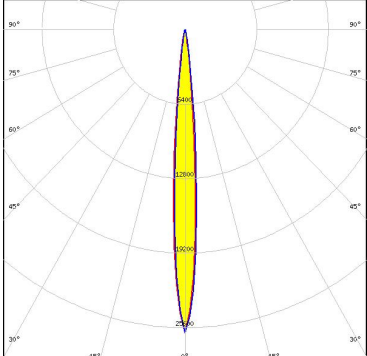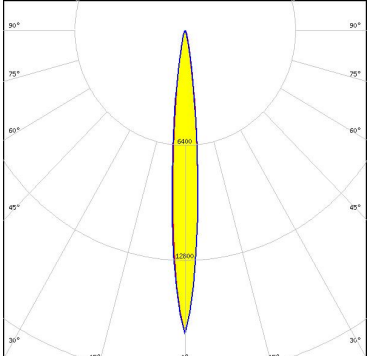
<p>OSRAM Opto Semiconductors</p> <p>LED: OSLON SSL 150</p> <p>FWHM / FWTM: 10.0° / 19.0°</p> <p>Efficiency: 95 %</p> <p>Peak intensity: 24.5 cd/lm</p> <p>LEDs/each optic: 1</p> <p>Light colour: Red</p> <p>Required components:</p>	
<p>OSRAM Opto Semiconductors</p> <p>LED: SFH 4170S</p> <p>FWHM / FWTM: 9.0° / 17.0°</p> <p>Efficiency: 88 %</p> <p>LEDs/each optic: 1</p> <p>Light colour: IR</p> <p>Required components:</p>	
<p>SEOUL SEMICONDUCTOR</p> <p>LED: Z5M1/Z5M2</p> <p>FWHM / FWTM: 10.0° / 22.0°</p> <p>Efficiency: 90 %</p> <p>Peak intensity: 17 cd/lm</p> <p>LEDs/each optic: 1</p> <p>Light colour: White</p> <p>Required components:</p>	

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)