


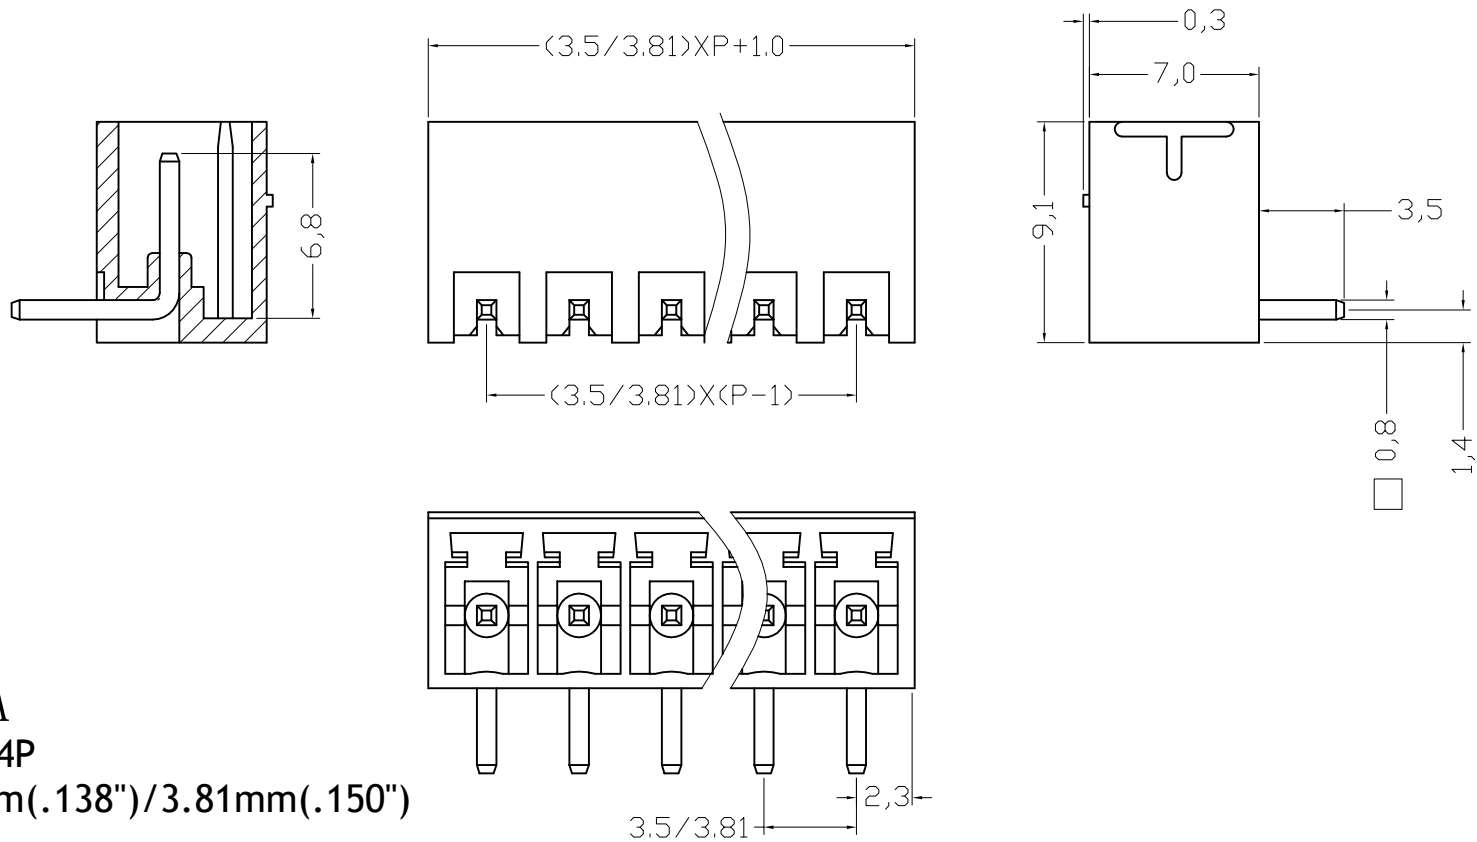

300V 8A
Poles: 2P-24P
Pitch: 3.5mm(.138")/3.81mm(.150")

Materials
Housing: PA66(UL 94V-O)
Solder Pin: Brass, Tin Plated.

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
 新莱亚电子 XINLAIYA ELECTRONIC CO., LTD	图名/Title	文件编号/File No.	页序/Sheet	x. ±0.2 x.' ±2°	
				.x ±0.1 .x' ±1°	
				.xx ±0.05 .xx' ±0.5°	
				.xxx ±0.01	
备注/Remark		单位/Units: mm			

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date
-----------	--------------------	--------------	---------