

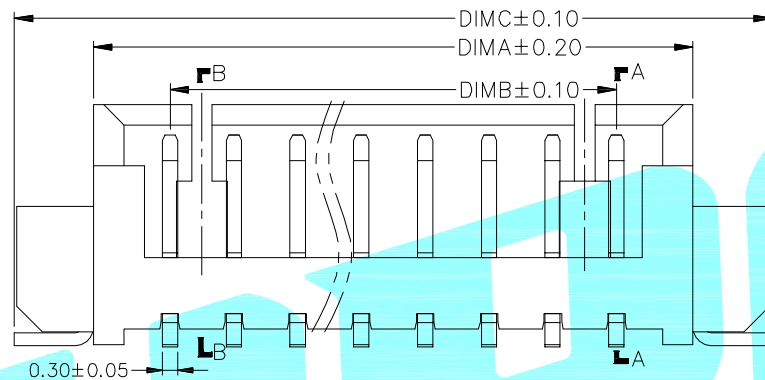
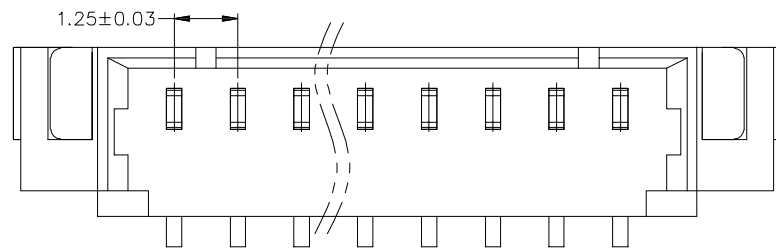


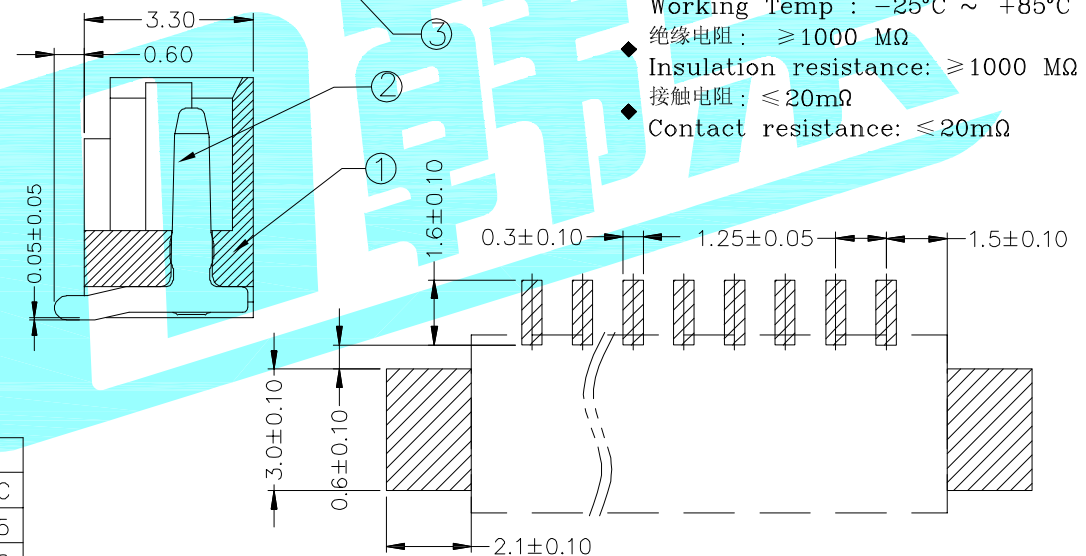

No. of Contacts	DIMENSIONS		
	DIM A	DIM B	DIM C
2P	4.25	1.25	7.55
3P	5.50	2.50	8.80
4P	6.75	3.75	10.05
5P	8.00	5.00	11.30
6P	9.25	6.25	12.55
7P	10.50	7.50	13.80
8P	11.75	8.75	15.05
9P	13.00	10.00	16.30

No. of Contacts	DIMENSIONS		
	DIM A	DIM B	DIM C
10P	14.25	11.25	17.55
11P	15.50	12.50	18.80
12P	16.75	13.75	20.05
13P	18.00	15.00	21.30
14P	19.25	16.25	22.55
15P	20.50	17.50	23.80
16P	21.75	18.75	25.05

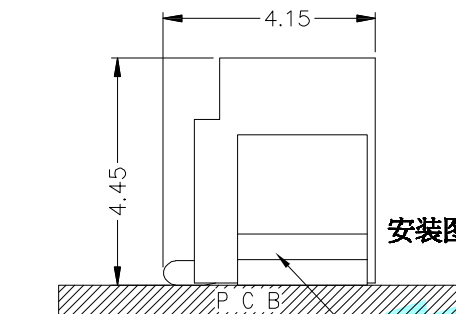

■ 技术参数 SPECIFICATIONS

- ◆ 适用线规: AWG#28~#32
- ◆ Applicable Wire: AWG#28~#32
- ◆ 额定电压: 125V DC,AC(rms)
- ◆ Rated voltage: 125V DC,AC(rms)
- ◆ 额定电流: 1A
- ◆ Rated Current: 1A
- ◆ 耐压值: 500V AC/minute
- ◆ Withstand voltage: 500V AC/min.
- ◆ 工作温度: -25°C ~ +85°C
- ◆ Working Temp: -25°C ~ +85°C
- ◆ 绝缘电阻: ≥1000 MΩ
- ◆ Insulation resistance: ≥1000 MΩ
- ◆ 接触电阻: ≤20mΩ
- ◆ Contact resistance: ≤20mΩ

PCB Layout

③	Solder Tab	—	2	Phosphor bronz	Ag-PLATED	—
②	PIN	—	—	Phosphor bronz	Ag-PLATED	—
①	Base	—	1	PA46	—	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS			DATE		HRO 航路 ELECTRONICS CO.,LTD		
DRAWN	JIANKUN.LU		2015.03.17				
CHECKED				TITLE:		Bar Connector Series	
APPROVALS				PART NO.		1.25T-nP-WV	
TOLERANCES ARE	30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 	
	10~30	±0.20					
	5~10	±0.15					
	~ 5	±0.10					
			±2°	DRAWING NO.	_____	SHEET 1 OF 1	

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			