

# Sensor/actuator cable - SAC-3P-M12MS/0,6-PUR/CI-1L-Z



1400781

<https://www.phoenixcontact.com/us/products/1400781>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Sensor/actuator cable, 3-position, PUR halogen-free, black-gray RAL 7021, Plug straight M12, coding: A, on Valve connector CI (9.4 mm), with 1 LED, connected with Z diode, connected with Z diode, cable length: 0.6 m

## Commercial Data

Item number	1400781
Packing unit	1 pc
Minimum order quantity	50 pc
Note	Made to Order (non-returnable)
Sales Key	B06
Product Key	BF1DOA
GTIN	4046356510899
Weight per Piece (including packing)	41.5 g
Weight per Piece (excluding packing)	41.5 g
Customs tariff number	85444290
Country of origin	PL

# Sensor/actuator cable - SAC-3P-M12MS/0,6-PUR/CI-1L-Z



1400781

<https://www.phoenixcontact.com/us/products/1400781>

## Technical Data

### Product properties

Product type	Sensor/actuator cable with valve connector
Number of positions	3
No. of cable outlets	1
Coding	A - standard

### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

### Material specifications

Flammability rating according to UL 94	HB
Sealing material	TPU (Seal molded)
Material housing valve plug	TPU
Material of grip body	TPU
Contact material	CuSn
Contact surface material	Ni/Au
Contact carrier material	TPU GF
Contact material	CuSn
Valve plug contact insert material	PA 6.6
Contact surface material	Sn
Cable gland material	Zinc die-cast, nickel-plated

### Electrical properties

Contact resistance	$\leq 5 \text{ m}\Omega$
Insulation resistance	$\geq 100 \text{ M}\Omega$
Nominal voltage $U_N$	24 V AC
	24 V DC
Nominal current $I_N$	4 A
Protective circuit	Z diode

### LED signaling

Status display	1 LED
Status display present	yes

### Connector

Insertion/withdrawal cycles	$\geq 100$
-----------------------------	------------

### Connection 1

Head design	Plug
Head cable outlet	straight
Head thread type	M12
Coding	A

# Sensor/actuator cable - SAC-3P-M12MS/0,6-PUR/CI-1L-Z



1400781

<https://www.phoenixcontact.com/us/products/1400781>

## Connection 2

Head design	Valve connector
Head thread type	CI (9.4 mm)
Status indicator head	1 LED

## Cable / line

Cable length	0.6 m
--------------	-------

### PUR halogen-free black [PUR]

Cable weight	30 kg/km
UL AWM Style	20549
Number of positions	3
Shielded	no
Cable type	PUR halogen-free black [PUR]
Conductor structure signal line	28x 0.15 mm
AWG signal line	20
Conductor cross section	3x 0.5 mm <sup>2</sup>
Wire diameter incl. insulation	1.5 mm ±0.05 mm (Signal line)
External cable diameter	4.5 mm ±0.2 mm
Outer sheath, material	PUR
External sheath, color	black-gray RAL 7021
Conductor material	Bare Cu litz wires
Material wire insulation	PP
Single wire, color	black 1, black 2, green/yellow
Overall twist	3 wires, twisted
Max. conductor resistance	39 Ω/km (at 20 °C)
Insulation resistance	min. 20 MΩ*km
Nominal voltage, cable	≤ 300 V
Test voltage	≥ 1200 V
Minimum bending radius, fixed installation	5 x D
Minimum bending radius, flexible installation	10 x D
Smallest bending radius, fixed installation	22.5 mm
Max. bending cycles	15000000
Halogen-free	in accordance with DIN VDE 0472 part 815
Flame resistance	according to DIN VDE 0482 According to DIN EN 50265-2-1
Resistance to oil	in accordance with DIN EN 60811-2-1
Other resistance	largely oil-resistant partly UV-resistant in accordance with DIN EN ISO 4892-2-A
Ambient temperature (operation)	-40 °C ... 80 °C (cable, fixed installation) -20 °C ... 80 °C (Cable, flexible installation)

## Ambient conditions

Degree of protection	IP65
----------------------	------

# Sensor/actuator cable - SAC-3P-M12MS/0,6-PUR/CI-1L-Z



1400781

<https://www.phoenixcontact.com/us/products/1400781>

	IP67
Ambient temperature (operation)	-25 °C ... 90 °C (Plug / socket)
	-20 °C ... 85 °C (valve plug)

## Standards and regulations

### M12

Standards/specifications	IEC 61076-2-101
--------------------------	-----------------

### Valve connector

Standards/specifications	EN 175301-803
--------------------------	---------------


# Sensor/actuator cable - SAC-3P-M12MS/0,6-PUR/CI-1L-Z

1400781

<https://www.phoenixcontact.com/us/products/1400781>

## Drawings

Schematic diagram

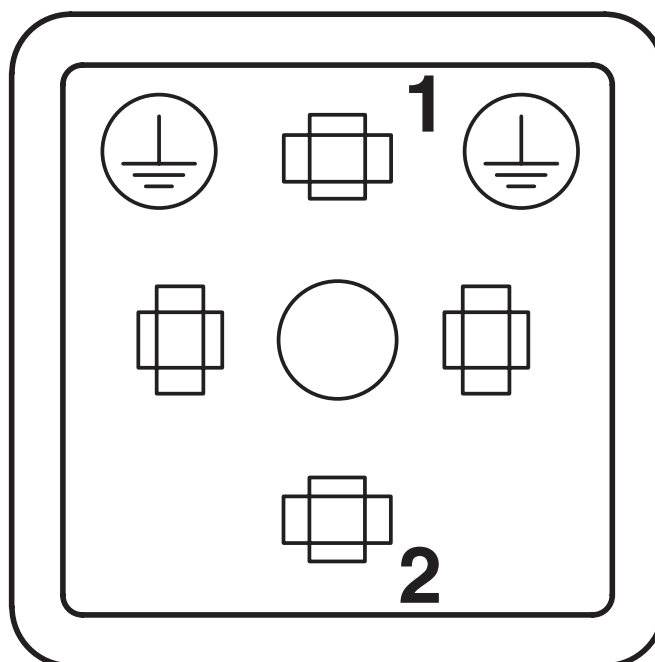


# Sensor/actuator cable - SAC-3P-M12MS/0,6-PUR/CI-1L-Z



1400781

<https://www.phoenixcontact.com/us/products/1400781>

## Approvals

 <b>CSAus</b> Approval ID: 13631	Nominal Voltage $U_N$	Nominal Current $I_N$	Cross Section AWG	Cross Section $\text{mm}^2$
	24 V	4 A	-	-

# Sensor/actuator cable - SAC-3P-M12MS/0,6-PUR/CI-1L-Z



1400781

<https://www.phoenixcontact.com/us/products/1400781>

## Classifications

### ECLASS

ECLASS-9.0	27060311
ECLASS-10.0.1	27060311
ECLASS-11.0	27060311

### ETIM

ETIM 8.0	EC001855
----------	----------

### UNSPSC

UNSPSC 21.0	26121600
-------------	----------

# Sensor/actuator cable - SAC-3P-M12MS/0,6-PUR/CI-1L-Z



1400781

<https://www.phoenixcontact.com/us/products/1400781>

## Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50 years For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"
------------	--



# Sensor/actuator cable - SAC-3P-M12MS/0,6-PUR/CI-1L-Z



1400781

<https://www.phoenixcontact.com/us/products/1400781>

## Accessories

### Screw

Screw - SAC-V-SCREW-M3-29 KNURL - 1403779

<https://www.phoenixcontact.com/us/products/1403779>

Fillister head screw with plastic knurl, M3 x 40



---

Phoenix Contact 2022 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)