

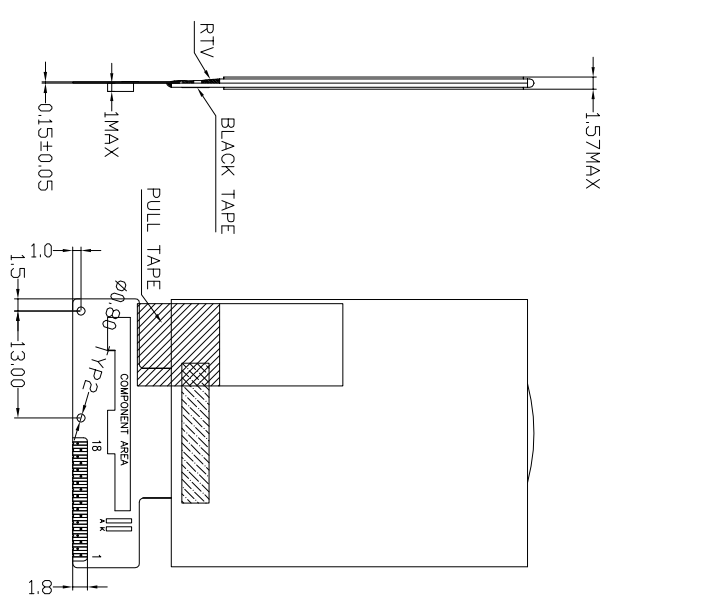


THE DRAWING ON THIS PRINT AND INFORMATION THEREON ARE PROPRIETARY TO VARRITRONIX AND SHALL NOT BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS WITHOUT WRITTEN PERMISSION OF VARRITRONIX.

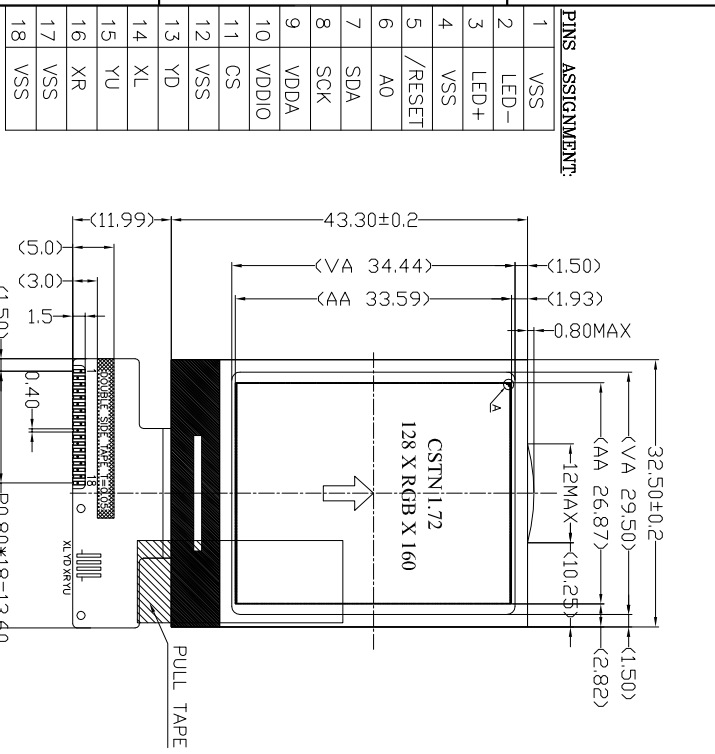

DETAIL A  
 (DOT SIZE FOR CUSTOMER REFERENCE ONLY)

DISPLAY TYPE	CSTN,65K
DISPLAY RESOLUTION	128 X RGB X 160
VIEWING ANGLE	6.0° CLOCK
MUX RATIO & BIAS	- - -
LCD CONTROLLER/DRIVER	UC1698V
LOGIC VOLTAGE	-2.8V
OPERATING TEMPERATURE	-20°C TO +70°C
STORAGE TEMPERATURE	-30°C TO +80°C

NOTES:  
 1. ◊ : SPECIAL CHARACTERISTIC  
 2. + : SAFETY CHARACTERISTIC  
 3. \* : CRITICAL DIMENSION  
 4. (.) : REFERENCE DIMENSION

ISSUE	AMENDMENT	DATE

TITLE: LCM Module Specification		PROJECT NO.: COG-C172MWHC-04	
CUSTOMER REF: IN		FINISH: N/A	
TOLERANCE UNLESS OTHERWISE SPECIFIED: X.X ±0.3		ANGULAR: ±1°	
DIMENSIONS IN MM		SCALE: 100 NOT ON SCALE	
MATERIAL: N/A		OVERALL THK: N/A	
THIRD ANGLE PROJECTION			
DRAWN:	RAIN PAN	SIGN	DATE
CHECKED:	ZHONG GLAM		09.06.26
APPROVED:	ZHANG REDSUN		
ITEM NO.: COG-C172MWHC-04			
DESCRIPTION: COG-C172MWHC-04			
FILE NO.: COG-C172MWHC-04.DWG REV: 0			
SHEET 1 OF 1			



1 2 3 4 5 6