
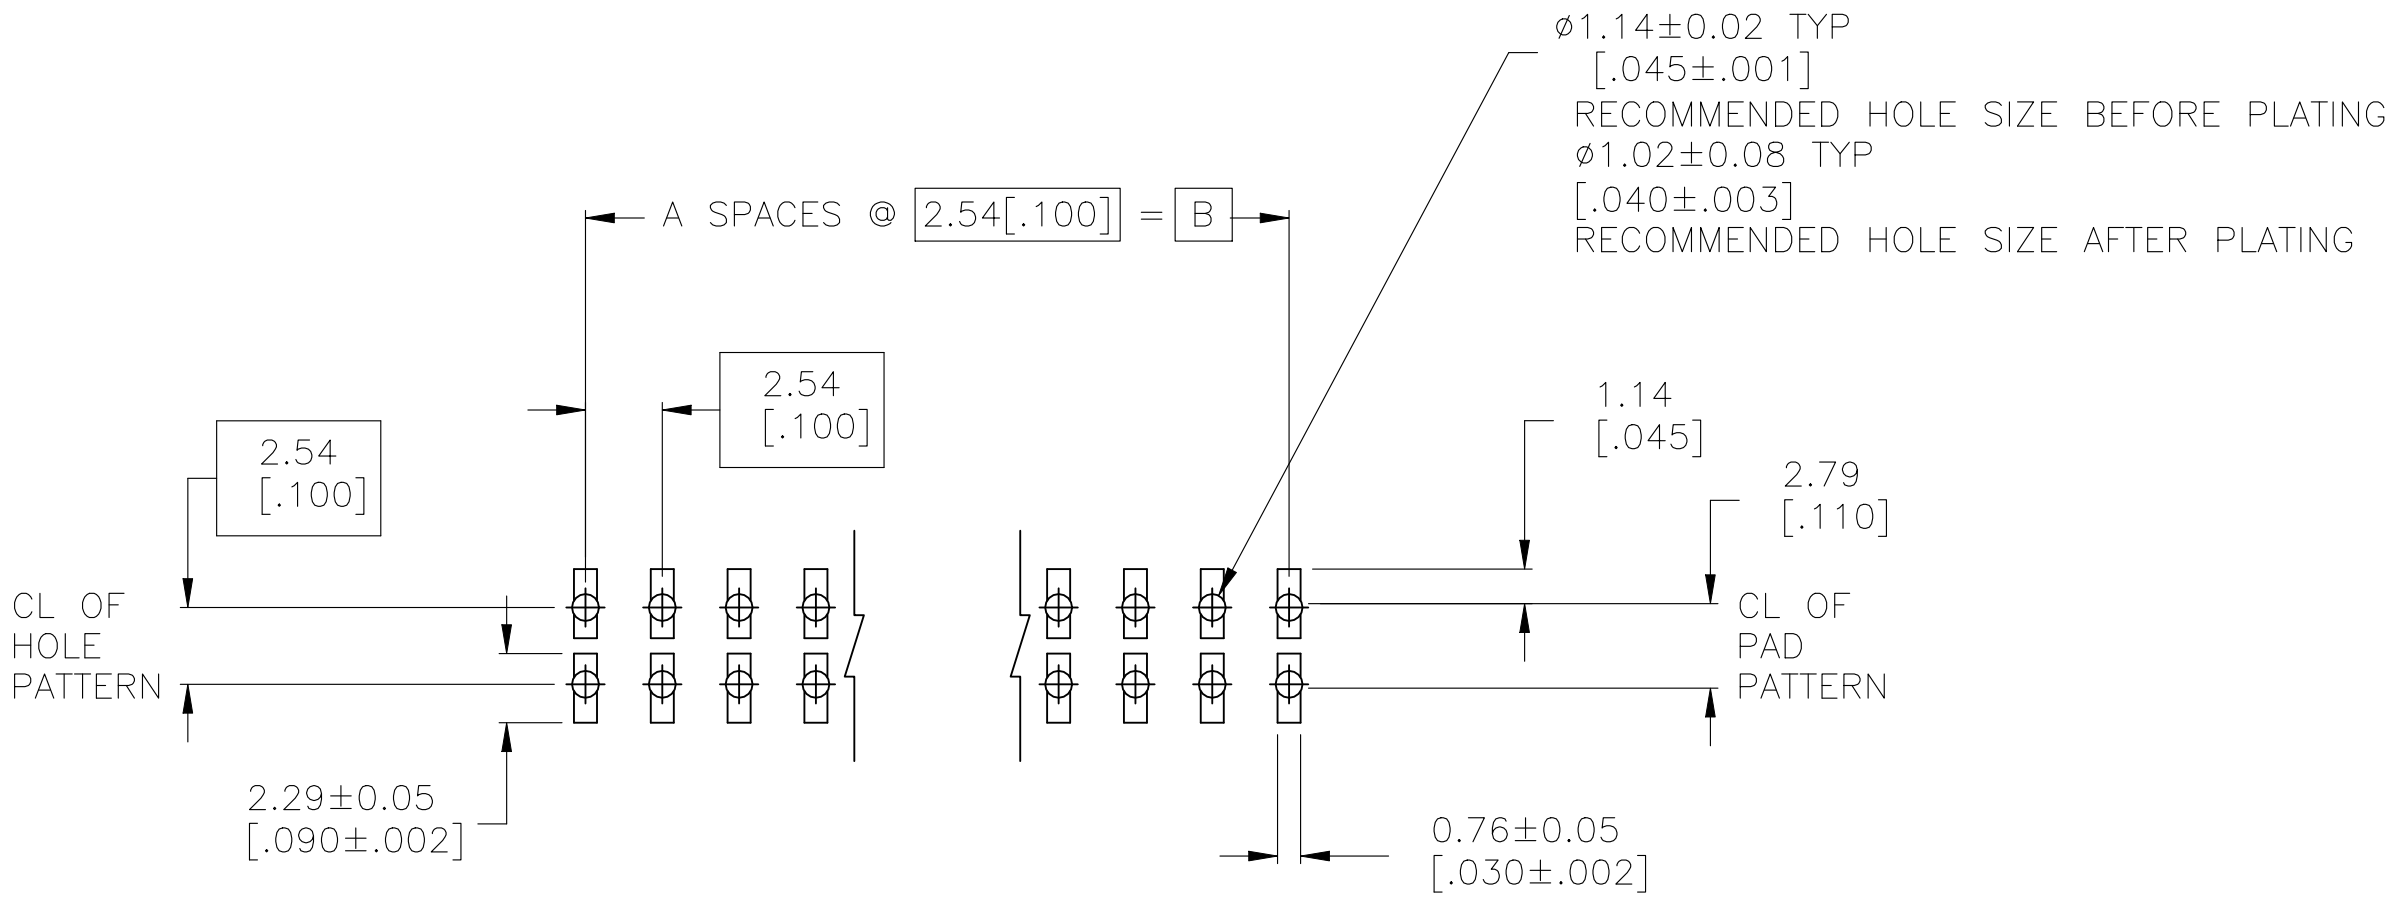
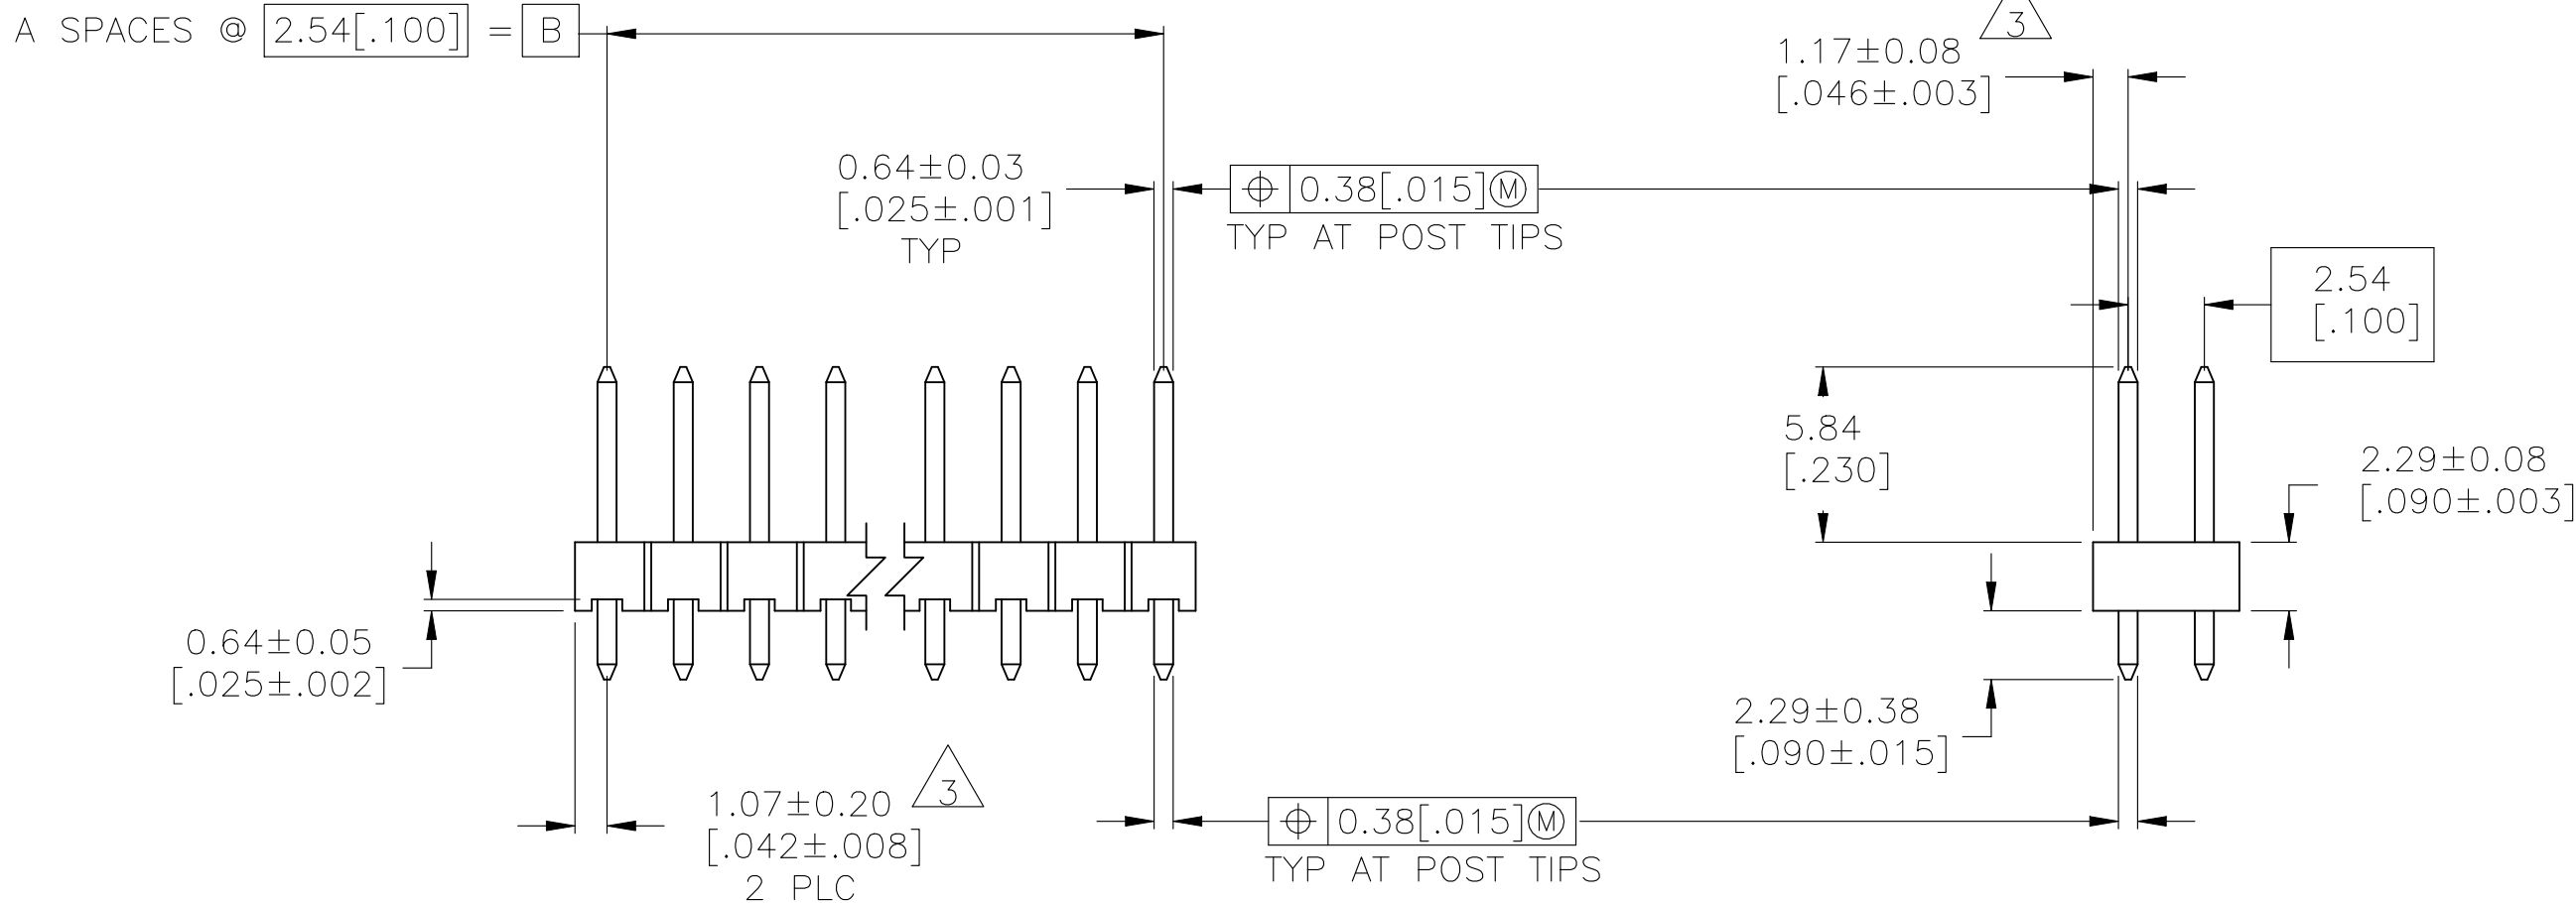


D

C

B

A

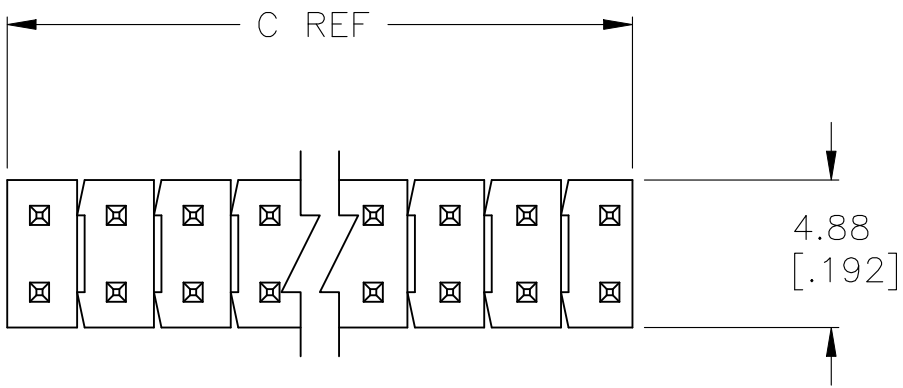

RECOMMENDED PC BOARD MOUNTING DIMENSIONS
FOR .063 [1.60] THICK PC BOARD AND
.012 [.305] STENCIL THICK.

- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- POST PLATING: 0.00254–0.00508[.000100–.000200] MATTE TIN–LEAD OVER 0.00127[.000050] NICKEL ENTIRE POST.
- HOUSING: LCP, COLOR–BLACK.
- POST: COPPER ALLOY.
- POST PLATING: 0.00254–0.00508[.000100–.000200] MATTE TIN OVER 0.00127[.000050] NICKEL ENTIRE POST.
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINIS

	101.19 [3.984]	99.06 [3.900]	39	80	9–146258–0
	98.65 [3.884]	96.52 [3.800]	38	78	8–146258–9
	96.11 [3.784]	93.98 [3.700]	37	76	8–146258–8
	93.57 [3.684]	91.44 [3.600]	36	74	8–146258–7
	91.03 [3.584]	88.90 [3.500]	35	72	8–146258–6
	88.49 [3.484]	86.36 [3.400]	34	70	8–146258–5
	85.95 [3.384]	83.82 [3.300]	33	68	8–146258–4
	83.41 [3.284]	81.28 [3.200]	32	66	8–146258–3
	80.87 [3.184]	78.74 [3.100]	31	64	8–146258–2
	78.33 [3.084]	76.20 [3.000]	30	62	8–146258–1
	75.79 [2.984]	73.66 [2.900]	29	60	8–146258–0
	73.25 [2.884]	71.12 [2.800]	28	58	7–146258–9
	70.71 [2.784]	68.58 [2.700]	27	56	7–146258–8
	68.17 [2.684]	66.04 [2.600]	26	54	7–146258–7
	65.63 [2.584]	63.5 [2.500]	25	52	7–146258–6
	63.09 [2.484]	60.96 [2.400]	24	50	7–146258–5
	60.55 [2.384]	58.42 [2.300]	23	48	7–146258–4
	58.01 [2.284]	55.88 [2.200]	22	46	7–146258–3
	55.47 [2.184]	53.34 [2.100]	21	44	7–146258–2
	52.93 [2.084]	50.80 [2.000]	20	42	7–146258–1
	50.39 [1.984]	48.26 [1.900]	19	40	7–146258–0
	47.85 [1.884]	45.72 [1.800]	18	38	6–146258–9
	45.31 [1.784]	43.18 [1.700]	17	36	6–146258–8
	42.77 [1.684]	40.64 [1.600]	16	34	6–146258–7
	40.23 [1.584]	38.10 [1.500]	15	32	6–146258–6
	37.69 [1.484]	35.56 [1.400]	14	30	6–146258–5
	35.15 [1.384]	33.02 [1.300]	13	28	6–146258–4
	32.61 [1.284]	30.48 [1.200]	12	26	6–146258–3
	30.07 [1.184]	27.94 [1.100]	11	24	6–146258–2
	27.53 [1.084]	25.40 [1.000]	10	22	6–146258–1
	24.99 [.984]	22.86 [.900]	9	20	6–146258–0
	22.45 [.884]	20.32 [.800]	8	18	5–146258–9
	19.91 [.784]	17.78 [.700]	7	16	5–146258–8
	17.37 [.684]	15.24 [.600]	6	14	5–146258–7
	14.83 [.584]	12.70 [.500]	5	12	5–146258–6
	12.29 [.484]	10.16 [.400]	4	10	5–146258–5
	9.75 [.384]	7.62 [.300]	3	8	5–146258–4
	7.21 [.284]	5.08 [.200]	2	6	5–146258–3
	4.67 [.184]	2.54 [.100]	1	4	5–146258–2
	[–]	[–]	0	2	5–146258–1
PLATING	C	B	A	NO. OF POSITIONS	PART NUMBER

	101.19 [3.984]	99.06 [3.900]	39	80	4–146258–0
	98.65 [3.884]	96.52 [3.800]	38	78	3–146258–9
	96.11 [3.784]	93.98 [3.700]	37	76	3–146258–8
	93.57 [3.684]	91.44 [3.600]	36	74	3–146258–7
	91.03 [3.584]	88.90 [3.500]	35	72	3–146258–6
	88.49 [3.484]	86.36 [3.400]	34	70	3–146258–5
	85.95 [3.384]	83.82 [3.300]	33	68	3–146258–4
	83.41 [3.284]	81.28 [3.200]	32	66	3–146258–3
	80.87 [3.184]	78.74 [3.100]	31	64	3–146258–2
	78.33 [3.084]	76.20 [3.000]	30	62	3–146258–1
	75.79 [2.984]	73.66 [2.900]	29	60	3–146258–0
	73.25 [2.884]	71.12 [2.800]	28	58	2–146258–9
	70.71 [2.784]	68.58 [2.700]	27	56	2–146258–8
	68.17 [2.684]	66.04 [2.600]	26	54	2–146258–7
	65.63 [2.584]	63.5 [2.500]	25	52	2–146258–6
	63.09 [2.484]	60.96 [2.400]	24	50	2–146258–5
	60.55 [2.384]	58.42 [2.300]	23	48	2–146258–4
	58.01 [2.284]	55.88 [2.200]	22	46	2–146258–3
	55.47 [2.184]	53.34 [2.100]	21	44	2–146258–2
	52.93 [2.084]	50.80 [2.000]	20	42	2–146258–1
	50.39 [1.984]	48.26 [1.900]	19	40	2–146258–0
	47.85 [1.884]	45.72 [1.800]	18	38	1–146258–9
	45.31 [1.784]	43.18 [1.700]	17	36	1–146258–8
	42.77 [1.684]	40.64 [1.600]	16	34	1–146258–7
	40.23 [1.584]	38.10 [1.500]	15	32	1–146258–6
	37.69 [1.484]	35.56 [1.400]	14	30	1–146258–5
	35.15 [1.384]	33.02 [1.300]	13	28	1–146258–4
	32.61 [1.284]	30.48 [1.200]	12	26	1–146258–3
	30.07 [1.184]	27.94 [1.100]	11	24	1–146258–2
	27.53 [1.084]	25.40 [1.000]	10	22	1–146258–1
	24.99 [.984]	22.86 [.900]	9	20	1–146258–0
	22.45 [.884]	20.32 [.800]	8	18	—146258–9
	19.91 [.784]	17.78 [.700]	7	16	—146258–8
	17.37 [.684]	15.24 [.600]	6	14	—146258–7
	14.83 [.584]	12.70 [.500]	5	12	—146258–6
	12.29 [.484]	10.16 [.400]	4	10	—146258–5
	9.75 [.384]	7.62 [.300]	3	8	—146258–4
	7.21 [.284]	5.08 [.200]	2	6	—146258–3
	4.67 [.184]	2.54 [.100]	1	4	—146258–2
	[–]	[–]	0	2	—146258–1
PLATING	C	B	A	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± –
1 PLC ± –
2 PLC ± 0.51[.02]
3 PLC ± 0.127[.005]
4 PLC ± 0.0127[.0005]
ANGLES ± –
FINISH SEE TABLE

DWN R BROWN 19JAN05
CHK J GESFORD 19JAN05
APVD J GESFORD 19JAN05

NAME
PRODUCT SPEC
APPLICATION SPEC
WEIGHT –

SIZE
CAGE CODE
DRAWING NO
RESTRICTED TO

TE Connectivity

HEADER ASSEMBLY, MOD II,
BREAKAWAY, DOUBLE ROW,
HIGH TEMPERATURE

A100779C=146258

CUSTOMER DRAWING

SCALE 4:1
SHEET 1 OF 1
REV J1