


**Applications**

- [RoHS Compliant, Halogen Free](#) ②
- [Lead-Free \(Qualified up to 260°C Reflow\)](#) ①
- Ideal for High Performance Isolated Converter Primary Switch Socket
- Optimized for Synchronous Rectification
- Low Conduction Losses
- High Cdv/dt Immunity
- Low Profile (<0.7mm)
- [Dual Sided Cooling Compatible](#) ①
- [Compatible with existing Surface Mount Techniques](#) ①
- Industrial Qualified

**DirectFET™ Power MOSFET** ②

Typical values (unless otherwise specified)

|                          |                       |                           |
|--------------------------|-----------------------|---------------------------|
| <b>V<sub>DSS</sub></b>   | <b>V<sub>GS</sub></b> | <b>R<sub>DS(on)</sub></b> |
| 40V min                  | ±20V max              | 0.70mΩ @ 10V              |
| <b>Q<sub>g tot</sub></b> | <b>Q<sub>gd</sub></b> | <b>V<sub>gs(th)</sub></b> |
| 220nC                    | 81nC                  | 2.8V                      |



[Applicable DirectFET Outline and Substrate Outline](#) ①

|           |           |  |           |           |  |           |           |           |  |
|-----------|-----------|--|-----------|-----------|--|-----------|-----------|-----------|--|
| <b>SB</b> | <b>SC</b> |  | <b>M2</b> | <b>M4</b> |  | <b>L4</b> | <b>L6</b> | <b>L8</b> |  |
|-----------|-----------|--|-----------|-----------|--|-----------|-----------|-----------|--|

**Description**

The IRF7739L1TRPbF combines the latest HEXFET® Power MOSFET Silicon technology with the advanced DirectFET™ packaging to achieve the lowest on-state resistance in a package that has a footprint smaller than a D<sup>2</sup>PAK and only 0.7 mm profile. The DirectFET package is compatible with existing layout geometries used in power applications, PCB assembly equipment and vapor phase, infra-red or convection soldering techniques, when [application note AN-1035](#) is followed regarding the manufacturing methods and processes. The DirectFET package allows dual sided cooling to maximize thermal transfer in power systems.


The IRF7739L1TRPbF is optimized for high frequency switching and synchronous rectification applications. The reduced total losses in the device coupled with the high level of thermal performance enables high efficiency and low temperatures, which are key for system reliability improvements, and makes this device ideal for high performance power converters.

**Ordering Information**


| Base part number | Package Type        | Standard Pack |          | Orderable Part Number |
|------------------|---------------------|---------------|----------|-----------------------|
|                  |                     | Form          | Quantity |                       |
| IRF7739L1TRPbF   | DirectFET Large Can | Tape and Reel | 4000     | IRF7739L1TRPbF        |

**Absolute Maximum Ratings**

|   | Parameter   | Max. | Units |
|---|---|------|-------|
| V <sub>DS</sub>                         | Drain-to-Source Voltage   | 40   | V     |
| V <sub>GS</sub>                         | Gate-to-Source Voltage  | ±20  |       |
| I <sub>D</sub> @ T <sub>C</sub> = 25°C  | Continuous Drain Current, V <sub>GS</sub> @ 10V (Silicon Limited) ④ | 270  | A     |
| I <sub>D</sub> @ T <sub>C</sub> = 100°C | Continuous Drain Current, V <sub>GS</sub> @ 10V (Silicon Limited) ④ | 190  |       |
| I <sub>D</sub> @ T <sub>A</sub> = 25°C  | Continuous Drain Current, V <sub>GS</sub> @ 10V (Silicon Limited) ③ | 46   |       |
| I <sub>D</sub> @ T <sub>C</sub> = 25°C  | Continuous Drain Current, V <sub>GS</sub> @ 10V (Package Limited) ④ | 375  |       |
| I <sub>DM</sub>                         | Pulsed Drain Current ⑤  | 1070 |       |
| E <sub>AS</sub>                         | Single Pulse Avalanche Energy ⑥                                     | 270  | mJ    |
| I <sub>AR</sub>                         | Avalanche Current ⑤   | 160  | A     |

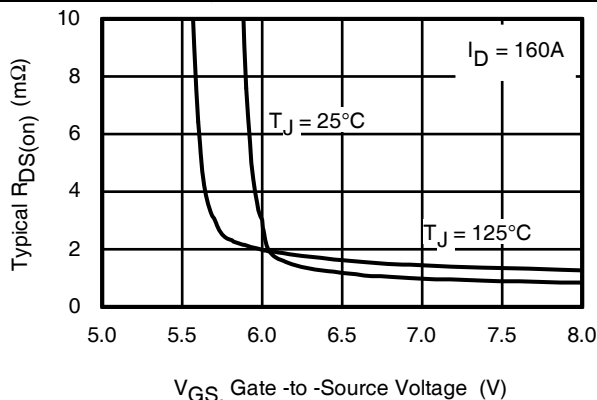

**Fig 1.** Typical On-Resistance vs. Gate Voltage

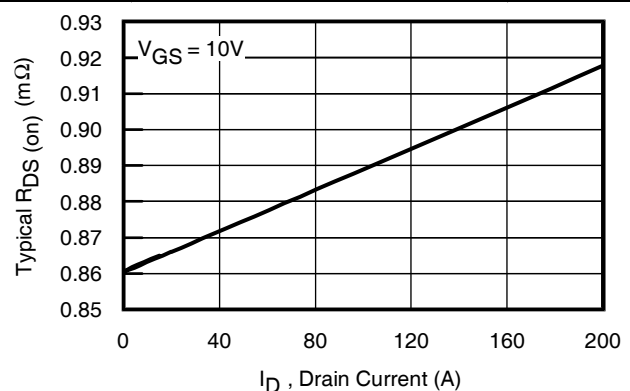

**Fig 2.** Typical On-Resistance vs. Drain Current

**Notes:**

- ① Click on the hyperlink (to the relevant technical document) for more details.
- ② Click on the hyperlink (to the DirectFET website) for more details
- ③ Surface mounted on 1 in. square Cu board, steady state.
- ④ T<sub>C</sub> measured with thermocouple mounted to top (Drain) of part.
- ⑤ Repetitive rating; pulse width limited by max. junction temperature.
- ⑥ Starting T<sub>J</sub> = 25°C, L = 0.021mH, R<sub>G</sub> = 25Ω, I<sub>AS</sub> = 160A.

**Static @  $T_J = 25^\circ\text{C}$  (unless otherwise specified)**

|                                | Parameter                            | Min. | Typ.  | Max. | Units                | Conditions  |
|--------------------------------|--------------------------------------|------|-------|------|----------------------|---|
| $BV_{DSS}$                     | Drain-to-Source Breakdown Voltage    | 40   | —     | —    | V                    | $V_{GS} = 0V, I_D = 250\mu A$                                       |
| $\Delta BV_{DSS}/\Delta T_J$   | Breakdown Voltage Temp. Coefficient  | —    | 0.008 | —    | V/ $^\circ\text{C}$  | Reference to $25^\circ\text{C}, I_D = 1.0\text{mA}$                 |
| $R_{DS(on)}$                   | Static Drain-to-Source On-Resistance | —    | 0.70  | 1.0  | m $\Omega$           | $V_{GS} = 10V, I_D = 160A$ ⑦  |
| $V_{GS(th)}$                   | Gate Threshold Voltage               | 2.0  | 2.8   | 4.0  | V                    | $V_{DS} = V_{GS}, I_D = 250\mu A$                                   |
| $\Delta V_{GS(th)}/\Delta T_J$ | Gate Threshold Voltage Coefficient   | —    | -6.7  | —    | mV/ $^\circ\text{C}$ |   |
| $I_{DSS}$                      | Drain-to-Source Leakage Current      | —    | —     | 20   | $\mu A$              | $V_{DS} = 40V, V_{GS} = 0V$   |
|                                |                                      | —    | —     | 250  |                      | $V_{DS} = 32V, V_{GS} = 0V, T_J = 125^\circ\text{C}$                |
| $I_{GSS}$                      | Gate-to-Source Forward Leakage       | —    | —     | 100  | nA                   | $V_{GS} = 20V$  |
|                                | Gate-to-Source Reverse Leakage       | —    | —     | -100 |                      | $V_{GS} = -20V$   |
| gfs                            | Forward Transconductance             | 280  | —     | —    | S                    | $V_{DS} = 10V, I_D = 160A$  |
| $Q_g$                          | Total Gate Charge                    | —    | 220   | 330  | nC                   | $V_{DS} = 20V$<br>$V_{GS} = 10V$<br>$I_D = 160A$<br>See Fig. 9      |
| $Q_{gs1}$                      | Pre-Vth Gate-to-Source Charge        | —    | 46    | —    |                      |   |
| $Q_{gs2}$                      | Post-Vth Gate-to-Source Charge       | —    | 19    | —    |                      |   |
| $Q_{gd}$                       | Gate-to-Drain Charge                 | —    | 81    | 120  |                      |   |
| $Q_{godr}$                     | Gate Charge Overdrive                | —    | 74    | —    |                      |   |
| $Q_{sw}$                       | Switch Charge ( $Q_{gs2} + Q_{gd}$ ) | —    | 100   | —    |                      |   |
| $Q_{oss}$                      | Output Charge                        | —    | 83    | —    | nC                   | $V_{DS} = 16V, V_{GS} = 0V$   |
| $R_G$                          | Gate Resistance                      | —    | 1.5   | —    | $\Omega$             |   |
| $t_{d(on)}$                    | Turn-On Delay Time                   | —    | 21    | —    | ns                   | $V_{DD} = 20V, V_{GS} = 10V$ ⑦<br>$I_D = 160A$<br>$R_G = 1.8\Omega$ |
| $t_r$                          | Rise Time                            | —    | 71    | —    |                      |   |
| $t_{d(off)}$                   | Turn-Off Delay Time                  | —    | 56    | —    |                      |   |
| $t_f$                          | Fall Time                            | —    | 42    | —    |                      |   |
| $C_{iss}$                      | Input Capacitance                    | —    | 11880 | —    | pF                   | $V_{GS} = 0V$<br>$V_{DS} = 25V$<br>$f = 1.0\text{MHz}$              |
| $C_{oss}$                      | Output Capacitance                   | —    | 2510  | —    |                      |   |
| $C_{rss}$                      | Reverse Transfer Capacitance         | —    | 1240  | —    |                      |   |
| $C_{oss}$                      | Output Capacitance                   | —    | 8610  | —    |                      |   |
| $C_{oss}$                      | Output Capacitance                   | —    | 2230  | —    |                      |   |
|                                |                                      |      |       |      |                      | $V_{GS} = 0V, V_{DS} = 32V, f = 1.0\text{MHz}$                      |

**Diode Characteristics**

|          | Parameter                              | Min. | Typ. | Max. | Units | Conditions   |
|----------|--|------|------|------|-------|--|
| $I_S$    | Continuous Source Current (Body Diode) | —    | —    | 110  | A     | MOSFET symbol showing the integral reverse p-n junction diode. |
| $I_{SM}$ | Pulsed Source Current (Body Diode) ⑤   | —    | —    | 1070 |       |  |
| $V_{SD}$ | Diode Forward Voltage                  | —    | —    | 1.3  | V     | $T_J = 25^\circ\text{C}, I_S = 160A, V_{GS} = 0V$ ⑦            |
| $t_{rr}$ | Reverse Recovery Time                  | —    | 87   | 130  | ns    | $T_J = 25^\circ\text{C}, I_F = 160A, V_{DD} = 20V$             |
| $Q_{rr}$ | Reverse Recovery Charge                | —    | 250  | 380  | nC    | $di/dt = 100A/\mu s$ ⑦   |

**Notes:**

⑤ Repetitive rating; pulse width limited by max. junction temperature.


 ⑦ Pulse width  $\leq 400\mu s$ ; duty cycle  $\leq 2\%$ .

**Absolute Maximum Ratings**


|                                 | Parameter                  | Max.         | Units |
|---------------------------------|----------------------------|--------------|-------|
| $P_D @ T_C = 25^\circ\text{C}$  | Power Dissipation ④        | 125          | W     |
| $P_D @ T_C = 100^\circ\text{C}$ | Power Dissipation ④        | 63           |       |
| $P_D @ T_A = 25^\circ\text{C}$  | Power Dissipation ①        | 3.8          |       |
| $T_P$                           | Peak Soldering Temperature | 270          | °C    |
| $T_J$                           | Operating Junction and     | -55 to + 175 |       |
| $T_{STG}$                       | Storage Temperature Range  |              |       |

**Thermal Resistance**


|                    | Parameter               | Typ. | Max. | Units |
|--------------------|-------------------------|------|------|-------|
| $R_{\theta JA}$    | Junction-to-Ambient ③   | —    | 40   | °C/W  |
| $R_{\theta JA}$    | Junction-to-Ambient ③   | 12.5 | —    |       |
| $R_{\theta JA}$    | Junction-to-Ambient ⑨   | 20   | —    |       |
| $R_{\theta J-Can}$ | Junction-to-Can ④⑩      | —    | 1.2  |       |
| $R_{\theta J-PCB}$ | Junction-to-PCB Mounted | —    | 0.4  |       |

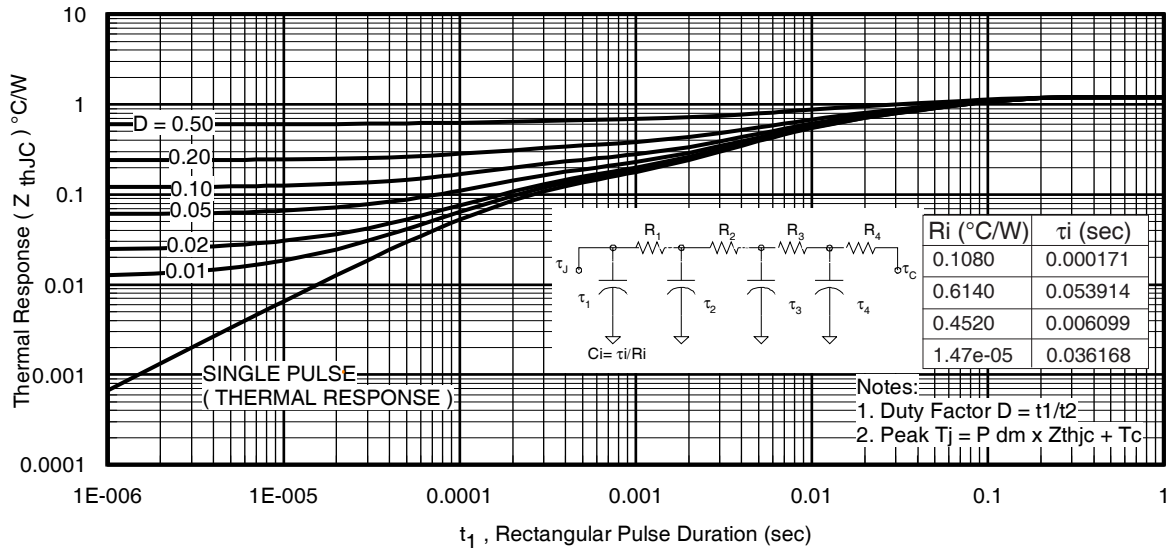
**Fig 3. Maximum Effective Transient Thermal Impedance, Junction-to-Case ④**
**Notes:**

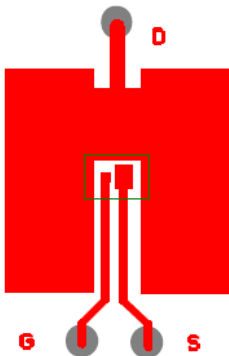
- ③ Surface mounted on 1 in. square Cu board, steady state.
- ④  $T_C$  measured with thermocouple incontact with top (Drain) of part.
- ⑤ Used double sided cooling, mounting pad with large heatsink.
- ⑨ Mounted on minimum footprint full size board with metalized back and with small clip heatsink.
- ⑩  $R_{\theta}$  is measured at  $T_J$  of approximately  $90^\circ\text{C}$ .













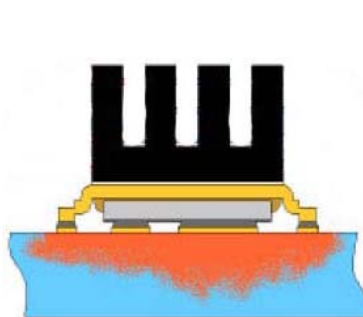
③ Surface mounted on 1 in. square Cu board (still air).





⑨ Mounted on minimum footprint full size board with metalized back and with small clip heatsink. (still air)

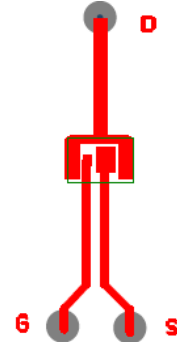

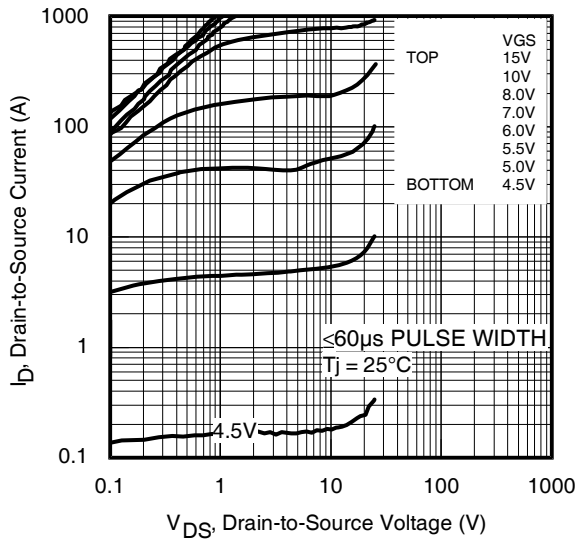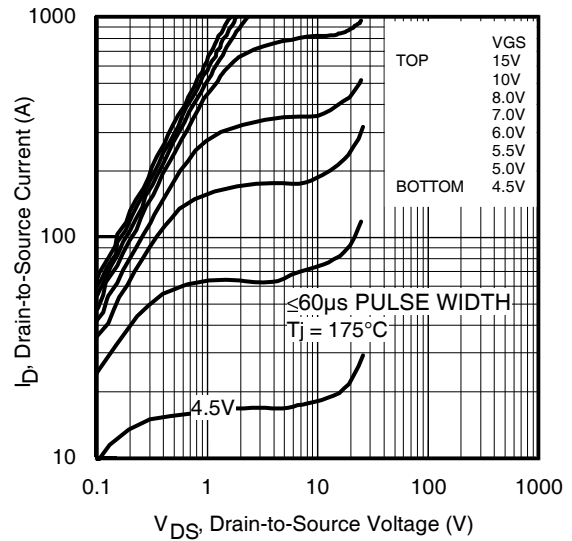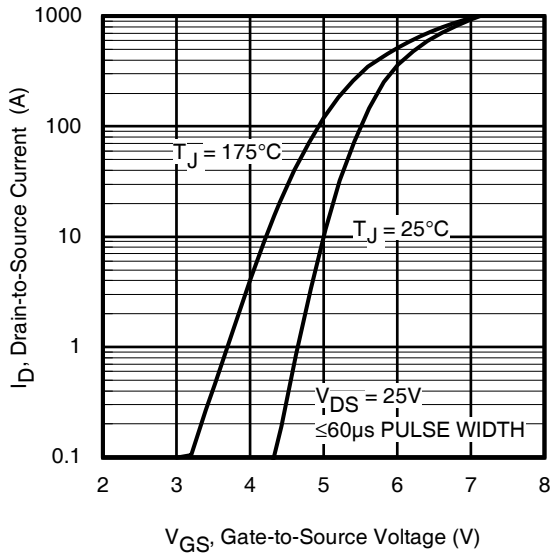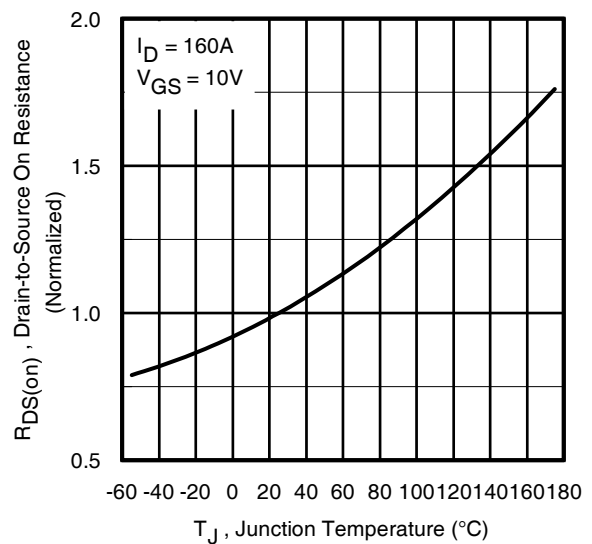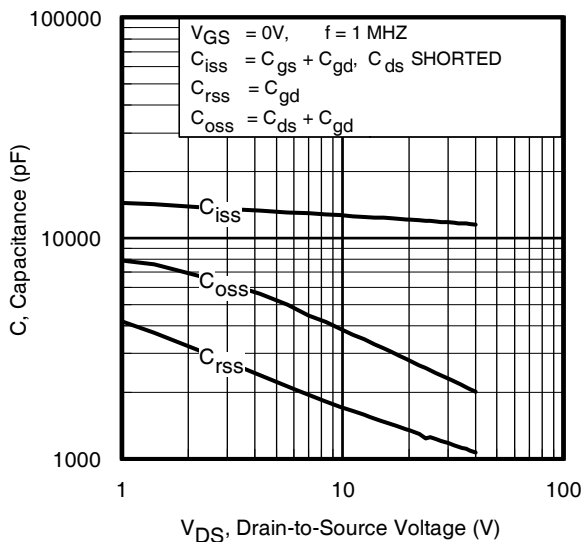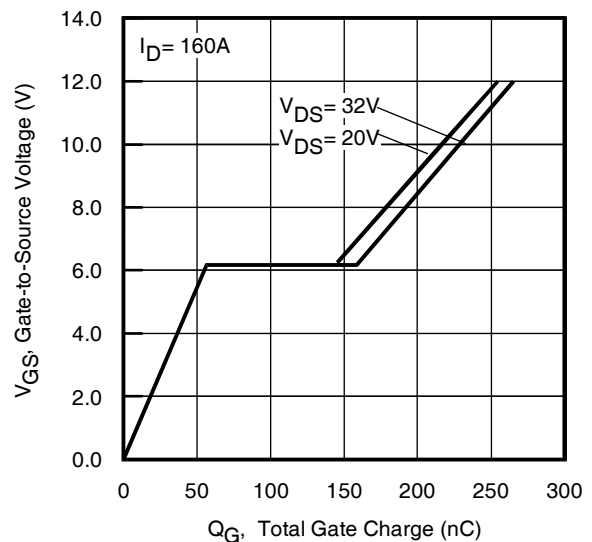
**Fig 4. Typical Output Characteristics**

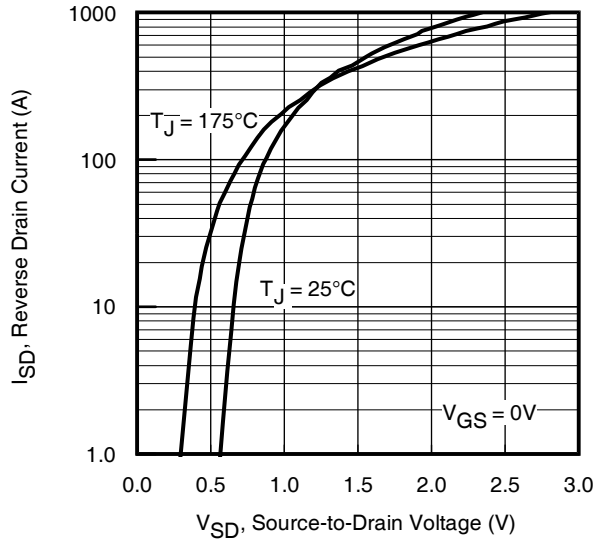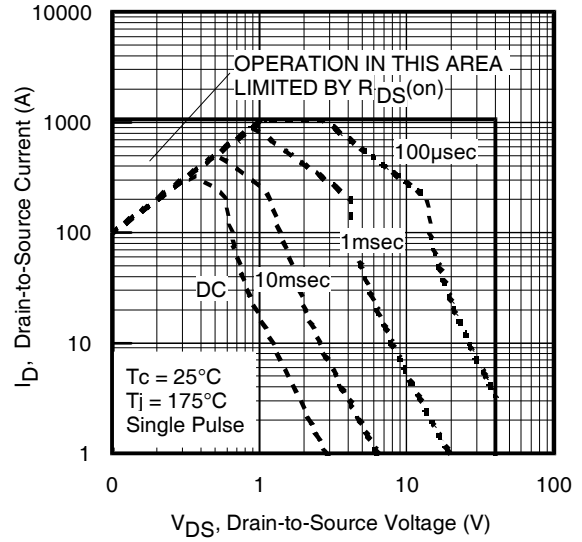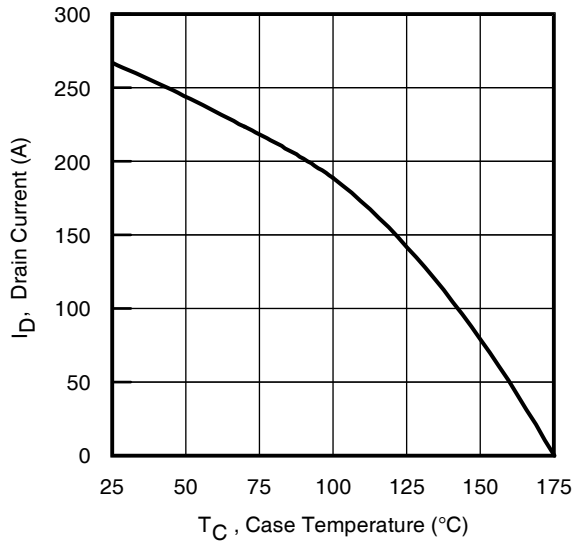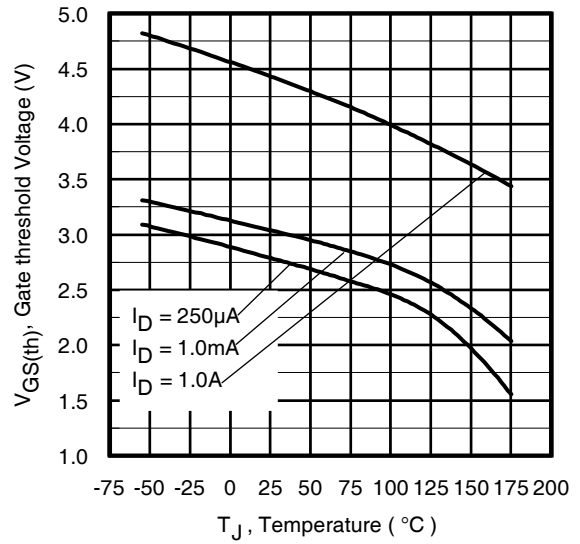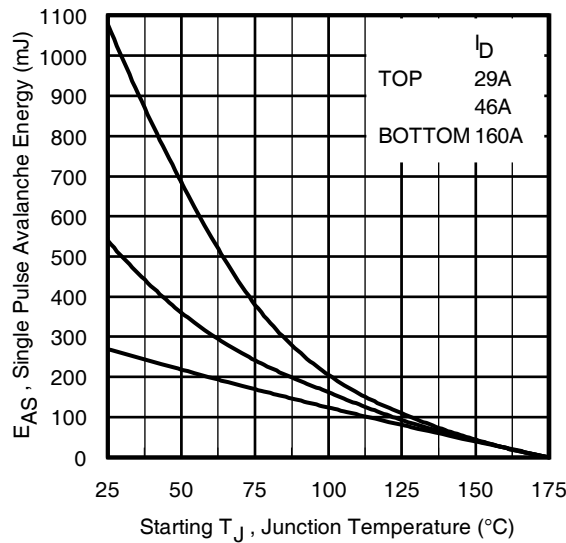**Fig 5. Typical Output Characteristics**

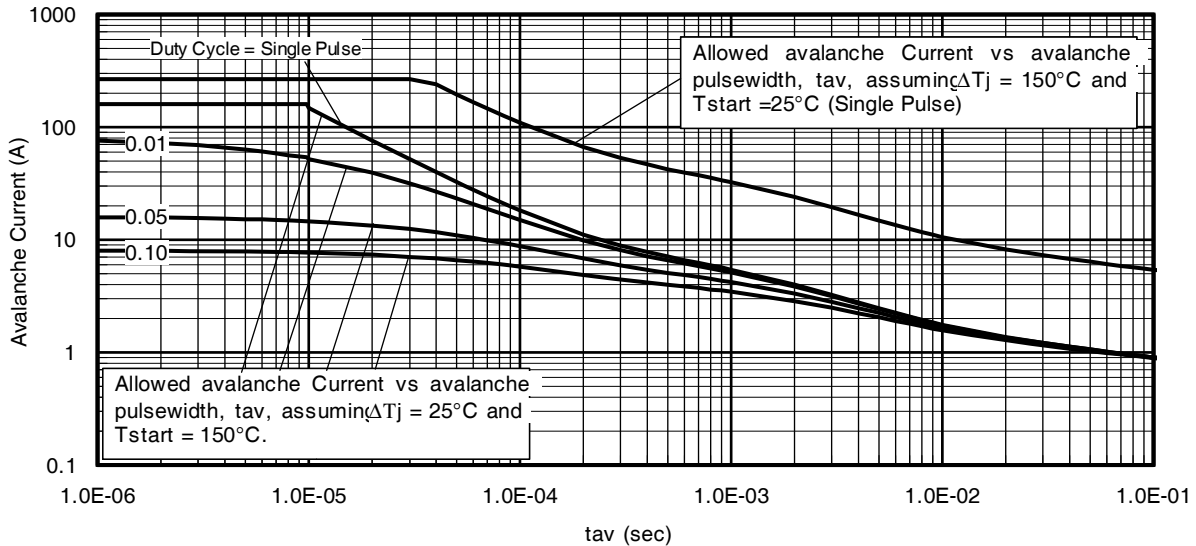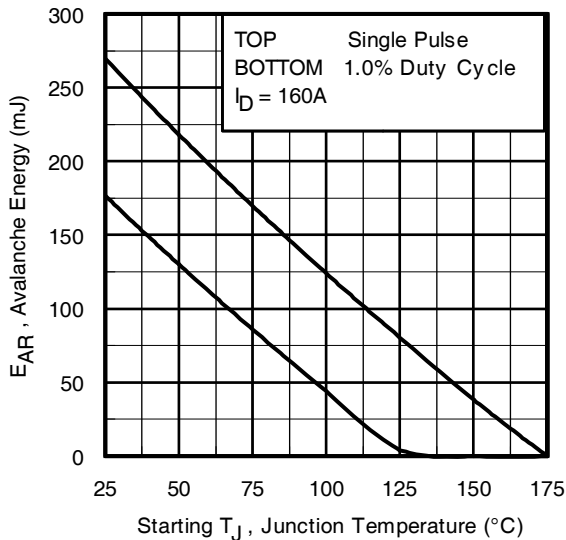**Fig 6. Typical Transfer Characteristics**

**Fig 7. Normalized On-Resistance vs. Temperature**

**Fig 8. Typical Capacitance vs. Drain-to-Source Voltage**

**Fig 9. Typical Total Gate Charge vs. Gate-to-Source Voltage**


**Fig 10.** Typical Source-Drain Diode Forward Voltage

**Fig11.** Maximum Safe Operating Area

**Fig 12.** Maximum Drain Current vs. Case Temperature

**Fig 13.** Typical Threshold Voltage vs. Junction Temperature

**Fig 14.** Maximum Avalanche Energy vs. Drain Current

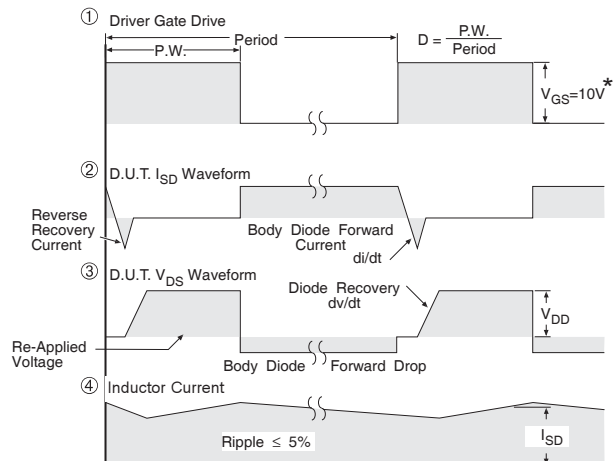
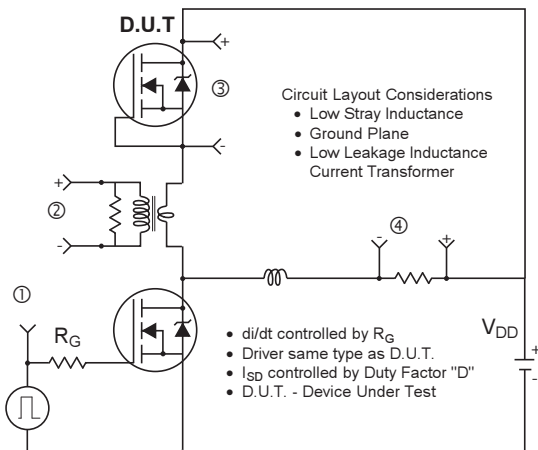

**Fig 15. Typical Avalanche Current vs. Pulsewidth**

**Fig 16. Maximum Avalanche Energy vs. Temperature**
**Notes on Repetitive Avalanche Curves, Figures 15, 16:**  
**(For further info, see AN-1005)**

1. Avalanche failures assumption:  
Purely a thermal phenomenon and failure occurs at a temperature far in excess of  $T_{jmax}$ . This is validated for every part type.
2. Safe operation in Avalanche is allowed as long as  $T_{jmax}$  is not exceeded.
3. Equation below based on circuit and waveforms shown in Figures 19a, 19b.
4.  $P_{D(ave)}$  = Average power dissipation per single avalanche pulse.
5.  $BV$  = Rated breakdown voltage (1.3 factor accounts for voltage increase during avalanche).
6.  $I_{av}$  = Allowable avalanche current.
7.  $\Delta T$  = Allowable rise in junction temperature, not to exceed  $T_{jmax}$  (assumed as 25°C in Figure 15, 16).  
 $t_{av}$  = Average time in avalanche.  
 $D$  = Duty cycle in avalanche =  $t_{av} \cdot f$   
 $Z_{thJC}(D, t_{av})$  = Transient thermal resistance, see figure 11)

$$P_{D(ave)} = 1/2 ( 1.3 \cdot BV \cdot I_{av} ) = \Delta T / Z_{thJC}$$


$$I_{av} = 2\Delta T / [ 1.3 \cdot BV \cdot Z_{thJC} ]$$

$$E_{AS(AR)} = P_{D(ave)} \cdot t_a$$




\*  $V_{GS} = 5V$  for Logic Level Devices


**Fig 17. Diode Reverse Recovery Test Circuit for N-Channel HEXFET® Power MOSFETs**

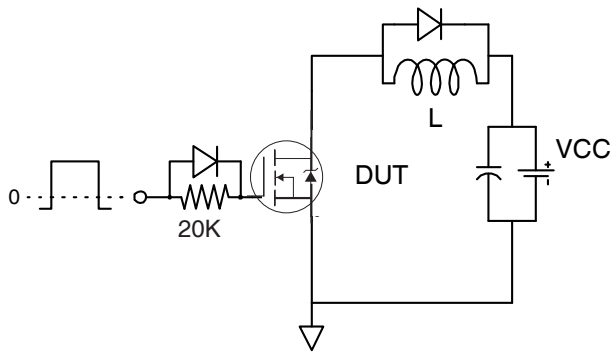


**Fig 18a.** Gate Charge Test Circuit

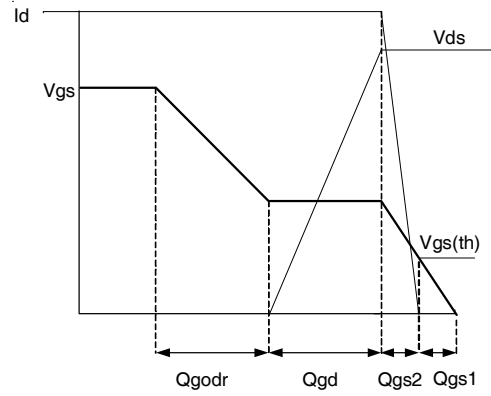


**Fig 18b.** Gate Charge Waveform

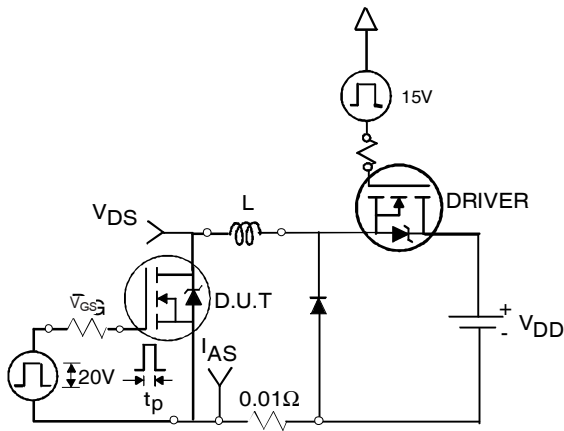


**Fig 19a.** Unclamped Inductive Test Circuit

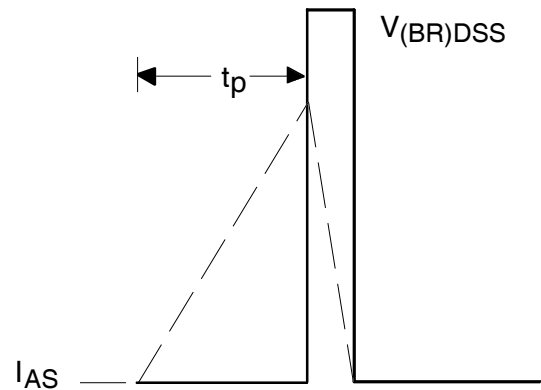

**Fig 19b.** Unclamped Inductive Waveforms

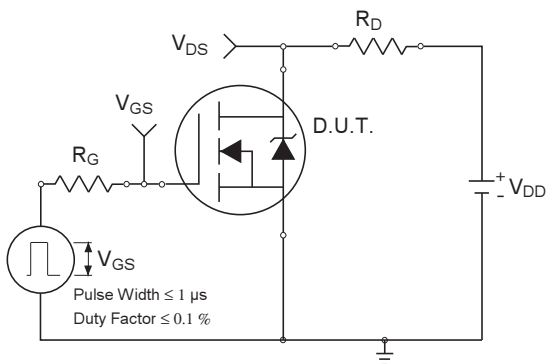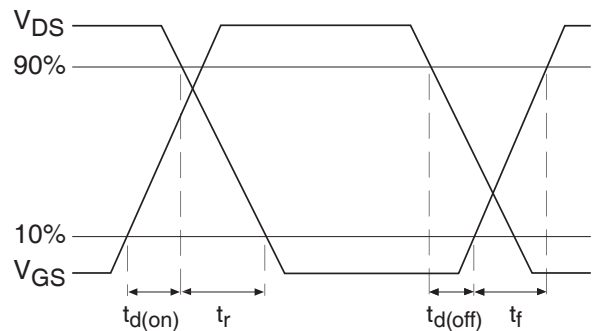


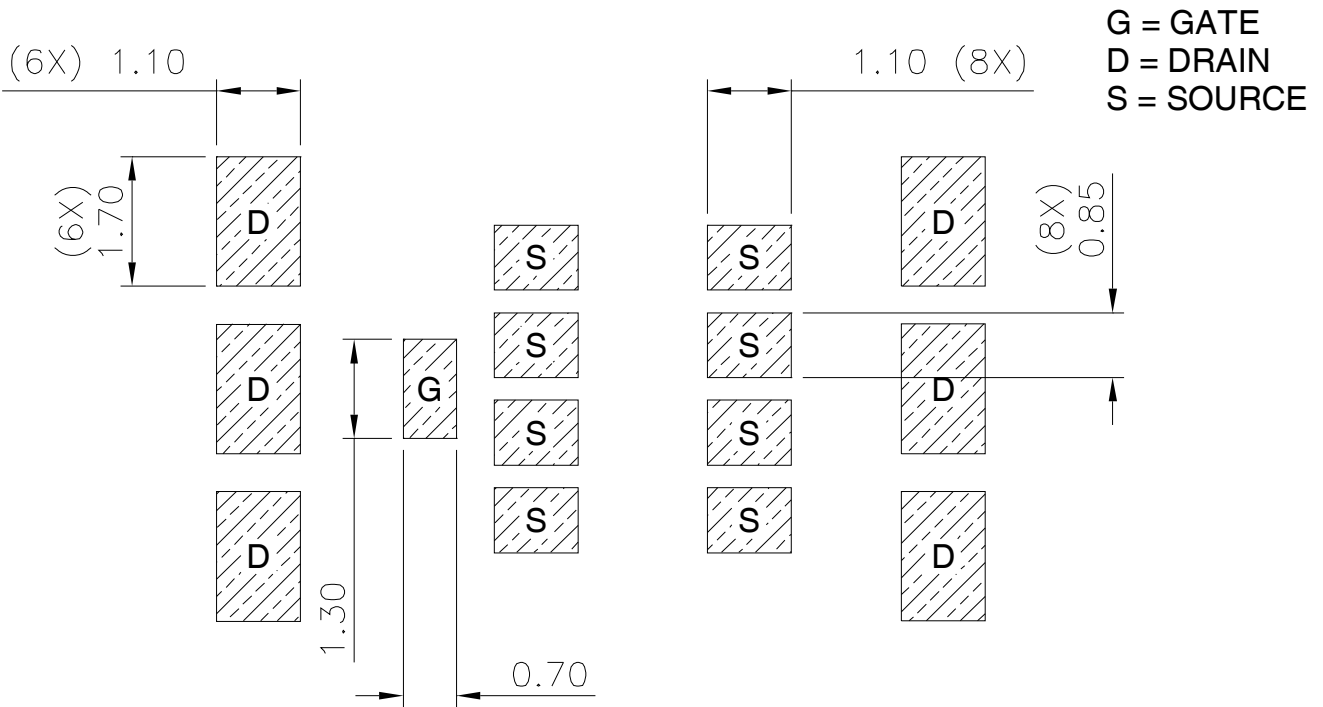
**Fig 20a.** Switching Time Test Circuit



**Fig 20b.** Switching Time Waveforms

**DirectFET™ Board Footprint, L8 (Large Size Can).**

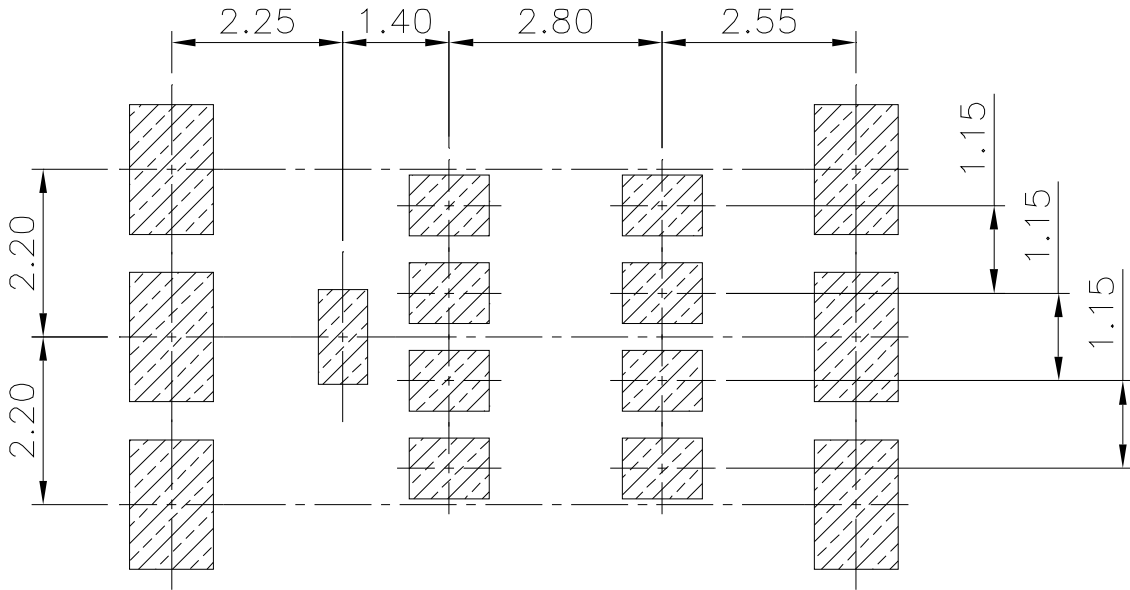Please see [AN-1035](#) for DirectFET assembly details and stencil and substrate design recommendations




Note: For the most current drawing please refer to IR website at <http://www.irf.com/package/>




### DirectFET™ Outline Dimension, L8 Outline (LargeSize Can).

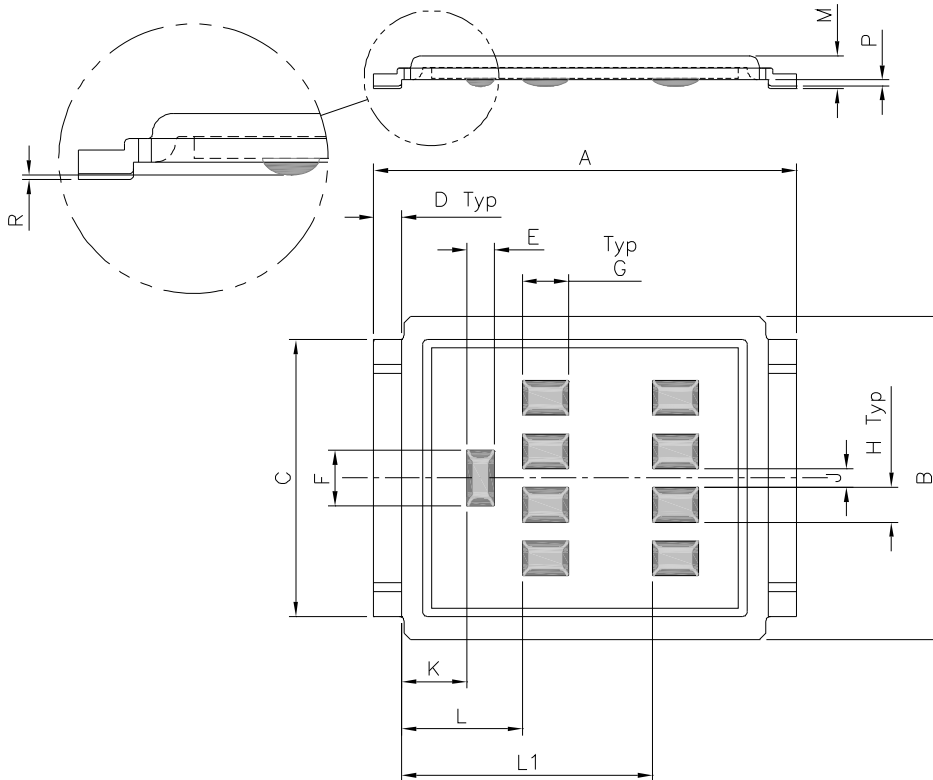Please see [AN-1035](#) for DirectFET assembly details and stencil and substrate design recommendations




| CODE | METRIC |      | IMPERIAL |       |
|------|--------|------|----------|-------|
|      | MIN    | MAX  | MIN      | MAX   |
| A    | 9.05   | 9.15 | 0.356    | 0.360 |
| B    | 6.85   | 7.10 | 0.270    | 0.280 |
| C    | 5.90   | 6.00 | 0.232    | 0.236 |
| D    | 0.55   | 0.65 | 0.022    | 0.026 |
| E    | 0.58   | 0.62 | 0.023    | 0.024 |
| F    | 1.18   | 1.22 | 0.046    | 0.048 |
| G    | 0.98   | 1.02 | 0.039    | 0.040 |
| H    | 0.73   | 0.77 | 0.029    | 0.030 |
| J    | 0.38   | 0.42 | 0.015    | 0.017 |
| K    | 1.35   | 1.45 | 0.053    | 0.057 |
| L    | 2.55   | 2.65 | 0.100    | 0.104 |
| L1   | 5.35   | 5.45 | 0.211    | 0.215 |
| M    | 0.68   | 0.74 | 0.027    | 0.029 |
| P    | 0.09   | 0.17 | 0.003    | 0.007 |
| R    | 0.02   | 0.08 | 0.001    | 0.003 |

### DirectFET™ Part Marking

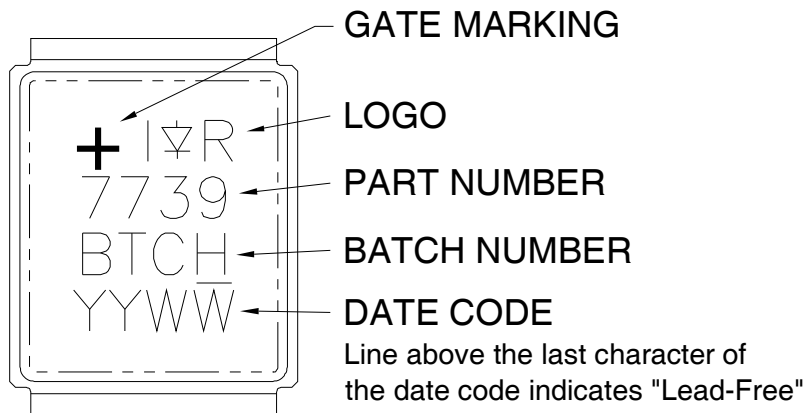

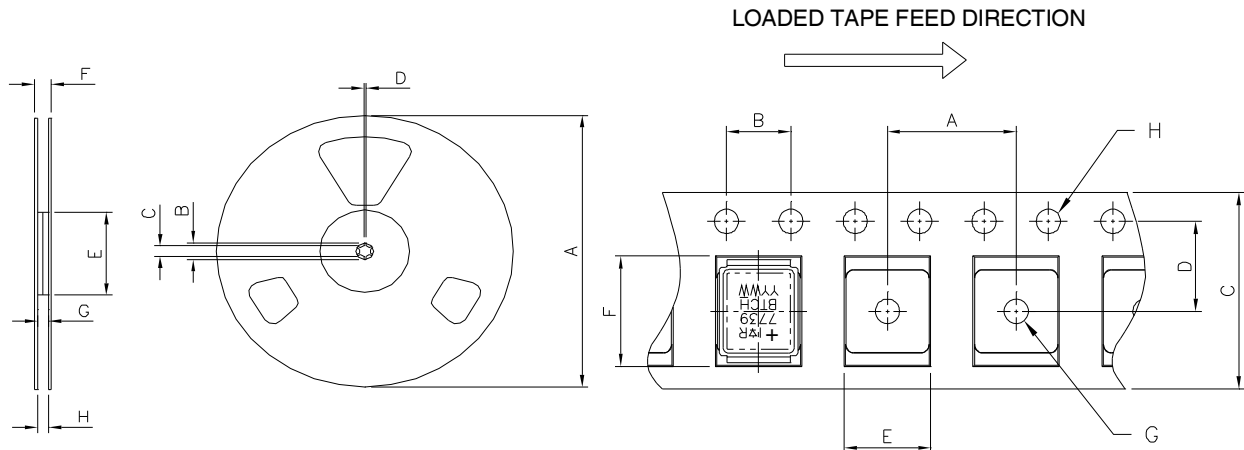Note: For the most current drawing please refer to IR website at <http://www.irf.com/package/>

**DirectFET™ Tape & Reel Dimension (Showing component orientation).**


NOTE: Controlling dimensions in mm  
Std reel quantity is 4000 parts. (ordered as IRF7739L1TRPbF).

| REEL DIMENSIONS            |        |        |          |       |
|----------------------------|--------|--------|----------|-------|
| STANDARD OPTION (QTY 4000) |        |        |          |       |
| CODE                       | METRIC |        | IMPERIAL |       |
|                            | MIN    | MAX    | MIN      | MAX   |
| A                          | 330.00 | N.C    | 12.992   | N.C   |
| B                          | 20.20  | N.C    | 0.795    | N.C   |
| C                          | 12.80  | 13.20  | 0.504    | 0.520 |
| D                          | 1.50   | N.C    | 0.059    | N.C   |
| E                          | 99.00  | 100.00 | 3.900    | 3.940 |
| F                          | N.C    | 22.40  | N.C      | 0.880 |
| G                          | 16.40  | 18.40  | 0.650    | 0.720 |
| H                          | 15.90  | 19.40  | 0.630    | 0.760 |

NOTE: CONTROLLING DIMENSIONS IN MM

| CODE | DIMENSIONS |       |          |       |
|------|------------|-------|----------|-------|
|      | METRIC     |       | IMPERIAL |       |
|      | MIN        | MAX   | MIN      | MAX   |
| A    | 11.90      | 12.10 | 4.69     | 0.476 |
| B    | 3.90       | 4.10  | 0.154    | 0.161 |
| C    | 15.90      | 16.30 | 0.623    | 0.642 |
| D    | 7.40       | 7.60  | 0.291    | 0.299 |
| E    | 7.20       | 7.40  | 0.283    | 0.291 |
| F    | 9.90       | 10.10 | 0.390    | 0.398 |
| G    | 1.50       | N.C   | 0.059    | N.C   |
| H    | 1.50       | 1.60  | 0.059    | 0.063 |

Note: For the most current drawing please refer to IR website at <http://www.irf.com/package/>

**Qualification Information†**

|                            |                |                                   |
|----------------------------|----------------|-----------------------------------|
| Qualification level        | Industrial ††* |                                   |
| Moisture Sensitivity Level | DirectFET      | MSL1<br>(per JEDEC J-STD-020D†††) |
| RoHS Compliant             | Yes            |                                   |

† Qualification standards can be found at International Rectifier's web site <http://www.irf.com/product-info/reliability>

†† Higher qualification ratings may be available should the user have such requirements. Please contact your International Rectifier sales representative for further information: <http://www.irf.com/whoto-call/salesrep/>

††† Applicable version of JEDEC standard at the time of product release.

\* Industrial qualification standards except autoclave test conditions

**Revision History**

| Date      | Comments   |
|-----------|--|
| 2/12/2013 | TR1 option removed and Tape & Reel Info updated accordingly. Hyperlinks added throw-out the document |

## **IMPORTANT NOTICE**

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on the product, technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies office ([www.infineon.com](http://www.infineon.com)).

## **WARNINGS**

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.