



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn100%	Yes	Yes

more than you expect



ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	2-4 @20°C	1.5 mOhms max.
D.C. RESISTANCE	3-5 @20°C	1.5 mOhms max.
D.C. RESISTANCE	8-10 @20°C	3 mOhms max.
⑥D INDUCTANCE	2-5 tie(3+4), 100kHz, 100mVAC, Ls	65.0uH min.
LEAKAGE INDUCTANCE	2-5 tie(3+4, 8+10), 100kHz, 100mVAC, Ls	150nH max.
⑥D DIELECTRIC	2-8 tie(3+4), 2250VDC, 1 second	-
URNS RATIO	(8-10):(2-4)	1.5:1, ±1%
URNS RATIO	(8-10):(3-5)	1.5:1, ±1%

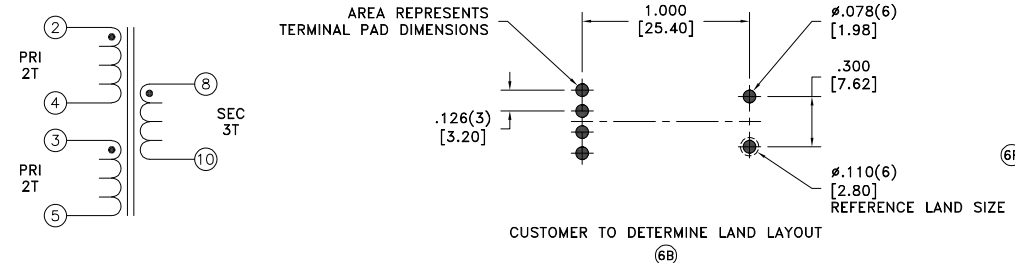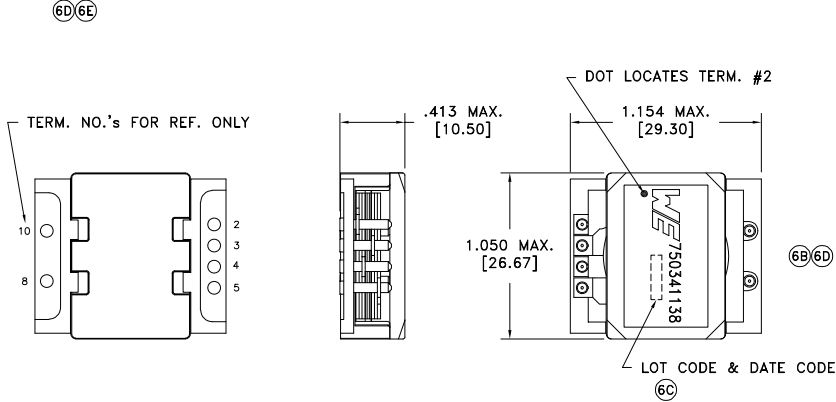


GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

⑥F VOLTAGE-TIME: 80VuS

REV.	DATE	Packaging Specifications
6F	2/22	Method: Tape & Reel
6E	4/20	PKG-0793
6D	4/14	www.we-online.com/midcom
6C	11/12	SEE REVISION SHEET FOR REVISION LEVEL



Tolerances unless otherwise specified:
 Angles: ±1° Decimals: ±.005 [.13]
 Fractions: ±1/64 Footprint: ±.005 [.13]
 This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE
TRANSFORMER
 eiSos p/n: 750341138



PART NO.
750341138
 SPECIFICATION SHEET 1 OF 1