

CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn100%	Yes	Yes

more than you expect







ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	2-4 @20°C	1.5 mOhms max.
D.C. RESISTANCE	3-5 @20°C	1.5 mOhms max.
D.C. RESISTANCE	7-11 @20°C	1.2 mOhms max.
INDUCTANCE	2-5 tie(3+4), 100kHz, 100mVAC, Ls	65.0uH min.
LEAKAGE INDUCTANCE	2-5 tie(3+4, 7+11), 100kHz, 100mVAC, Ls	150nH max.
DIELECTRIC	2-7 tie(3+4), 2250VDC, 1 second	-
URNS RATIO	(7-11):(2-4)	1:1, ±1%
URNS RATIO	(7-11):(3-5)	1:1, ±1%

6D/6E

TERM. NO.'s FOR REF. ONLY

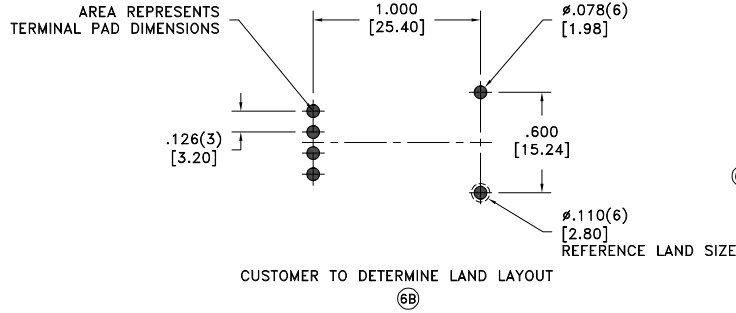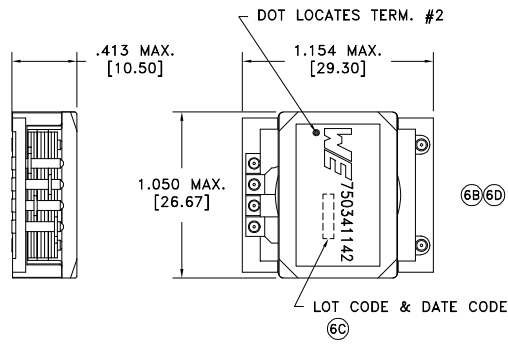

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

6F VOLTAGE-TIME: 80VuS

REV.	DATE	Packaging Specifications	CONVENTION PLACEMENT
6F	2/22	Method: Tape & Reel	
6E	4/20	PKG-0793	
6D	4/14	www.we-online.com/midcom	
6C	11/12	SEE REVISION SHEET FOR REVISION LEVEL	

Tolerances unless otherwise specified:
 Angles: ±1° Decimals: ±.005 [.13]
 Fractions: ±1/64 Footprint: ±.005 [.13]

This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE
TRANSFORMER

eiSos p/n: 750341142

PART NO.
750341142

SPECIFICATION SHEET 1 OF 1

