

SMPS Series N-Channel IGBT with Anti-Parallel Hyperfast Diode

600 V

HGTG12N60A4D, HGTP12N60A4D, HGT1S12N60A4DS

The HGTG12N60A4D, HGTP12N60A4D and HGT1S12N60A4DS are MOS gated high voltage switching devices combining the best features of MOSFETs and bipolar transistors. These devices have the high input impedance of a MOSFET and the low on-state conduction loss of a bipolar transistor. The much lower on-state voltage drop varies only moderately between 25°C and 150°C. The IGBT used is the development type TA49335. The diode used in anti-parallel is the development type TA49371.

This IGBT is ideal for many high voltage switching applications operating at high frequencies where low conduction losses are essential. This device has been optimized for high frequency switch mode power supplies.

Formerly Developmental Type TA49337.



Features

- >100 kHz Operation 390 V, 12 A
- 200 kHz Operation 390 V, 9A
- 600 V Switching SOA Capability
- Typical Fall Time 70 ns at $T_J = 125^\circ\text{C}$
- Low Conduction Loss
- Temperature Compensating Saber™ Model
- Related Literature
 - ◆ TB334 "Guidelines for Soldering Surface Mount Components to PC Boards"
- These are Pb-Free Devices




ON Semiconductor®


www.onsemi.com



TO-220-3LD
CASE 340AT
JEDEC ALTERNATE
VERSION




D2PAK-3
(TO-263, 3-LEAD)
CASE 418AJ
JEDEC STYLE



TO-247-3LD
SHORT LEAD
CASE 340CK
JEDEC STYLE

MARKING DIAGRAM

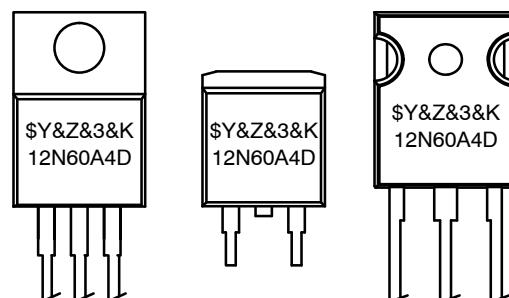

\$Y = ON Semiconductor Logo
&Z = Assembly Plant Code
&3 = Numeric Date Code
&K = Lot Code
12N60A4D = Specific Device Code

ORDERING INFORMATION

See detailed ordering and shipping information on page 8 of this data sheet.

HGTG12N60A4D, HGTP12N60A4D, HGT1S12N60A4DS

ABSOLUTE MAXIMUM RATINGS (T_C = 25°C unless otherwise specified)

Parameter	Symbol	HGTG12N60A4D, HGTP12N60A4D, HGT1S12N60A4DS	Unit
Collector to Emitter Voltage	BV _{CES}	600	V
Collector Current Continuous At T _C = 25°C At T _C = 110°C	I _{C25} I _{C110}	54 23	A A
Collector Current Pulsed (Note 1)	I _{CM}	96	A
Gate to Emitter Voltage Continuous	V _{GES}	±20	V
Gate to Emitter Voltage Pulsed	V _{GEM}	±30	V
Switching Safe Operating Area at T _J = 150°C, Figure 2	SSOA	60 A at 600 V	
Power Dissipation Total at T _C = 25°C	P _D	167	W
Power Dissipation Derating T _C > 25°C		1.33	W/°C
Operating and Storage Junction Temperature Range	T _J , T _{STG}	-55 to 150	°C
Maximum Temperature for Soldering Leads at 0.063 in (1.6 mm) from Case for 10 s Package Body for 10 s, see Tech Brief 334.	T _L T _{pkg}	300 260	°C °C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Pulse width limited by maximum junction temperature.

ELECTRICAL CHARACTERISTICS (T_J = 25°C unless otherwise specified)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Collector to Emitter Breakdown Voltage	BV _{CES}	I _C = 250 μA, V _{GE} = 0 V	600	—	—	V
Collector to Emitter Leakage Current	I _{CES}	V _{CE} = 600 V	T _J = 25°C	—	—	250 μA
			T _J = 125°C	—	—	2.0 mA
Collector to Emitter Saturation Voltage	V _{CE(SAT)}	I _C = 12 A, V _{GE} = 15 V	T _J = 25°C	—	2.0	2.7 V
			T _J = 125°C	—	1.6	2.0 V
Gate to Emitter Threshold Voltage	V _{GE(TH)}	I _C = 250 μA, V _{CE} = 600 V	—	5.6	—	V
Gate to Emitter Leakage Current	I _{GES}	V _{GE} = ±20 V	—	—	±250	nA
Switching SOA	SSOA	T _J = 150°C, R _G = 10 Ω, V _{GE} = 15 V, L = 100 μH, V _{CE} = 600 V	60	—	—	A
Gate to Emitter Plateau Voltage	V _{GEP}	I _C = 12 A, V _{CE} = 300 V	—	8	—	V
On-State Gate Charge	Q _{g(ON)}	I _C = 12 A, V _{CE} = 300 V	V _{GE} = 15 V	78	96	nC
			V _{GE} = 20 V	—	97	120 nC
Current Turn-On Delay Time	t _{d(ON)I}	IGBT and Diode at T _J = 25°C, I _{CE} = 12 A, V _{CE} = 390 V, V _{GE} = 15 V, R _G = 10 Ω, L = 500 μH, Test Circuit (Figure 24)	—	17	—	ns
Current Rise Time	t _{rI}		—	8	—	ns
Current Turn-Off Delay Time	t _{d(OFF)I}		—	96	—	ns
Current Fall Time	t _{fI}		—	18	—	ns
Turn-On Energy (Note 3)	E _{ON1}		—	55	—	μJ
Turn-On Energy (Note 3)	E _{ON2}		—	160	—	μJ
Turn-Off Energy (Note 2)	E _{OFF}		—	50	—	μJ
Current Turn-On Delay Time	t _{d(ON)I}		—	17	—	ns
Current Rise Time	t _{rI}	IGBT and Diode at T _J = 125°C, I _{CE} = 12 A, V _{CE} = 390 V, V _{GE} = 15 V, R _G = 10 Ω, L = 500 μH, Test Circuit (Figure 24)	—	16	—	ns
Current Turn-Off Delay Time	t _{d(OFF)I}		—	110	170	ns
Current Fall Time	t _{fI}		—	70	95	ns
Turn-On Energy (Note 3)	E _{ON1}		—	55	—	μJ
Turn-On Energy (Note 3)	E _{ON2}		—	250	350	μJ
Turn-Off Energy (Note 2)	E _{OFF}		—	175	285	μJ

HGTG12N60A4D, HGTP12N60A4D, HGT1S12N60A4DS

ELECTRICAL CHARACTERISTICS ($T_J = 25^\circ\text{C}$ unless otherwise specified) (continued)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Diode Forward Voltage	V_{EC}	$I_{EC} = 12 \text{ A}$	–	2.2	–	V
Diode Reverse Recovery Time	t_{rr}	$I_{EC} = 12 \text{ A}, dI_{EC}/dt = 200 \text{ A}/\mu\text{s}$	–	30	–	ns
		$I_{EC} = 1 \text{ A}, dI_{EC}/dt = 200 \text{ A}/\mu\text{s}$	–	18	–	ns
Thermal Resistance Junction To Case	$R_{\theta JC}$	IGBT	–	–	0.75	$^\circ\text{C}/\text{W}$
		Diode	–	–	2.0	$^\circ\text{C}/\text{W}$

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

- Turn-Off Energy Loss (E_{OFF}) is defined as the integral of the instantaneous power loss starting at the trailing edge of the input pulse and ending at the point where the collector current equals zero ($I_{CE} = 0 \text{ A}$). All devices were tested per JEDEC Standard No. 24-1 Method for Measurement of Power Device Turn-Off Switching Loss. This test method produces the true total Turn-Off Energy Loss.
- Values for two Turn-On loss conditions are shown for the convenience of the circuit designer. E_{ON1} is the turn-on loss of the IGBT only. E_{ON2} is the turn-on loss when a typical diode is used in the test circuit and the diode is at the same T_J as the IGBT. The diode type is specified in Figure 24.

TYPICAL PERFORMANCE CURVES (unless otherwise specified)

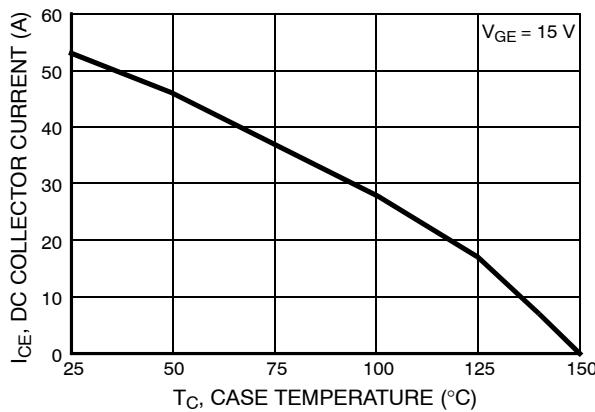


Figure 1. DC COLLECTOR CURRENT vs. CASE TEMPERATURE

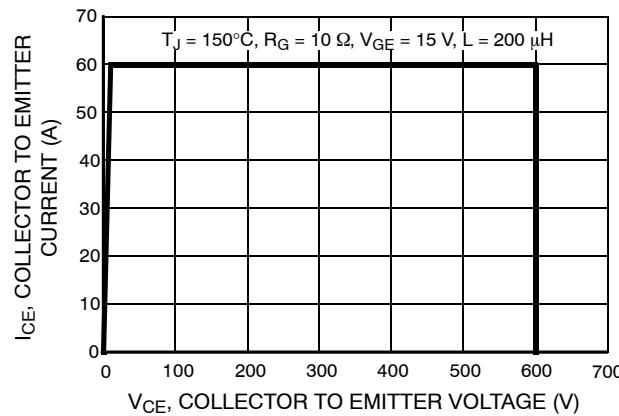


Figure 2. MINIMUM SWITCHING SAFE OPERATING AREA

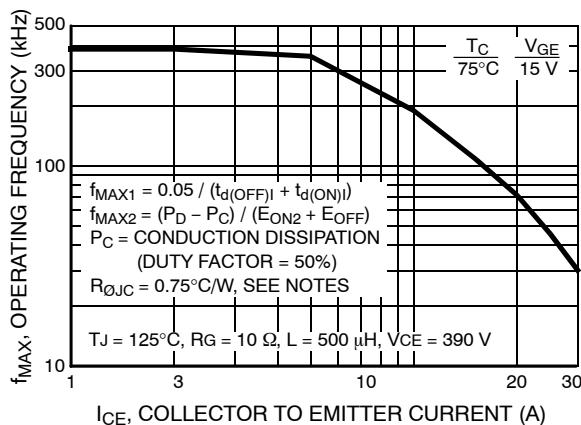


Figure 3. OPERATING FREQUENCY vs. COLLECTOR TO EMITTER CURRENT

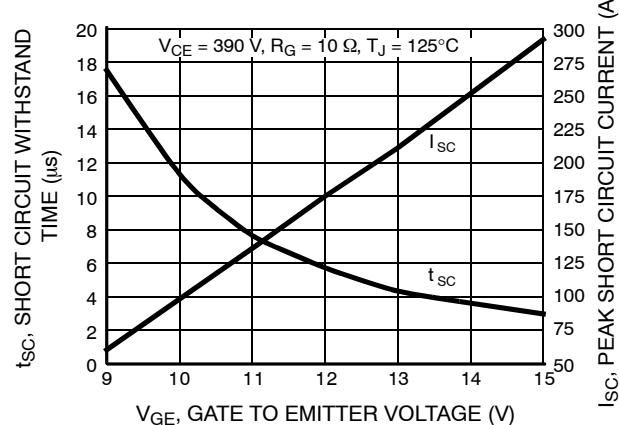


Figure 4. SHORT CIRCUIT WITHSTAND TIME

HGTG12N60A4D, HGTP12N60A4D, HGT1S12N60A4DS

TYPICAL PERFORMANCE CURVES (unless otherwise specified) (continued)

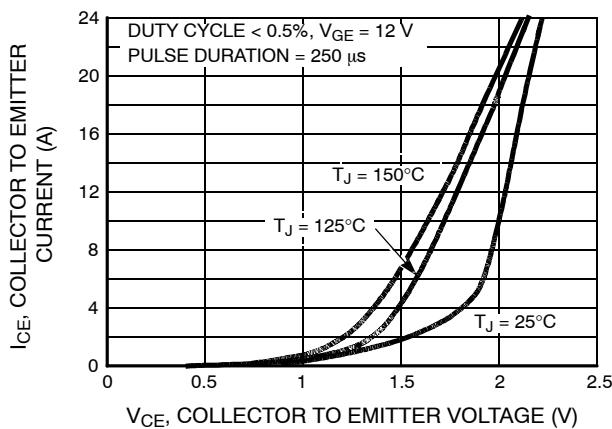


Figure 5. COLLECTOR TO EMITTER ON-STATE VOLTAGE

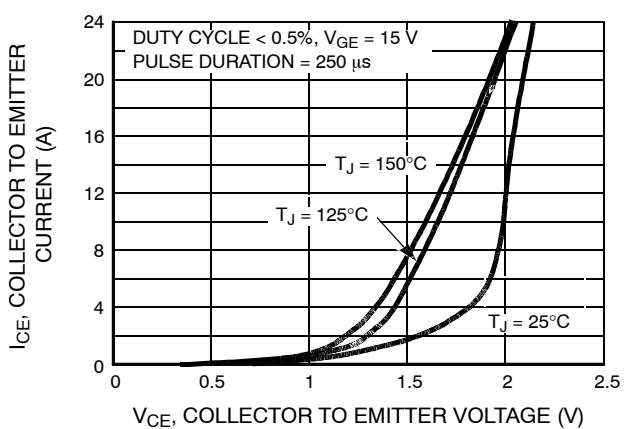


Figure 6. COLLECTOR TO EMITTER ON-STATE VOLTAGE

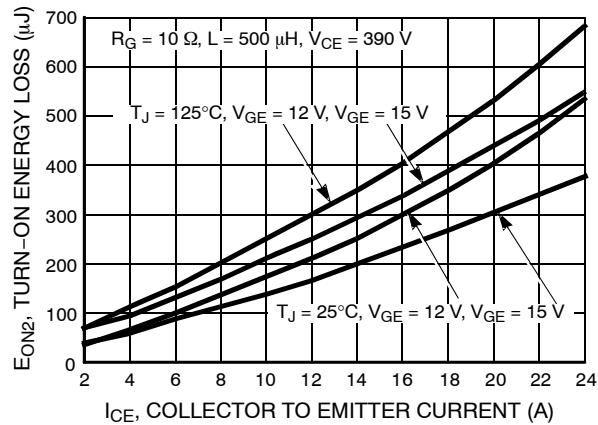


Figure 7. TURN-ON ENERGY LOSS vs. COLLECTOR TO EMITTER CURRENT

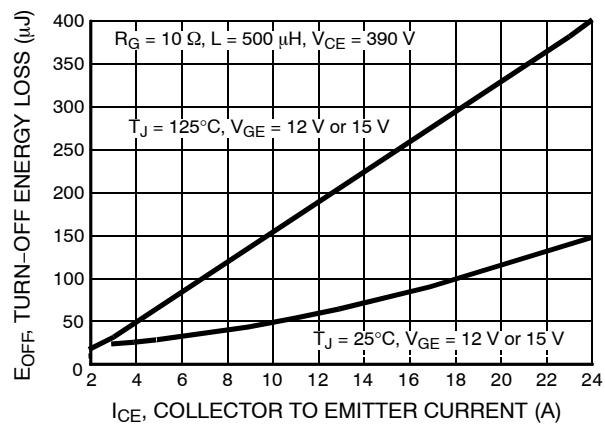


Figure 8. TURN-OFF ENERGY LOSS vs. COLLECTOR TO EMITTER CURRENT

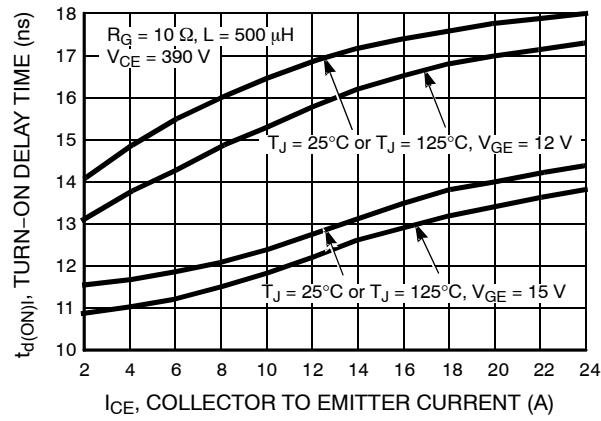


Figure 9. TURN-ON DELAY TIME vs. COLLECTOR TO EMITTER CURRENT

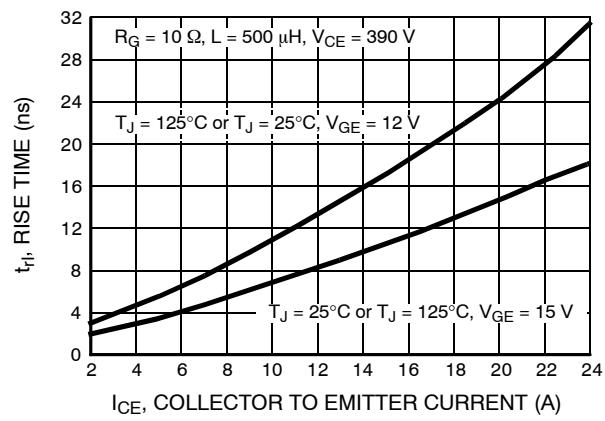


Figure 10. TURN-ON RISE TIME vs. COLLECTOR TO EMITTER CURRENT

HGTG12N60A4D, HGTP12N60A4D, HGT1S12N60A4DS

TYPICAL PERFORMANCE CURVES (unless otherwise specified) (continued)

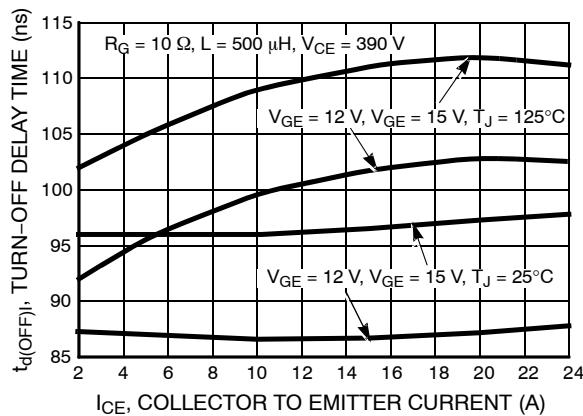


Figure 11. TURN-OFF DELAY TIME vs. COLLECTOR TO Emitter CURRENT

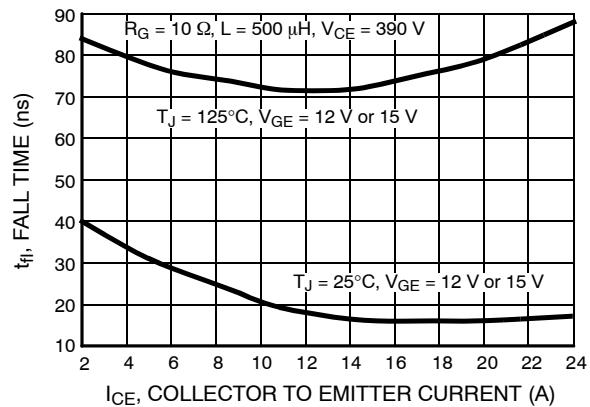


Figure 12. FALL TIME vs COLLECTOR TO Emitter CURRENT

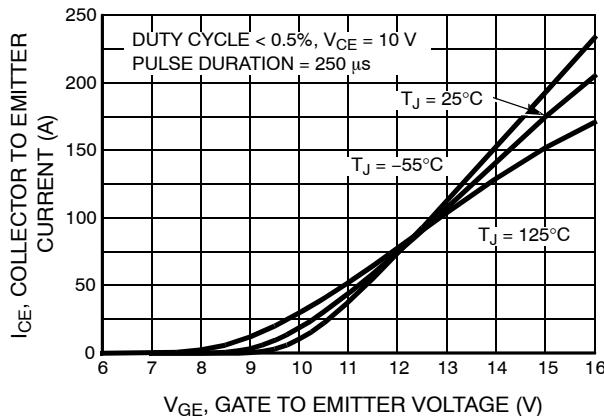


Figure 13. TRANSFER CHARACTERISTIC

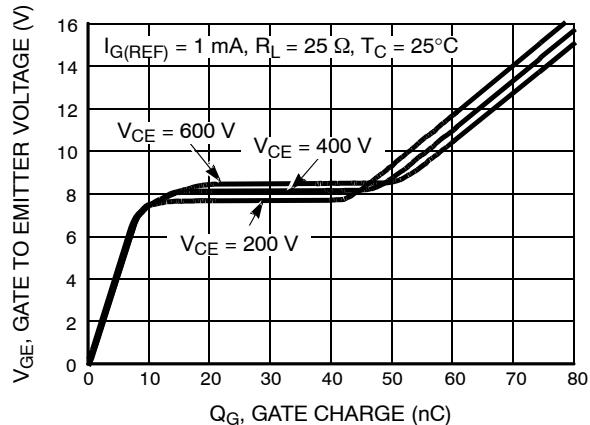


Figure 14. GATE CHARGE WAVEFORMS

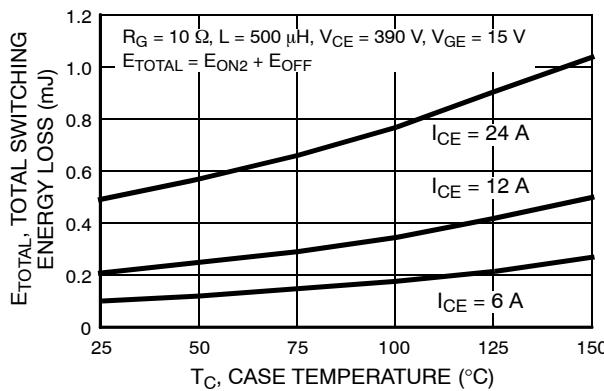


Figure 15. TOTAL SWITCHING LOSS vs. CASE TEMPERATURE

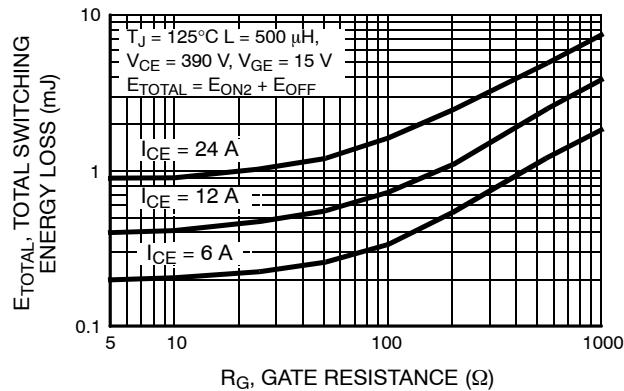


Figure 16. TOTAL SWITCHING LOSS vs. GATE RESISTANCE

TYPICAL PERFORMANCE CURVES (unless otherwise specified) (continued)

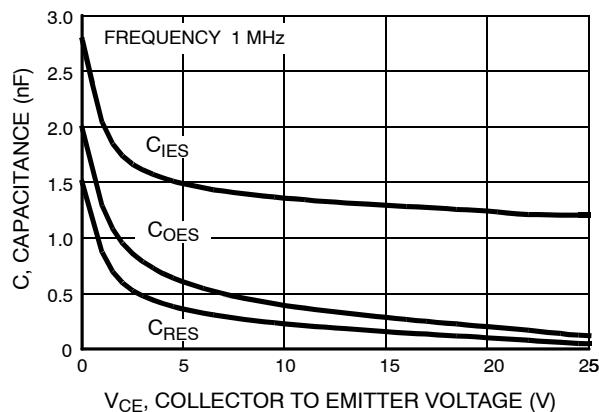


Figure 17. CAPACITANCE vs. COLLECTOR TO Emitter VOLTAGE

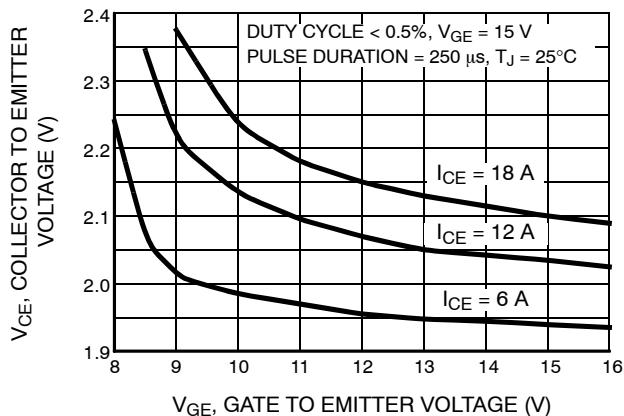


Figure 18. COLLECTOR TO Emitter ON-STATE VOLTAGE vs. GATE TO Emitter VOLTAGE

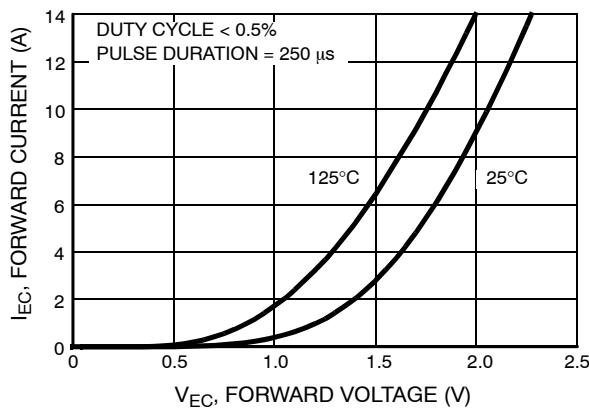


Figure 19. DIODE FORWARD CURRENT vs. FORWARD VOLTAGE DROP

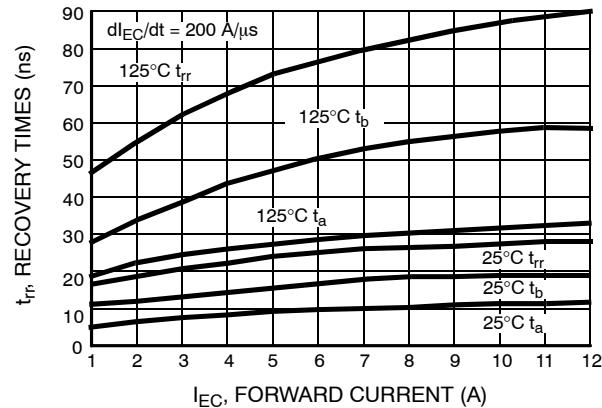


Figure 20. RECOVERYTIMES vs. FORWARD CURRENT

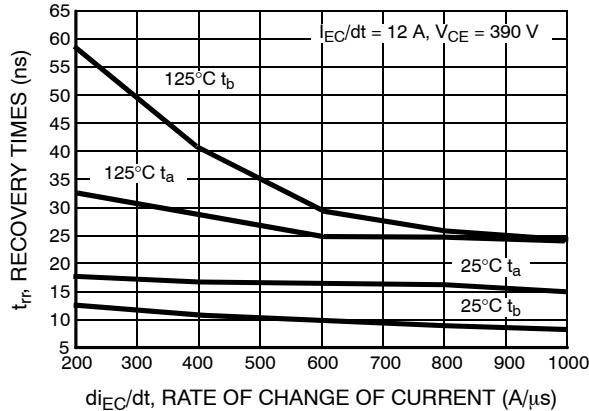


Figure 21. RECOVERY TIMES vs. RATE OF CHANGE OF CURRENT

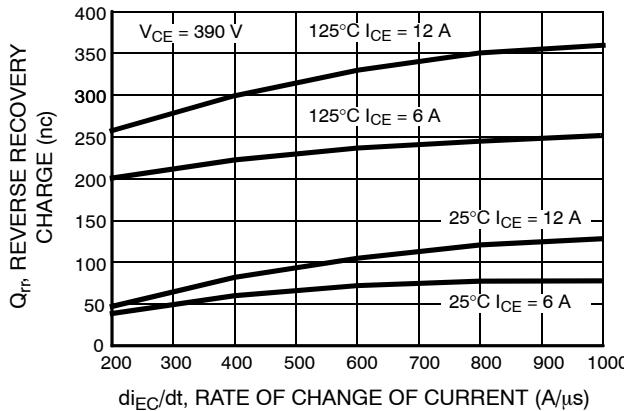


Figure 22. STORED CHARGE vs. RATE OF CHANGE OF CURRENT

TYPICAL PERFORMANCE CURVES (unless otherwise specified) (continued)

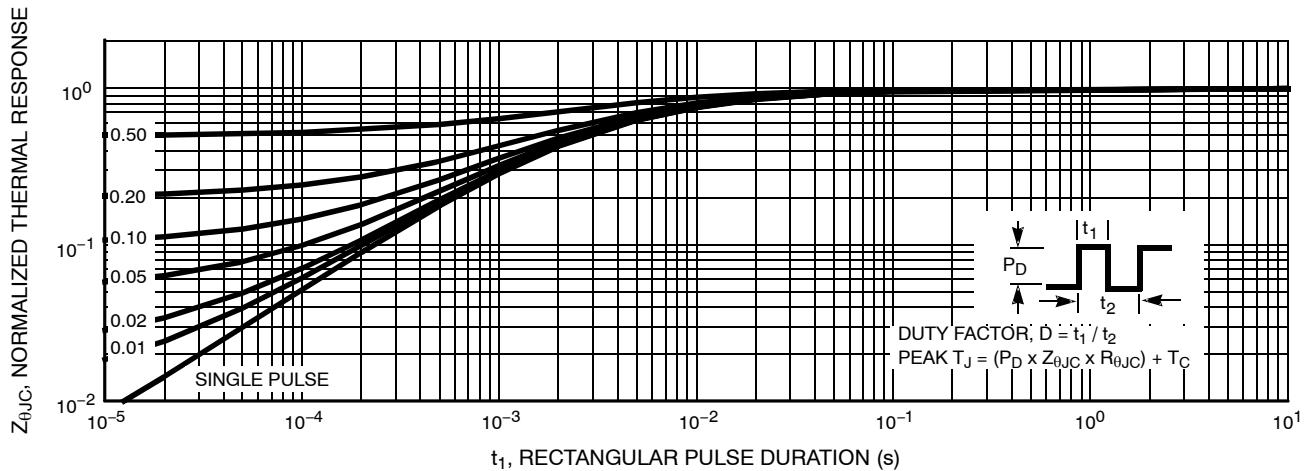


Figure 23. IGBT NORMALIZED TRANSIENT THERMAL RESPONSE, JUNCTION TO CASE

TEST CIRCUIT AND WAVEFORMS

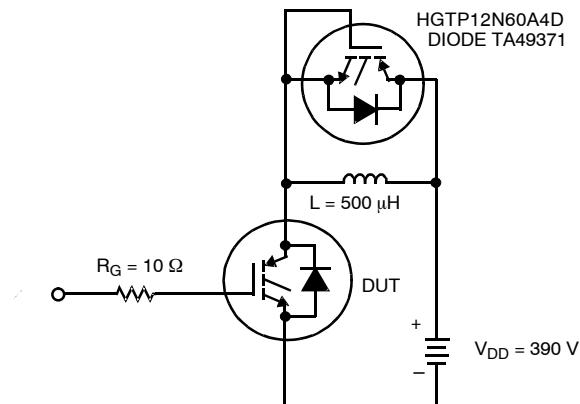


Figure 24. INDUCTIVE SWITCHING TEST CIRCUIT

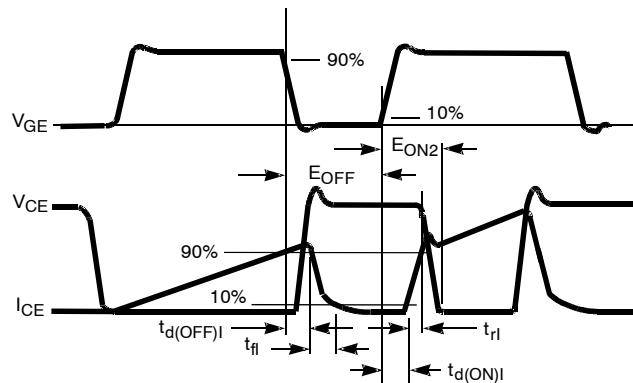


Figure 25. SWITCHING TEST WAVEFORMS

HANDLING PRECAUTIONS FOR IGBTs

Insulated Gate Bipolar Transistors are susceptible to gate-insulation damage by the electrostatic discharge of energy through the devices. When handling these devices, care should be exercised to assure that the static charge built in the handler's body capacitance is not discharged through the device. With proper handling and application procedures, however, IGBTs are currently being extensively used in production by numerous equipment manufacturers in military, industrial and consumer applications, with virtually no damage problems due to electrostatic discharge. IGBTs can be handled safely if the following basic precautions are taken:

1. Prior to assembly into a circuit, all leads should be kept shorted together either by the use of metal shorting springs or by the insertion into conductive material such as "ECCOSORBD™ LD26" or equivalent.
2. When devices are removed by hand from their carriers, the hand being used should be grounded by any suitable means – for example, with a metallic wristband.
3. Tips of soldering irons should be grounded.
4. Devices should never be inserted into or removed from circuits with power on.
5. *Gate Voltage Rating* – Never exceed the gate-voltage rating of V_{GEM} . Exceeding the rated V_{GE} can result in permanent damage to the oxide layer in the gate region.
6. *Gate Termination* – The gates of these devices are essentially capacitors. Circuits that leave the gate open-circuited or floating should be avoided. These conditions can result in turn-on of the device due to voltage buildup on the input capacitor due to leakage currents or pickup.

7. *Gate Protection* – These devices do not have an internal monolithic Zener diode from gate to emitter. If gate protection is required an external Zener is recommended.

OPERATING FREQUENCY INFORMATION

Operating frequency information for a typical device (Figure 3) is presented as a guide for estimating device performance for a specific application. Other typical frequency vs collector current (I_{CE}) plots are possible using the information shown for a typical unit in Figures 5, 6, 7, 8, 9 and 11. The operating frequency plot (Figure 3) of a typical device shows f_{MAX1} or f_{MAX2} ; whichever is smaller at each point. The information is based on measurements of a typical device and is bounded by the maximum rated junction temperature.

f_{MAX1} is defined by $f_{MAX1} = 0.05 / (t_{d(OFF)I} + t_{d(ON)I})$. Deadtime (the denominator) has been arbitrarily held to 10% of the on-state time for a 50% duty factor. Other definitions are possible. $t_{d(OFF)I}$ and $t_{d(ON)I}$ are defined in Figure 25. Device turn-off delay can establish an additional frequency limiting condition for an application other than T_{JM} . $t_{d(OFF)I}$ is important when controlling output ripple under a lightly loaded condition.

f_{MAX2} is defined by $f_{MAX2} = (P_D - P_C) / (E_{OFF} + E_{ON2})$. The allowable dissipation (P_D) is defined by $P_D = (T_{JM} - T_C) / R_{QJC}$. The sum of device switching and conduction losses must not exceed P_D . A 50% duty factor was used (Figure 3) and the conduction losses (P_C) are approximated by $P_C = (V_{CE} \times I_{CE}) / 2$.

E_{ON2} and E_{OFF} are defined in the switching waveforms shown in Figure 25. E_{ON2} is the integral of the instantaneous power loss ($I_{CE} \times V_{CE}$) during turn-on and E_{OFF} is the integral of the instantaneous power loss ($I_{CE} \times V_{CE}$) during turn-off. All tail losses are included in the calculation for E_{OFF} ; i.e., the collector current equals zero ($I_{CE} = 0$).

ORDERING INFORMATION

Part Number	Package	Brand	Shipping [†]
HGTG12N60A4D	TO-247	12N60A4D	450 Units / Tube
HGTP12N60A4D	TO-220AB	12N60A4D	800 Units / Tube
HGT1S12N60A4DS	TO-263AB	12N60A4D	800 Units / Tube


[†]For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

NOTE: When ordering, use the entire part number. Add the suffix 9A to obtain the TO-263AB variant in tape and reel, e.g. HGT1S12N60A4DS9A.

MECHANICAL CASE OUTLINE

PACKAGE DIMENSIONS


ON Semiconductor®



Scale 1:1

TO-220-3LD
CASE 340AT
ISSUE A



DATE 03 OCT 2017

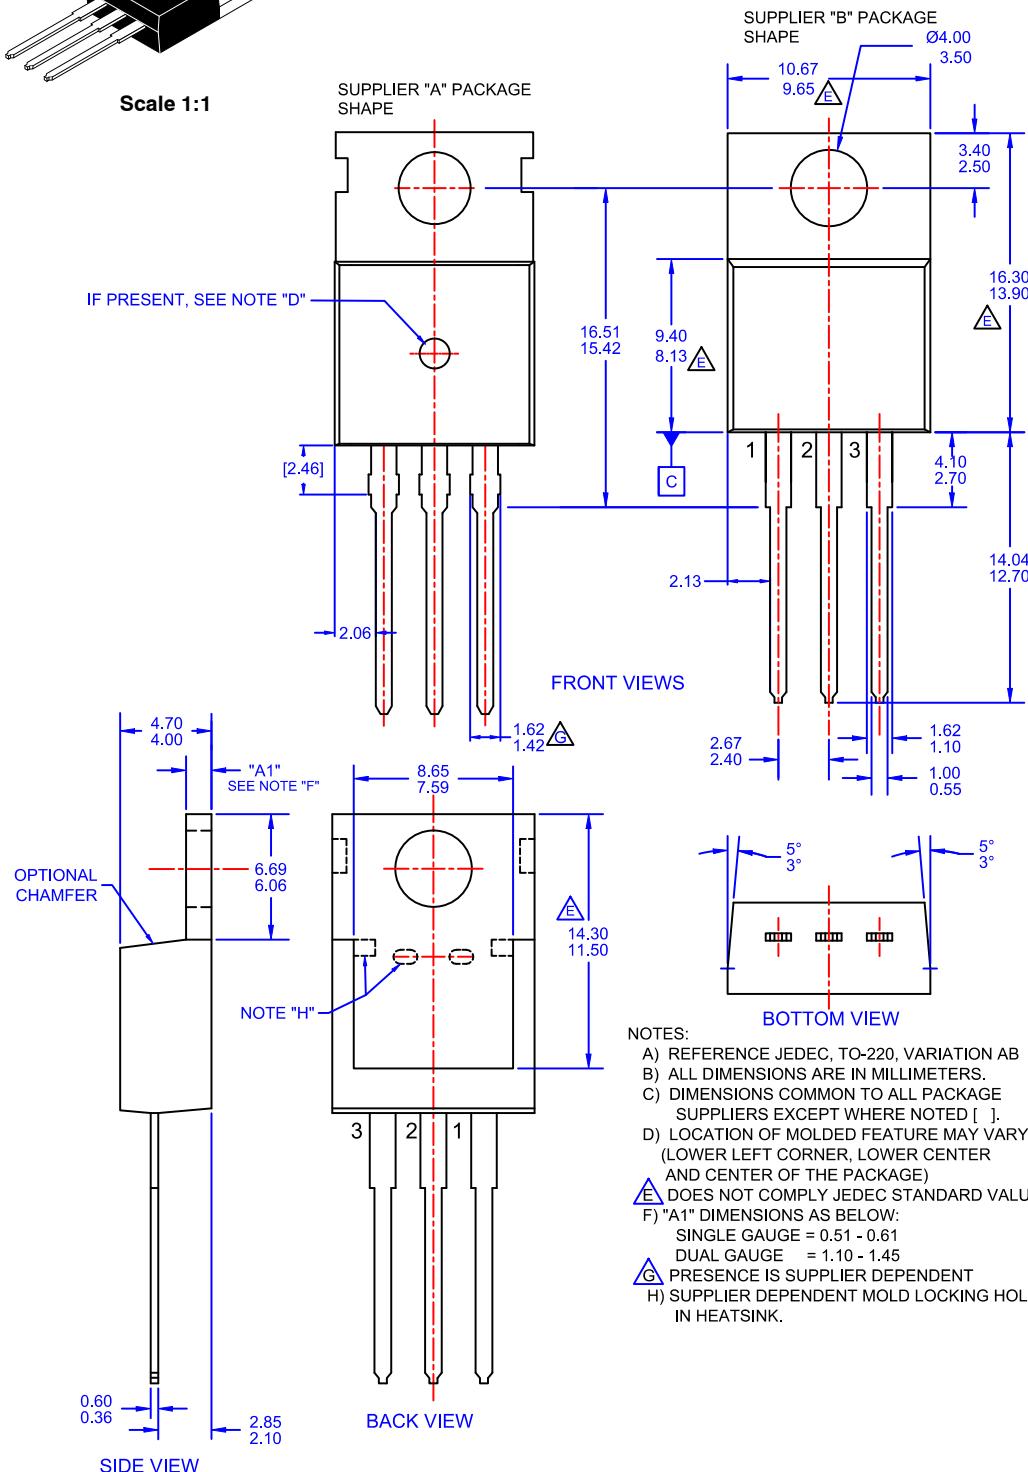

DOCUMENT NUMBER:	98AON13818G	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.
DESCRIPTION:	TO-220-3LD	PAGE 1 OF 1

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.


TO-247-3LD SHORT LEAD
CASE 340CK
ISSUE A

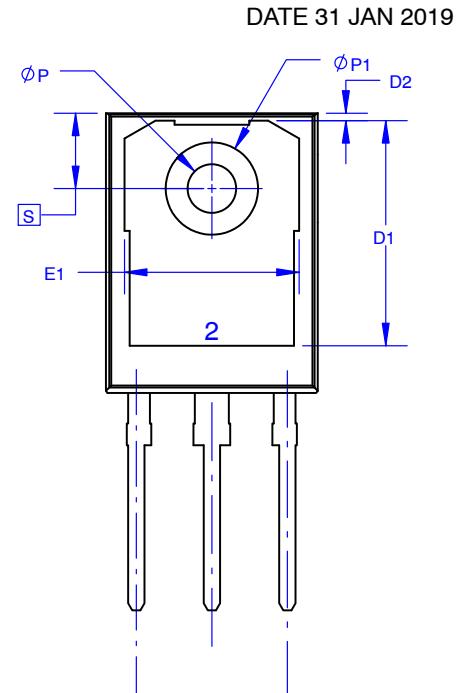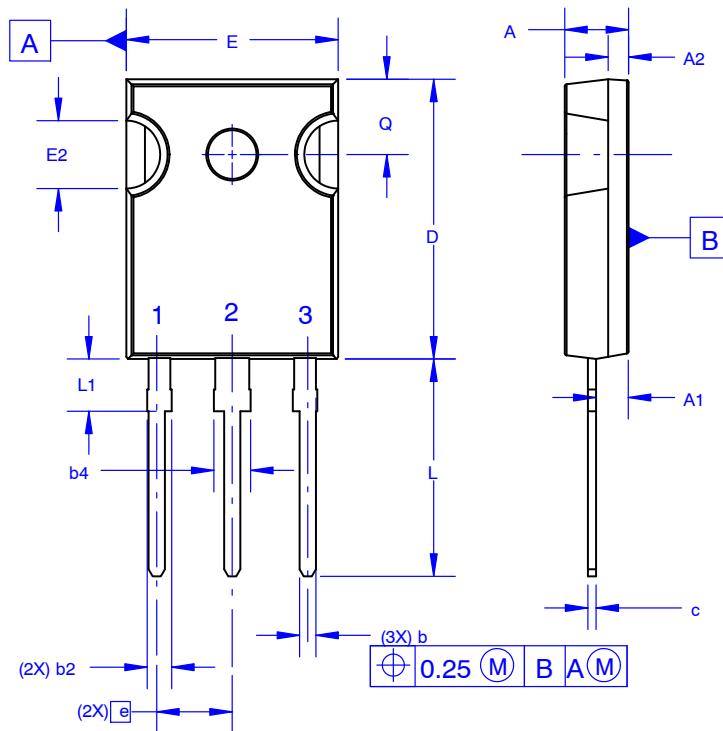

NOTES: UNLESS OTHERWISE SPECIFIED.

- A. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS.
- B. ALL DIMENSIONS ARE IN MILLIMETERS.
- C. DRAWING CONFORMS TO ASME Y14.5 - 2009.
- D. DIMENSION A1 TO BE MEASURED IN THE REGION DEFINED BY L1.
- E. LEAD FINISH IS UNCONTROLLED IN THE REGION DEFINED BY L1.

**GENERIC
MARKING DIAGRAM***



XXXX = Specific Device Code

A = Assembly Location

Y = Year

WW = Work Week

ZZ = Assembly Lot Code

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "■", may or may not be present. Some products may not follow the Generic Marking.

DIM	MILLIMETERS		
	MIN	NOM	MAX
A	4.58	4.70	4.82
A1	2.20	2.40	2.60
A2	1.40	1.50	1.60
b	1.17	1.26	1.35
b2	1.53	1.65	1.77
b4	2.42	2.54	2.66
c	0.51	0.61	0.71
D	20.32	20.57	20.82
D1	13.08	~	~
D2	0.51	0.93	1.35
E	15.37	15.62	15.87
E1	12.81	~	~
E2	4.96	5.08	5.20
e	~	5.56	~
L	15.75	16.00	16.25
L1	3.69	3.81	3.93
ØP	3.51	3.58	3.65
ØP1	6.60	6.80	7.00
Q	5.34	5.46	5.58
S	5.34	5.46	5.58

DOCUMENT NUMBER:	98AON13851G	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.
DESCRIPTION:	TO-247-3LD SHORT LEAD	PAGE 1 OF 1


ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.



SCALE 1:1

D²PAK-3 (TO-263, 3-LEAD)
CASE 418AJ
ISSUE F

DATE 11 MAR 2021



RECOMMENDED
MOUNTING FOOTPRINT

For additional information on our Pb-Free
Soldering and Mounting Process, download
the ON Semiconductor Soldering and Mounting
Techniques Reference Manual, SOLDERRM.0.

NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2009.
2. CONTROLLING DIMENSION: INCHES
3. CHAMFER OPTIONAL.
4. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED 0.005 PER SIDE. THESE DIMENSIONS ARE MEASURED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY AT DATUM H.
5. THERMAL PAD CONTOUR IS OPTIONAL WITHIN DIMENSIONS E, L1, D1, AND E1.
6. OPTIONAL MOLD FEATURE.
7. ①, ② ... OPTIONAL CONSTRUCTION FEATURE CALL OUTS.

DIM	INCHES		MILLIMETERS	
	MIN.	MAX.	MIN.	MAX.
A	0.160	0.190	4.06	4.83
A1	0.000	0.010	0.00	0.25
b	0.020	0.039	0.51	0.99
c	0.012	0.029	0.30	0.74
c2	0.045	0.065	1.14	1.65
D	0.330	0.380	8.38	9.65
D1	0.260	---	6.60	---
E	0.380	0.420	9.65	10.67
E1	0.245	---	6.22	---
e	0.100	BSC	2.54	BSC
H	0.575	0.625	14.60	15.88
L	0.070	0.110	1.78	2.79
L1	---	0.066	---	1.68
L2	---	0.070	---	1.78
L3	0.010	BSC	0.25	BSC
M	0°	8°	0°	8°

NOTE 6: 0.063 ± 0.005

NOTE 7: 0.100 ± 0.005

NOTE 8: 0.063 ± 0.005

NOTE 9: 0.063 ± 0.005

NOTE 10: 0.063 ± 0.005

NOTE 11: 0.063 ± 0.005

NOTE 12: 0.063 ± 0.005

NOTE 13: 0.063 ± 0.005

NOTE 14: 0.063 ± 0.005

NOTE 15: 0.063 ± 0.005

NOTE 16: 0.063 ± 0.005

NOTE 17: 0.063 ± 0.005

NOTE 18: 0.063 ± 0.005

NOTE 19: 0.063 ± 0.005

NOTE 20: 0.063 ± 0.005

NOTE 21: 0.063 ± 0.005

NOTE 22: 0.063 ± 0.005

NOTE 23: 0.063 ± 0.005

NOTE 24: 0.063 ± 0.005

NOTE 25: 0.063 ± 0.005

NOTE 26: 0.063 ± 0.005

NOTE 27: 0.063 ± 0.005

NOTE 28: 0.063 ± 0.005

NOTE 29: 0.063 ± 0.005

NOTE 30: 0.063 ± 0.005

NOTE 31: 0.063 ± 0.005

NOTE 32: 0.063 ± 0.005

NOTE 33: 0.063 ± 0.005

NOTE 34: 0.063 ± 0.005

NOTE 35: 0.063 ± 0.005

NOTE 36: 0.063 ± 0.005

NOTE 37: 0.063 ± 0.005

NOTE 38: 0.063 ± 0.005

NOTE 39: 0.063 ± 0.005

NOTE 40: 0.063 ± 0.005

NOTE 41: 0.063 ± 0.005

NOTE 42: 0.063 ± 0.005

NOTE 43: 0.063 ± 0.005

NOTE 44: 0.063 ± 0.005

NOTE 45: 0.063 ± 0.005

NOTE 46: 0.063 ± 0.005

NOTE 47: 0.063 ± 0.005

NOTE 48: 0.063 ± 0.005

NOTE 49: 0.063 ± 0.005

NOTE 50: 0.063 ± 0.005

NOTE 51: 0.063 ± 0.005

NOTE 52: 0.063 ± 0.005

NOTE 53: 0.063 ± 0.005

NOTE 54: 0.063 ± 0.005

NOTE 55: 0.063 ± 0.005

NOTE 56: 0.063 ± 0.005

NOTE 57: 0.063 ± 0.005

NOTE 58: 0.063 ± 0.005

NOTE 59: 0.063 ± 0.005

NOTE 60: 0.063 ± 0.005

NOTE 61: 0.063 ± 0.005

NOTE 62: 0.063 ± 0.005

NOTE 63: 0.063 ± 0.005

NOTE 64: 0.063 ± 0.005

NOTE 65: 0.063 ± 0.005

NOTE 66: 0.063 ± 0.005

NOTE 67: 0.063 ± 0.005

NOTE 68: 0.063 ± 0.005

NOTE 69: 0.063 ± 0.005

NOTE 70: 0.063 ± 0.005

NOTE 71: 0.063 ± 0.005

NOTE 72: 0.063 ± 0.005

NOTE 73: 0.063 ± 0.005

NOTE 74: 0.063 ± 0.005

NOTE 75: 0.063 ± 0.005

NOTE 76: 0.063 ± 0.005

NOTE 77: 0.063 ± 0.005

NOTE 78: 0.063 ± 0.005

NOTE 79: 0.063 ± 0.005

NOTE 80: 0.063 ± 0.005

NOTE 81: 0.063 ± 0.005

NOTE 82: 0.063 ± 0.005

NOTE 83: 0.063 ± 0.005

NOTE 84: 0.063 ± 0.005

NOTE 85: 0.063 ± 0.005

NOTE 86: 0.063 ± 0.005

NOTE 87: 0.063 ± 0.005

NOTE 88: 0.063 ± 0.005

NOTE 89: 0.063 ± 0.005

NOTE 90: 0.063 ± 0.005

NOTE 91: 0.063 ± 0.005

NOTE 92: 0.063 ± 0.005

NOTE 93: 0.063 ± 0.005

NOTE 94: 0.063 ± 0.005

NOTE 95: 0.063 ± 0.005

NOTE 96: 0.063 ± 0.005

NOTE 97: 0.063 ± 0.005

NOTE 98: 0.063 ± 0.005

NOTE 99: 0.063 ± 0.005

NOTE 100: 0.063 ± 0.005

NOTE 101: 0.063 ± 0.005

NOTE 102: 0.063 ± 0.005

NOTE 103: 0.063 ± 0.005

NOTE 104: 0.063 ± 0.005

NOTE 105: 0.063 ± 0.005

NOTE 106: 0.063 ± 0.005

NOTE 107: 0.063 ± 0.005

NOTE 108: 0.063 ± 0.005

NOTE 109: 0.063 ± 0.005

NOTE 110: 0.063 ± 0.005

NOTE 111: 0.063 ± 0.005

NOTE 112: 0.063 ± 0.005

NOTE 113: 0.063 ± 0.005

NOTE 114: 0.063 ± 0.005

NOTE 115: 0.063 ± 0.005

NOTE 116: 0.063 ± 0.005

NOTE 117: 0.063 ± 0.005

NOTE 118: 0.063 ± 0.005

NOTE 119: 0.063 ± 0.005

NOTE 120: 0.063 ± 0.005

NOTE 121: 0.063 ± 0.005

NOTE 122: 0.063 ± 0.005

NOTE 123: 0.063 ± 0.005

NOTE 124: 0.063 ± 0.005

NOTE 125: 0.063 ± 0.005

NOTE 126: 0.063 ± 0.005

NOTE 127: 0.063 ± 0.005

NOTE 128: 0.063 ± 0.005

NOTE 129: 0.063 ± 0.005

NOTE 130: 0.063 ± 0.005

NOTE 131: 0.063 ± 0.005

NOTE 132: 0.063 ± 0.005

NOTE 133: 0.063 ± 0.005

NOTE 134: 0.063 ± 0.005

NOTE 135: 0.063 ± 0.005

NOTE 136: 0.063 ± 0.005

NOTE 137: 0.063 ± 0.005

NOTE 138: 0.063 ± 0.005

NOTE 139: 0.063 ± 0.005

NOTE 140: 0.063 ± 0.005

NOTE 141: 0.063 ± 0.005

NOTE 142: 0.063 ± 0.005

NOTE 143: 0.063 ± 0.005

NOTE 144: 0.063 ± 0.005

NOTE 145: 0.063 ± 0.005

NOTE 146: 0.063 ± 0.005

NOTE 147: 0.063 ± 0.005

NOTE 148: 0.063 ± 0.005

NOTE 149: 0.063 ± 0.005

NOTE 150: 0.063 ± 0.005

NOTE 151: 0.063 ± 0.005

NOTE 152: 0.063 ± 0.005

NOTE 153: 0.063 ± 0.005

NOTE 154: 0.063 ± 0.005

NOTE 155: 0.063 ± 0.005

NOTE 156: 0.063 ± 0.005

NOTE 157: 0.063 ± 0.005

NOTE 158: 0.063 ± 0.005

NOTE 159: 0.063 ± 0.005

NOTE 160: 0.063 ± 0.005

NOTE 161: 0.063 ± 0.005

NOTE 162: 0.063 ± 0.005

NOTE 163: 0.063 ± 0.005

NOTE 164: 0.063 ± 0.005

NOTE 165: 0.063 ± 0.005

NOTE 166: 0.063 ± 0.005

NOTE 167: 0.063 ± 0.005

NOTE 168: 0.063 ± 0.005

NOTE 169: 0.063 ± 0.005

NOTE 170: 0.063 ± 0.005

NOTE 171: 0.063 ± 0.005

NOTE 172: 0.063 ± 0.005

NOTE 173: 0.063 ± 0.005

NOTE 174: 0.063 ± 0.005

NOTE 175: 0.063 ± 0.005

NOTE 176: 0.063 ± 0.005

NOTE 177: 0.063 ± 0.005

NOTE 178: 0.063 ± 0.005

NOTE 179: 0.063 ± 0.005

NOTE 180: 0.063 ± 0.005

NOTE 181: 0.063 ± 0.005

NOTE 182: 0.063 ± 0.005

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent_Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Email Requests to: orderlit@onsemi.com

ON Semiconductor Website: www.onsemi.com

TECHNICAL SUPPORT

North American Technical Support:

Voice Mail: 1 800-282-9855 Toll Free USA/Canada

Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support:

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative