




CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes



ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	2-4 @20°C	0.11 ohms ±20%
D.C. RESISTANCE	7-9 @20°C	0.30 ohms ±10%
INDUCTANCE	2-4 100kHz, 100mVAC, Ls	180uH ±10%
INDUCTANCE	7-9 100kHz, 100mVAC, Ls	95uH ±10%
DIELECTRIC	4-7 1250VAC, 1 second	1000VAC, 1 minute
URNS RATIO	(4-2):(7-9)	1.384:1, ±1%

PART MUST INSERT FULLY TO SURFACE A IN RECOMMENDED GRID * DIMENSION MAY BE EXCEEDED WITH SOLDER ONLY

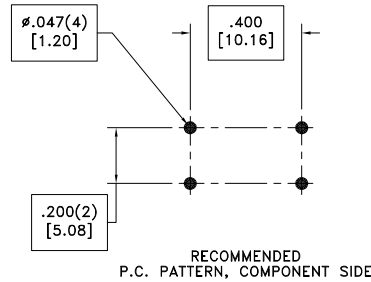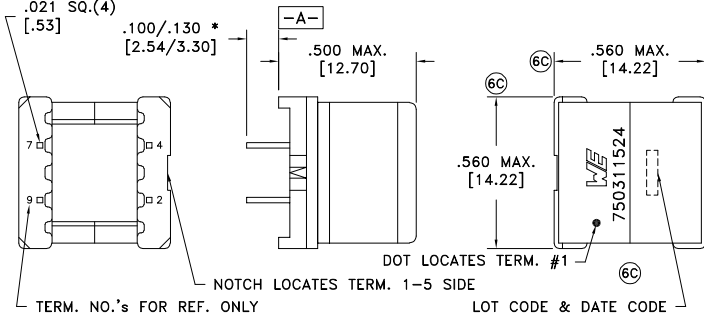

GENERAL SPECIFICATIONS:
 (6B) OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

(6C) Wire insulation & RoHS status not affected by wire color.
 Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications Method: Tray PKG-1292 www.we-online.com/midcom		Tolerances unless otherwise specified: Angles: ±1° Fractions: ±1/64 Decimals: ±.005 [1.3] Footprint: ±.001 [1.03]	DRAWING TITLE TRANSFORMER	PART NO. 750311524
6C	8/22		(6C)			
6B	12/10			This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750311524	
6A	5/10	SEE REVISION SHEET FOR REVISION LEVEL				SPECIFICATION SHEET 1 OF 1