
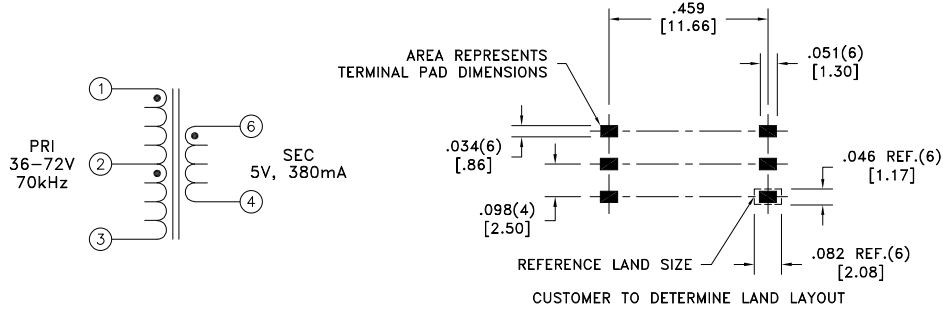


| | | |
|-------------------|------|---------------|
| CUSTOMER TERMINAL | RoHS | LEAD(Pb)-FREE |
| Sn96%, Ag4% | Yes | Yes |

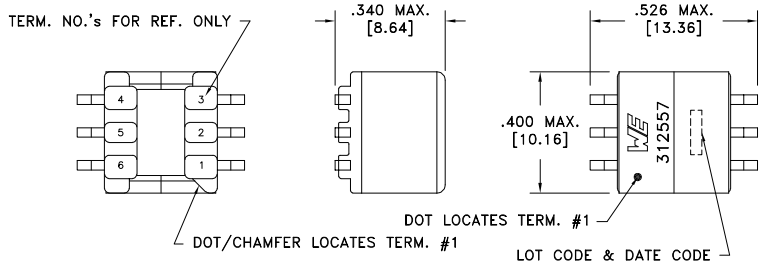

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

| PARAMETER | TEST CONDITIONS | VALUE |
|--------------------|-----------------------------------|------------------------|
| D.C. RESISTANCE | 1-3 @20°C | 0.820 ohms ±10% |
| D.C. RESISTANCE | 4-6 @20°C | 0.035 ohms ±20% |
| INDUCTANCE | 1-3 10kHz, 100mVAC, Ls | 300uH ±10% |
| SATURATION CURRENT | 20% rolloff from initial | 450mA |
| LEAKAGE INDUCTANCE | 1-3 tie(4+6), 100kHz, 100mVAC, Ls | 2.5uH typ., 5.0uH max. |
| DIELECTRIC | 1-6 1875VAC, 1 second | 1500VAC, 1 minute |
| URNS RATIO | (2-3):(1-2) | 1:1, ±1% |
| URNS RATIO | (1-3):(6-4) | 6:1, ±1% |

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Safety Standard Undefined.

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

| | | | | | | |
|------|-------|--|--|--|-------------------------------------|------------------------------|
| REV. | DATE | Packaging Specifications Method: Tape & Reel PKG-0519 www.we-online.com/midcom | | Tolerances unless otherwise specified: Angles: ±1° Fractions: ±1/64 Decimals: ±.005 [.13] Footprint: ±.005 [.13] | DRAWING TITLE TRANSFORMER | PART NO. 750312557 |
| 6B | 2/21 | | | This drawing is dual dimensioned. Dimensions in brackets are in millimeters. | eiSos p/n: 750312557 | |
| 6A | 12/12 | SEE REVISION SHEET FOR REVISION LEVEL | | | | SPECIFICATION SHEET 1 OF 1 |