

Timer relay - ETD-BL-1T-ON- 10S-SP

2917531

<https://www.phoenixcontact.com/us/products/2917531>



Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Timer relay with switch-on delay (voltage-controlled) and an adjustable time range (0.1 s - 10 s), with spring-cage connection

Product Description

Compact timer relay in 6.2 mm housing for controlling time sequences.

The time is set on the front of the device using a labeled thumbwheel, which is recessed to protect against accidental modification. A screwdriver is used to change the settings (blade width 2.5 mm).

The compact timer relays are available with different time ranges as well as with a screw, spring-cage, and push-in connection.

Your advantages

- 6.2 mm narrow design width
- High level of setting accuracy thanks to labeled and illuminated thumb wheel

Commercial Data

Item number	2917531
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to Order (non-returnable)
Sales Key	00
Product Key	CK4151
Catalog Page	Page 730 (IF-2011)
GTIN	4046356367486
Weight per Piece (including packing)	65.9 g
Weight per Piece (excluding packing)	45.4 g
Customs tariff number	85364190
Country of origin	DE

Timer relay - ETD-BL-1T-ON- 10S-SP

2917531

<https://www.phoenixcontact.com/us/products/2917531>



Technical Data

Product properties

Product type	Timer relay
Operating mode	100% operating factor
Mechanical service life	approx. 2×10^7 cycles

Insulation characteristics

Ovvovoltage category	III
Pollution degree	2
Insulation	Safe isolation

Electrical properties

Service life electrical	approx. 2×10^5 cycles at ohmic load, 1000 VA
Rated insulation voltage	300 V AC
Rated surge voltage	6 kV

Input data

Input voltage range	24 V DC (19.2 V DC ... 30 V DC)
Nominal current typ.	15 mA (Relay ON) 7 mA (Relay OFF)
Function	ON: With switch-on delay
Setting range time	0.1 s ... 10 s
Setting accuracy	$\leq 2.5\%$ (of scale end value)
Repeat accuracy	$\leq 0.5\%$ (From the measuring range final value)

Control

Control pulse length	min. 50 ms
----------------------	------------

Output data

Switching

Contact type	1 floating changeover contact
Output fuse	6.3 A (fast-blow)

Connection data

Connection method	Spring-cage connection
Stripping length	8 mm
Conductor cross section solid	0.14 mm ² ... 2.5 mm ²
Conductor cross section flexible	0.14 mm ² ... 2.5 mm ²
Conductor cross section AWG	26 ... 12

LED signaling

Status display	Green LED (POWER) Yellow LED (relay active)
----------------	------------------------------------------------

Timer relay - ETD-BL-1T-ON- 10S-SP

2917531

<https://www.phoenixcontact.com/us/products/2917531>



Dimensions

Width	6.2 mm
Height	80 mm
Depth	86 mm

Material specifications

Flammability rating according to UL 94	V0
Housing insulation material	Polyamide PA, self-extinguishing

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-20 °C ... 65 °C
Ambient temperature (storage/transport)	-25 °C ... 80 °C
Permissible humidity (operation)	15 % ... 85 %

Approval data

CE

Certificate	CE-compliant
-------------	--------------

ATEX

Identification	<input type="checkbox"/> II 3 G Ex nA nC IIC T4 Gc X
----------------	------------------------------------------------------

UL, USA / Canada

Identification	UL/C-UL Listed UL 508
----------------	-----------------------

GL

Identification	GL EMC 1 C
----------------	------------

EMC data

Low Voltage Directive	Conformance with Low Voltage Directive
Electromagnetic compatibility	Conformance with EMC directive
Noise emission	EN 61000-6-4
Note	When being exposed to interference, there may be minimal deviations.
Noise immunity	EN 61000-6-2

Standards and regulations

Standards/regulations	EN 50178
-----------------------	----------

Mounting

Assembly instructions	on standard DIN rail NS 35 in accordance with EN 60715
Mounting position	any

Timer relay - ETD-BL-1T-ON- 10S-SP


2917531

<https://www.phoenixcontact.com/us/products/2917531>



Drawings

Block diagram

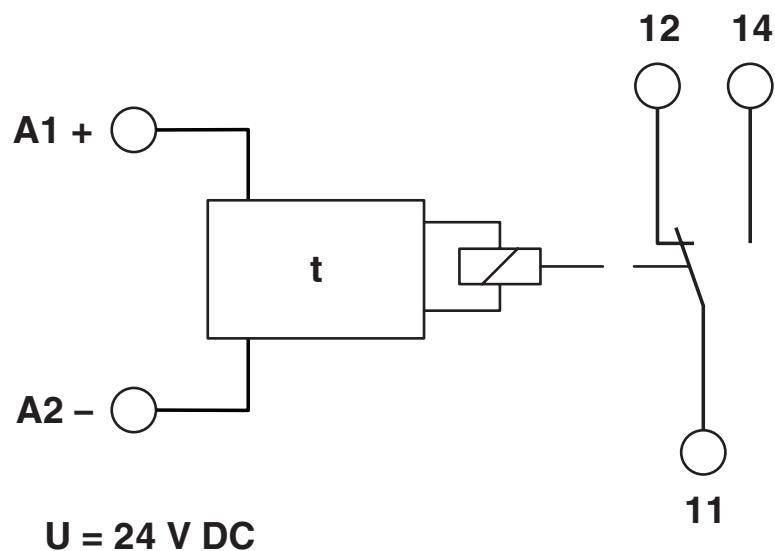

Timer relay - ETD-BL-1T-ON- 10S-SP

2917531

<https://www.phoenixcontact.com/us/products/2917531>



Classifications

ECLASS

ECLASS-9.0	27371605
ECLASS-10.0.1	27371605
ECLASS-11.0	27371605

Timer relay - ETD-BL-1T-ON- 10S-SP

2917531

<https://www.phoenixcontact.com/us/products/2917531>



Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50 years For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"
------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------

Phoenix Contact 2022 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com