

I/O module - ILB IB 24 DO32

2862369

<https://www.phoenixcontact.com/us/products/2862369>



Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.

Inline, Block IO, INTERBUS, Inline shield connector, Digital outputs: 32, 24 V DC, connection technology: 3-conductor, degree of protection: IP20, including Inline connector



Your advantages

- 32 digital outputs
- Connection of actuators in 2- and 3-conductor technology
- Nominal current per output: 500 mA
- Total current of the terminal: 16 A
- Short-circuit and overload-protected outputs
- Diagnostic and status indicators

Commercial Data

Item number	2862369
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to Order (non-returnable)
Sales Key	C21
Product Key	DRI1A1
Catalog Page	Page 164 (C-6-2019)
GTIN	4017918923846
Weight per Piece (including packing)	566.3 g
Weight per Piece (excluding packing)	510 g
Customs tariff number	85389091
Country of origin	DE

I/O module - ILB IB 24 DO32


2862369

<https://www.phoenixcontact.com/us/products/2862369>



Technical Data

Dimensions

Dimensional drawing	
Width	156 mm
Height	141 mm
Depth	57 mm
Note on dimensions	Specifications with connectors

Material specifications

Color	green
-------	-------

Interfaces

INTERBUS

Connection method	Inline shield connector
Transmission speed	500 kbps

Output data

Digital

Output name	Digital outputs
Connection method	Spring-cage connection
Connection technology	3-conductor
Number of outputs	32
Protective circuit	Short-circuit and overload protection
Output voltage	24 V DC
Maximum output current per channel	500 mA
Maximum output current per module / terminal block	16 A
Maximum output current per module	16 A
Nominal output voltage	24 V DC
Nominal load, inductive	12 VA
Nominal load, lamp	12 W
Nominal load, ohmic	12 W

Product properties

Type	Block design
Product type	I/O component
Scope of delivery	including Inline connector

No. of channels	32
-----------------	----

Electrical properties

No. of channels	32
-----------------	----

Potentials: Communications power (U_L)

Supply voltage	24 V DC
Supply voltage range	19.2 V DC ... 30 V DC (including all tolerances, including ripple)
	max. 8 A
Current draw	85 mA

Potentials: Power supply to the actuator (U_{A1})

Supply voltage	24 V DC
Supply voltage range	19.2 V DC ... 30 V DC (including all tolerances, including ripple)
	max. 8 A
Current draw	4 A

Potentials: Power supply to the actuator (U_{A2})

Supply voltage	24 V DC
Supply voltage range	19.2 V DC ... 30 V DC (including all tolerances, including ripple)
	max. 8 A
Current draw	4 A

Potentials: Power supply to the actuator (U_{A3})

Supply voltage	24 V DC
Supply voltage range	19.2 V DC ... 30 V DC (including all tolerances, including ripple)
	max. 8 A
Current draw	4 A

Potentials: Power supply to the actuator (U_{A4})

Supply voltage	24 V DC
Supply voltage range	19.2 V DC ... 30 V DC (including all tolerances, including ripple)
	max. 8 A
Current draw	4 A

Potentials

	max. 8 A
Current draw	85 mA

Connection data

Connection technology

Connection name	Inline connector
-----------------	------------------

Conductor connection

Connection method	Spring-cage connection
Conductor cross section solid	0.08 mm ² ... 1.5 mm ²
Conductor cross section flexible	0.08 mm ² ... 1.5 mm ²

I/O module - ILB IB 24 DO32



2862369

<https://www.phoenixcontact.com/us/products/2862369>

Conductor cross section AWG	28 ... 16
Stripping length	8 mm

Inline connector

Connection method	Spring-cage connection
Conductor cross section, rigid	0.08 mm ² ... 1.5 mm ²
Conductor cross section, flexible	0.08 mm ² ... 1.5 mm ²
Conductor cross section AWG	28 ... 16
Stripping length	8 mm

Ambient conditions

Ambient temperature (operation)	-25 °C ... 60 °C
Degree of protection	IP20
Air pressure (operation)	80 kPa ... 108 kPa (up to 2000 m above sea level)
Air pressure (storage/transport)	66 kPa ... 108 kPa (up to 3500 m above sea level)
Ambient temperature (storage/transport)	-25 °C ... 85 °C
Permissible humidity (operation)	max. 85 % (non-condensing)
Permissible humidity (storage/transport)	95 % (non-condensing)

Standards and regulations


Protection class	III (IEC 61140, EN 61140, VDE 0140-1)
Noise emission	Class B (residential)

Mounting

Mounting type	DIN rail mounting
---------------	-------------------


Drawings

Dimensional drawing

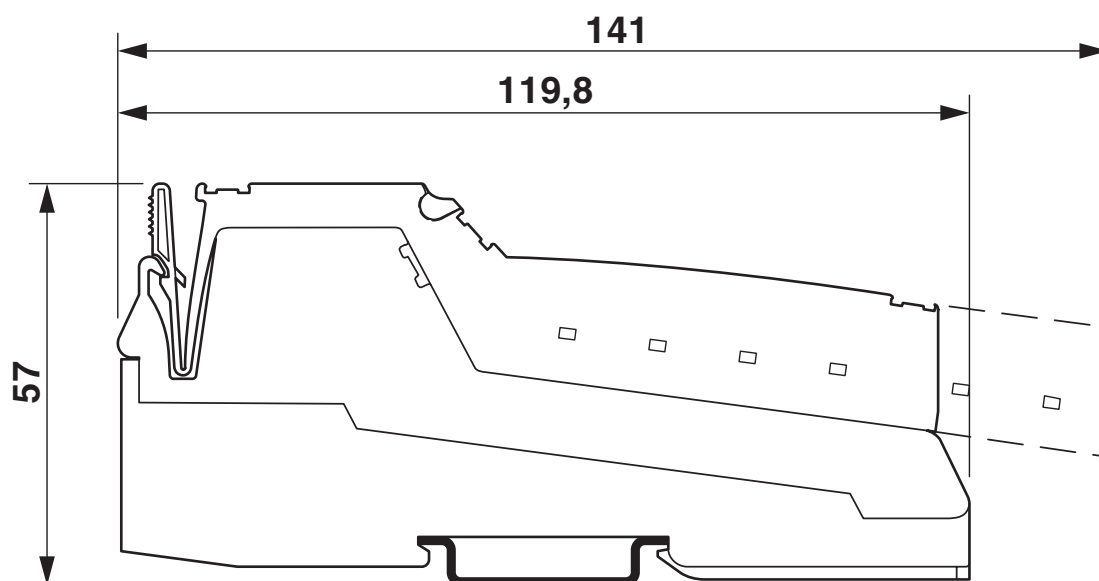

The figure shows the general dimensional drawing of the Inline Block IO product family

Connection diagram

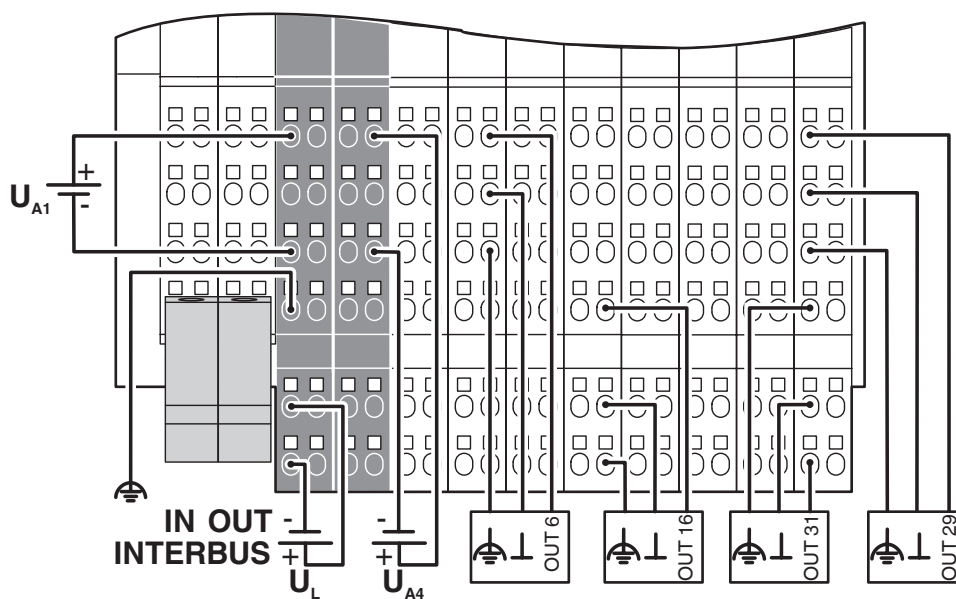

I/O module - ILB IB 24 DO32

2862369

<https://www.phoenixcontact.com/us/products/2862369>



Approvals



cUL Recognized
Approval ID: FILE E 140324



UL Recognized
Approval ID: FILE E 140324

INTERBUS CLUB
Approval ID: 428/06.04.04



cUL Listed
Approval ID: FILE E 199827



UL Listed
Approval ID: FILE E 199827

cULus Recognized

cULus Listed

I/O module - ILB IB 24 DO32

2862369

<https://www.phoenixcontact.com/us/products/2862369>



Classifications

ECLASS

ECLASS-9.0	27242604
ECLASS-10.0.1	27242604
ECLASS-11.0	27242604

ETIM

ETIM 8.0	EC001599
----------	----------

UNSPSC

UNSPSC 21.0	32151600
-------------	----------

I/O module - ILB IB 24 DO32

2862369

<https://www.phoenixcontact.com/us/products/2862369>



Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

I/O module - ILB IB 24 DO32

2862369

<https://www.phoenixcontact.com/us/products/2862369>



Accessories

Inline connector

Inline connector - ILB SCN-12-PWR IN-CP - 2863164

<https://www.phoenixcontact.com/us/products/2863164>

Long power connector, color coded, for Inline Block IO



Inline connector

Inline connector - IB IL SCN-12-OCP - 2727624

<https://www.phoenixcontact.com/us/products/2727624>

Connector, colored identification, for digital 4, or 16-channel Inline output terminal blocks



I/O module - ILB IB 24 DO32

2862369

<https://www.phoenixcontact.com/us/products/2862369>



Inline shield connector

Inline shield connector - IB IL SCN-6 SHIELD-CP - 2863151

<https://www.phoenixcontact.com/us/products/2863151>

Shield connector, for INTERBUS connection



End clamp

End clamp - CLIPFIX 35-5 - 3022276

<https://www.phoenixcontact.com/us/products/3022276>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

I/O module - ILB IB 24 DO32

2862369

<https://www.phoenixcontact.com/us/products/2862369>



Labeling field

Labeling field - IB IL FIELD 2 - 2727501

<https://www.phoenixcontact.com/us/products/2727501>

Labeling field, width: 12.2 mm



Insert strip

Insert strip - ESL 62X10 - 0809492

<https://www.phoenixcontact.com/us/products/0809492>

Insert strip, Sheet, white, unlabeled, can be labeled with: Office printing systems:
Laser printer, mounting type: insert, lettering field size: 62 x 10 mm, Number of
individual labels: 72



I/O module - ILB IB 24 DO32

2862369

<https://www.phoenixcontact.com/us/products/2862369>



Flat zack marker sheet

Flat zack marker sheet - ZBFM 6/WH:UNBEDRUCKT - 0803618

<https://www.phoenixcontact.com/us/products/0803618>

Flat zack marker sheet, Sheet, white, unlabeled, can be labeled with: CMS-P1-PLOTTER, PLOTMARK, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5 x 5.5 mm, Number of individual labels: 100



Phoenix Contact 2022 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com