

Limit value switches - MCR-SWS-U

2766465

<https://www.phoenixcontact.com/us/products/2766465>



Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



MCR threshold value switches, with adjustable hysteresis and relay/transistor output, input signal 0..10 V

Your advantages

- Adjustable hysteresis
- Monitoring of three signal states
- Relay/transistor output
- Limit value indication
- 0 ... 10 V or 0 ... 20 mA input

Commercial Data

Item number	2766465
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to Order (non-returnable)
Sales Key	C01
Product Key	CK1843
Catalog Page	Page 147 (C-7-2013)
GTIN	4017918066710
Weight per Piece (including packing)	150 g
Weight per Piece (excluding packing)	124.7 g
Customs tariff number	85437090
Country of origin	DE

Technical Data

Notes

Utilization restriction

EMC note	EMC: class A product, see manufacturer's declaration in the download area
----------	---

Product properties

Product type	Threshold value switch
No. of channels	1

Electrical properties

No. of channels	1
Step response (10-90%)	< 25 ms
Maximum temperature coefficient	≤ 0.02 %/K

Supply

Supply voltage range	20 V DC ... 30 V DC
Max. current consumption	typ. 60 mA

Input data

Signal:

Description of the input	Voltage input
Voltage input signal	0 V ... 10 V
Max. voltage input signal	11 V
Input resistance of voltage input	≥ 100 kΩ
Min setting range of the voltage threshold value	0 V ... 10 V
Setting range of the voltage hysteresis	0.1 V ... 10 V (setting accuracy: ± 30 mV)
Internal voltage hysteresis	± 30 mV (around the lower/upper switching point)
Setting option	Setting potentiometer, scaled 270° potentiometer

Output data

Switching: Transistor

Number of outputs	3
Continuous load current	100 mA
Output voltage range	20 V DC ... 30 V DC

Switching: Relay

Contact type	1 changeover contact
Contact material	AgNi 0,15 + HTV (hard gold-plated)
Maximum switching voltage	250 V AC (30 V DC)
Max. switching current	2 A
Mechanical service life	10 ⁷ cycles

Limit value switches - MCR-SWS-U

2766465

<https://www.phoenixcontact.com/us/products/2766465>




Status display	LED
----------------	-----

Connection data

Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross section solid	0.2 mm ² ... 2.5 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	24 ... 14

Dimensions

Dimensional drawing	
Width	17.5 mm
Height	99 mm
Depth	114.5 mm

Material specifications

Housing material	Polyamide PA non-reinforced
------------------	-----------------------------

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-20 °C ... 65 °C
---------------------------------	------------------

Approval data

CE

Certificate	CE-compliant
-------------	--------------

UL, USA / Canada

Identification	UL 508 Recognized
----------------	-------------------

Mounting

Mounting type	DIN rail mounting
Mounting position	any

Limit value switches - MCR-SWS-U


2766465

<https://www.phoenixcontact.com/us/products/2766465>




Drawings

Circuit diagram

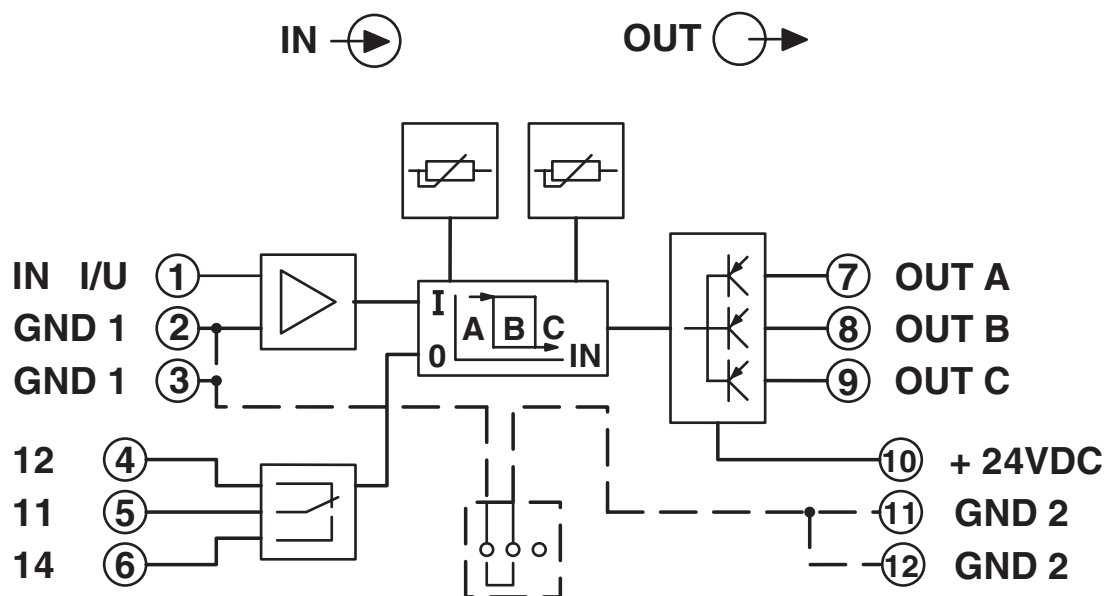

Dimensional drawing

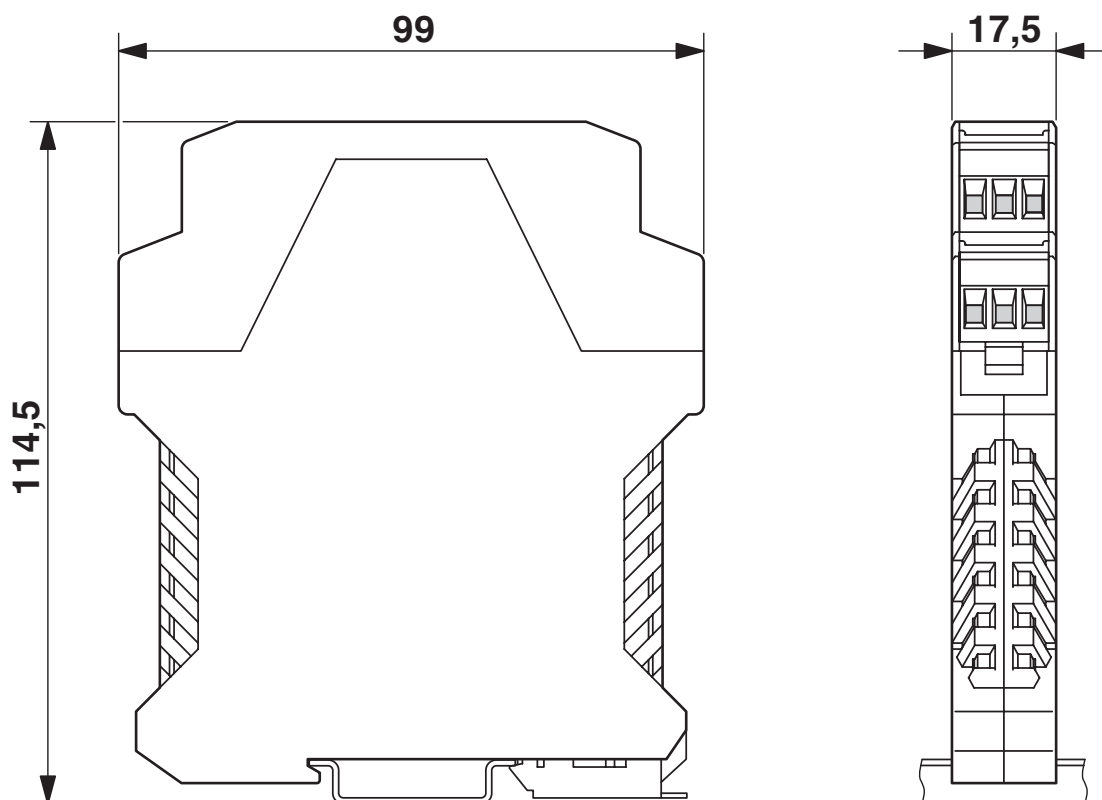

Limit value switches - MCR-SWS-U



2766465

<https://www.phoenixcontact.com/us/products/2766465>

Classifications

ECLASS

ECLASS-9.0	27210120
ECLASS-10.0.1	27210120
ECLASS-11.0	27210120

Phoenix Contact 2022 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com