

Limit value switches - MCR-SPP-I-4



2810049

<https://www.phoenixcontact.com/us/products/2810049>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.

MCR threshold value switches, with hysteresis and relay, input signal 4..20 mA



Commercial Data

Item number	2810049
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to Order (non-returnable)
Sales Key	C01
Product Key	CK1843
Catalog Page	Page 349 (IF-2007)
GTIN	4017918076573
Weight per Piece (including packing)	117.8 g
Weight per Piece (excluding packing)	117.8 g
Customs tariff number	85389091
Country of origin	DE

Limit value switches - MCR-SPP-I-4



2810049

<https://www.phoenixcontact.com/us/products/2810049>

Technical Data

Notes

Utilization restriction

EMC note	EMC: class A product, see manufacturer's declaration in the download area
----------	---

Product properties

Product type	Threshold value switch
No. of channels	1

Electrical properties

No. of channels	1
Electrical isolation between input and output	No
Step response (10-90%)	□ 2 ms
Maximum temperature coefficient	≤ 0.01 %/K

Input data

Signal:

Description of the input	Current input
Current input signal	4 mA ... 20 mA
Voltage dissipation	approx. 7 V (6.7 V ... 7.5 V)
Min setting range of the current threshold value	4 mA ... 20 mA
Setting range of the current hysteresis	0.1 mA ... 1 mA
Internal current hysteresis	± 60 µA (around the lower/upper switching point)

Output data

Switching: Relay

Contact type	1 changeover contact
Contact material	Rhodium
Maximum switching voltage	150 V DC 125 V AC
Max. switching current	1 A
Interrupting rating (ohmic load) max.	30 W (with DC) 60 VA (with AC)
Mechanical service life	< 10 ⁹ cycles
Status display	LED

Connection data

Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross section solid	0.2 mm ² ... 2.5 mm ²

Limit value switches - MCR-SPP-I-4




2810049

<https://www.phoenixcontact.com/us/products/2810049>

Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	24 ... 14

Dimensions

Dimensional drawing	
Width	22.5 mm
Height	75 mm
Depth	110 mm

Material specifications

Housing material	ABS
------------------	-----

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-20 °C ... 65 °C
Ambient temperature (storage/transport)	-20 °C ... 65 °C

Approval data

CE

Certificate	CE-compliant
-------------	--------------

Mounting

Mounting type	DIN rail mounting
Mounting position	any

Limit value switches - MCR-SPP-I-4


2810049

<https://www.phoenixcontact.com/us/products/2810049>




Drawings

Application drawing

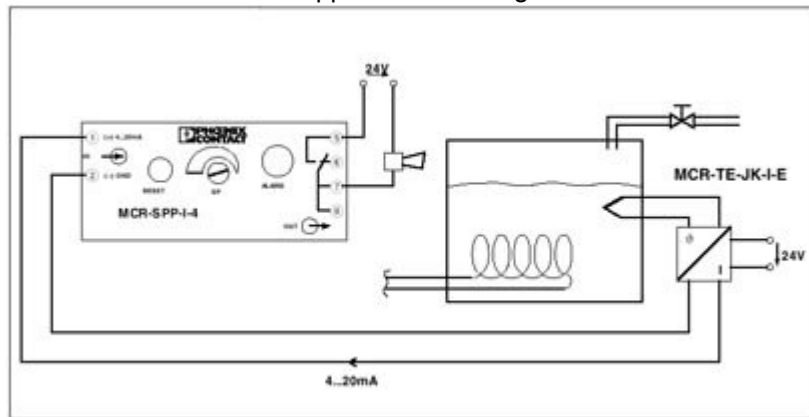

Application example: temperature control

Dimensional drawing

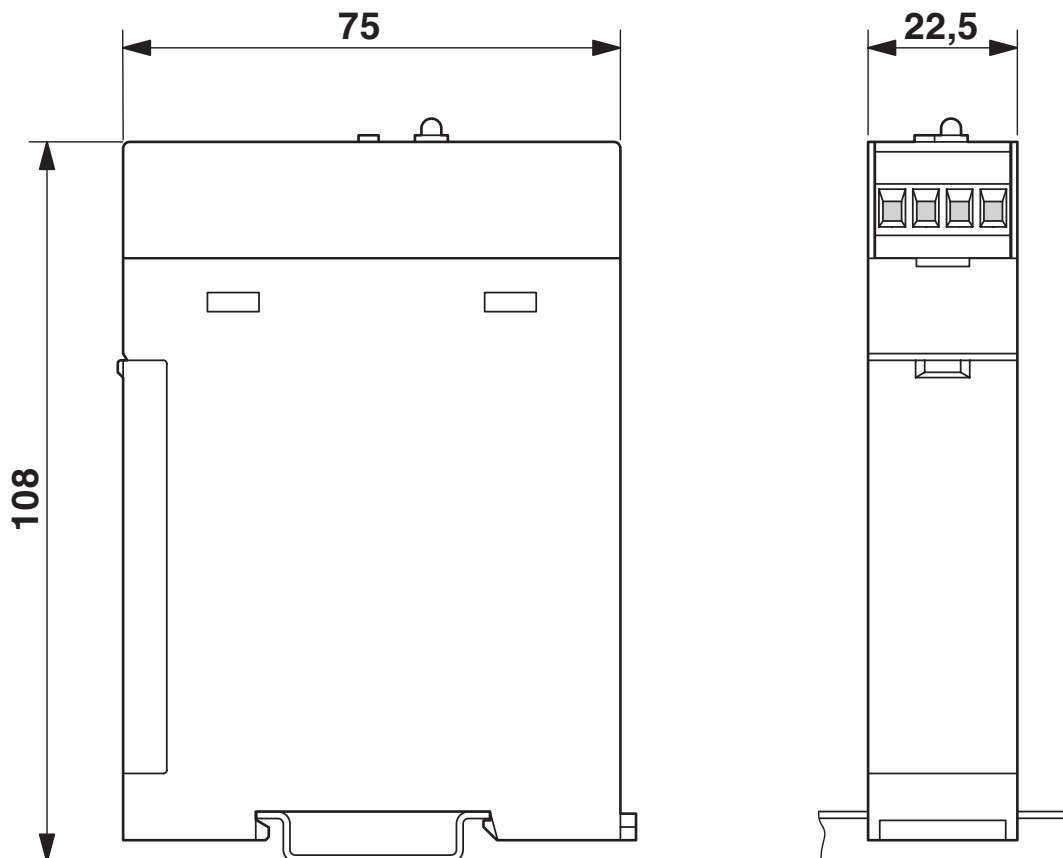


Limit value switches - MCR-SPP-I-4

2810049

<https://www.phoenixcontact.com/us/products/2810049>



Circuit diagram

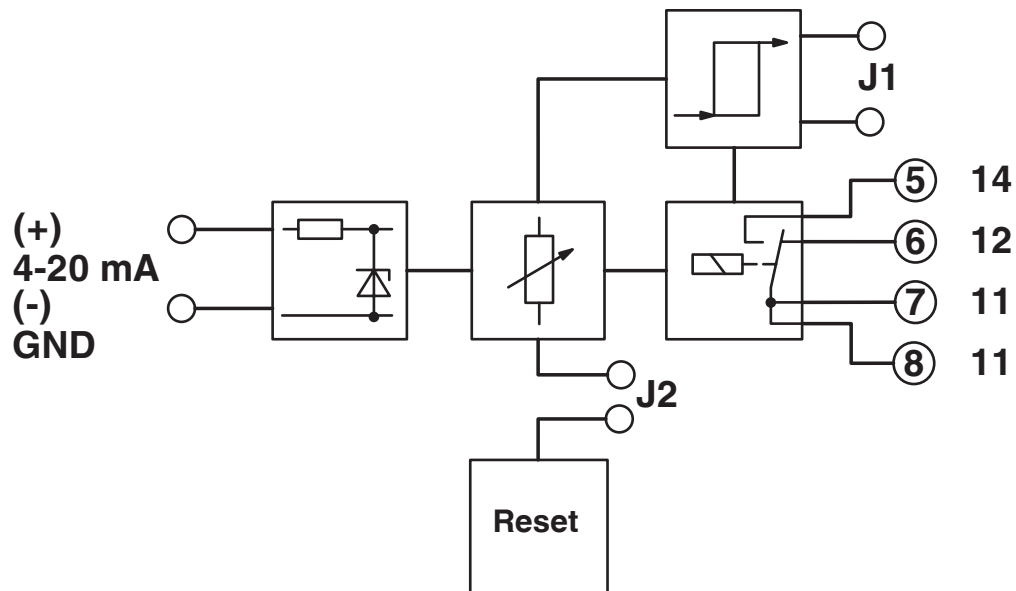

Limit value switches - MCR-SPP-I-4



2810049

<https://www.phoenixcontact.com/us/products/2810049>

Classifications

ECLASS

ECLASS-9.0	27210120
ECLASS-10.0.1	27210120
ECLASS-11.0	27210120

Phoenix Contact 2022 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com