

Repeater power supply - MINI MCR-SL-RPS-I-I-SP



2864752

<https://www.phoenixcontact.com/us/products/2864752>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



MCR repeater power supply, with spring-cage connection, input signal: (0)4...20 mA, output signal: (0)4...20 mA. Replacement part: 2902015 MINI MCR-2-RPSS-I-I-PT.

Your advantages

- Power supply possible via the foot element (TBUS)
- Can be used as an isolator with passive input
- 3-way isolation
- Supply of 2-conductor and passive 3-conductor sensors
- Highly-compact repeater power supplies for electrical isolation, amplification, and filtering of standard analog signals

Commercial Data

Item number	2864752
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to Order (non-returnable)
Sales Key	C01
Product Key	CK1211
Catalog Page	Page 99 (C-7-2015)
GTIN	4017918974954
Weight per Piece (including packing)	82.18 g
Weight per Piece (excluding packing)	79.4 g
Customs tariff number	85437090
Country of origin	DE

Repeater power supply - MINI MCR-SL-RPS-I-I-SP



2864752

<https://www.phoenixcontact.com/us/products/2864752>

Technical Data

Product properties

Product type	Repeater power supplies
No. of channels	1

Insulation characteristics

Overvoltage category	II
Pollution degree	2

Electrical properties

No. of channels	1
Rated insulation voltage	50 V AC/DC
Electrical isolation	Basic insulation in accordance with EN 61010
Electrical isolation between input and output	yes
Limit frequency (3 dB)	approx. 100 Hz
Maximum power dissipation for nominal condition	508 mW (24 V DC)
	208 mW (24 V DC)
Test voltage, input/output/supply	1.5 kV AC (50 Hz, 60 s)
Protective circuit	Transient protection
Signal transmission behavior	In = Out
Step response (10-90%)	approx. 3.5 ms
Maximum temperature coefficient	< 0.01 %/K
Temperature coefficient, typical	< 0.002 %/K
Maximum transmission error	≤ 0.2 % (of final value)
Transmission error, typical	≤ 0.1 % (of final value)

Supply

Nominal supply voltage	24 V DC
Supply voltage range	19.2 V DC ... 30 V DC (The DIN rail connector (ME 6,2 TBUS-2 1,5/5-ST-3,81 GN, item no. 2869728) can be used to bridge the supply voltage. It can be snapped onto a 35 mm DIN rail in accordance with EN 60715)
Power consumption	< 900 mW (at 24 V DC and in repeater power supply operation)
	< 600 mW (at 24 V DC and in isolator operation)

Input data

Signal:

Description of the input	Current input (sensor circuit)
Number of inputs	1
Current input signal	4 mA ... 20 mA (repeater power supply and isolator operation)
	0 mA ... 20 mA (isolator operation)
Max. current input signal	28 mA
Input resistance current input	approx. 50 Ω
Transmitter supply voltage	U _B - max. 4.5 V for load 0 mA ... 20 mA

Repeater power supply - MINI MCR-SL-RPS-I-I-SP



2864752

<https://www.phoenixcontact.com/us/products/2864752>

Transmitter supply voltage range	14.7 V DC ... 25.5 V DC
----------------------------------	-------------------------

Output data

Signal: Current

Number of outputs	1
Non-load voltage	approx. 12.5 V
Current output signal	0 mA ... 20 mA (isolator operation) 4 mA ... 20 mA (repeater power supply and isolator operation)
Max. current output signal	28 mA
Load/output load current output	$\leq 500 \Omega$ ($I = 20 \text{ mA}$)
Ripple	$< 20 \text{ mV}_{\text{rms}}$ (at 500Ω)

Connection data


Connection method	Spring-cage connection
Stripping length	8 mm
Conductor cross section solid	$0.2 \text{ mm}^2 \dots 2.5 \text{ mm}^2$
Conductor cross section flexible	$0.2 \text{ mm}^2 \dots 2.5 \text{ mm}^2$
Conductor cross section AWG	24 ... 12

Interfaces

Data communication (bypass)

HART function	no
---------------	----

Dimensions

Dimensional drawing	
Width	6.2 mm
Height	93.1 mm
Depth	102.5 mm

Material specifications

Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 2
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 2
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 2
Housing material	PBT

Environmental and real-life conditions

Ambient conditions

Repeater power supply - MINI MCR-SL-RPS-I-I-SP



2864752

<https://www.phoenixcontact.com/us/products/2864752>

Degree of protection	IP20
Ambient temperature (operation)	-20 °C ... 60 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C

Approval data

CE

Certificate	CE-compliant
-------------	--------------

ATEX

Identification	□ II 3 G Ex nA IIC T4 Gc X
----------------	----------------------------

UL, USA / Canada

Identification	UL 508 Recognized
	Class I, Div. 2, Groups A, B, C, D T5

GL

Identification	GL EMC 2 D
----------------	------------

EMC data

Electromagnetic compatibility	Conformance with EMC directive
Noise emission	EN 50081-2
Noise immunity	EN 61000-6-2
Note	When being exposed to interference, there may be minimal deviations.

Electrostatic discharge

Standards/regulations	EN 61000-4-2
-----------------------	--------------

Electrostatic discharge

Comments	Safety measures must be taken to prevent electrostatic discharge.
----------	---

Electromagnetic HF field

Designation	Electromagnetic RF field
Standards/regulations	EN 61000-4-3
Typical deviation from the measuring range final value	10 %

Fast transients (burst)

Designation	Fast transients (burst)
Standards/regulations	EN 61000-4-4
Typical deviation from the measuring range final value	10 %

Surge current load (surge)

Standards/regulations	EN 61000-4-5
-----------------------	--------------

Surge current load (surge)

Comments	Criterion B
----------	-------------

Conducted interference

Repeater power supply - MINI MCR-SL-RPS-I-I-SP



2864752

<https://www.phoenixcontact.com/us/products/2864752>

Designation	Conducted interferences
Standards/regulations	EN 61000-4-6
Typical deviation from the measuring range final value	10 %

Standards and regulations

Electrical isolation	Basic insulation in accordance with EN 61010
----------------------	--

Mounting

Mounting type	DIN rail mounting
Assembly instructions	The DIN rail connector (ME 6,2 TBUS-2 1,5/5-ST-3,81 GN, item no. 2869728) can be used to bridge the supply voltage. It can be snapped onto a 35 mm DIN rail in accordance with EN 60715.
Mounting position	any

Repeater power supply - MINI MCR-SL-RPS-I-I-SP




2864752

<https://www.phoenixcontact.com/us/products/2864752>

Drawings

Application drawing

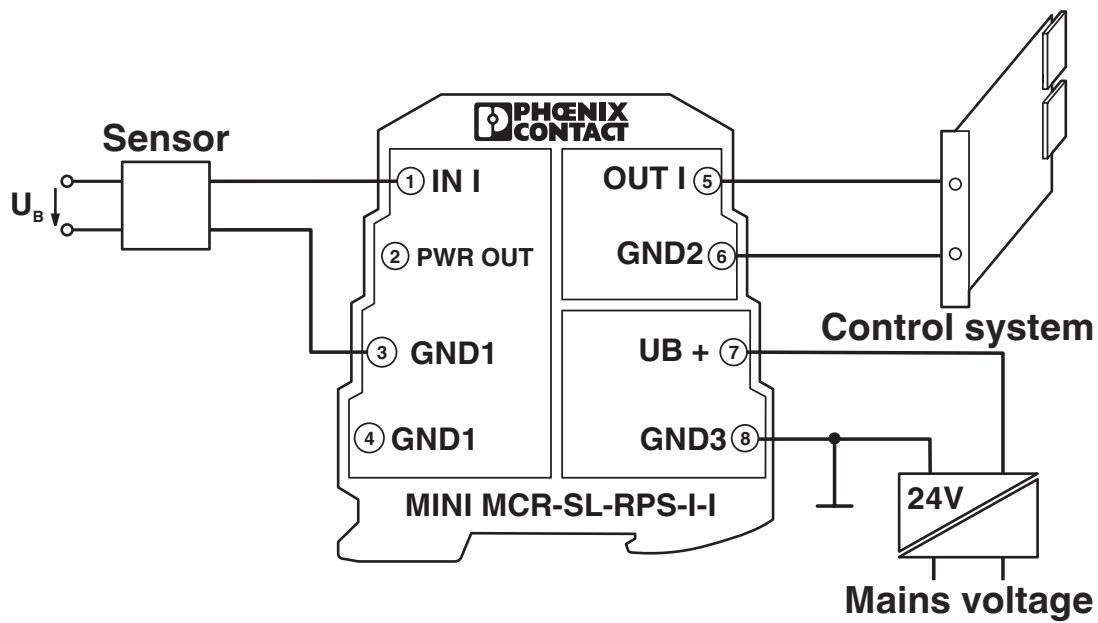


Isolator operation with an active sensor

Repeater power supply - MINI MCR-SL-RPS-I-I-SP

2864752

<https://www.phoenixcontact.com/us/products/2864752>

Application drawing

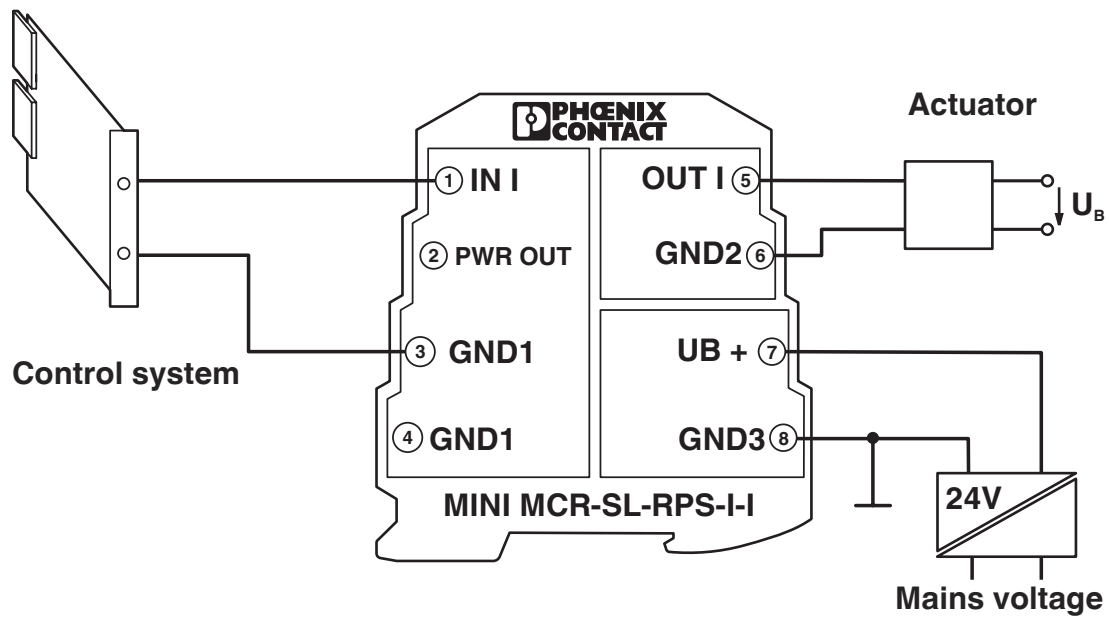


Isolator operation at the analog output module

Repeater power supply - MINI MCR-SL-RPS-I-I-SP

2864752

<https://www.phoenixcontact.com/us/products/2864752>

Block diagram

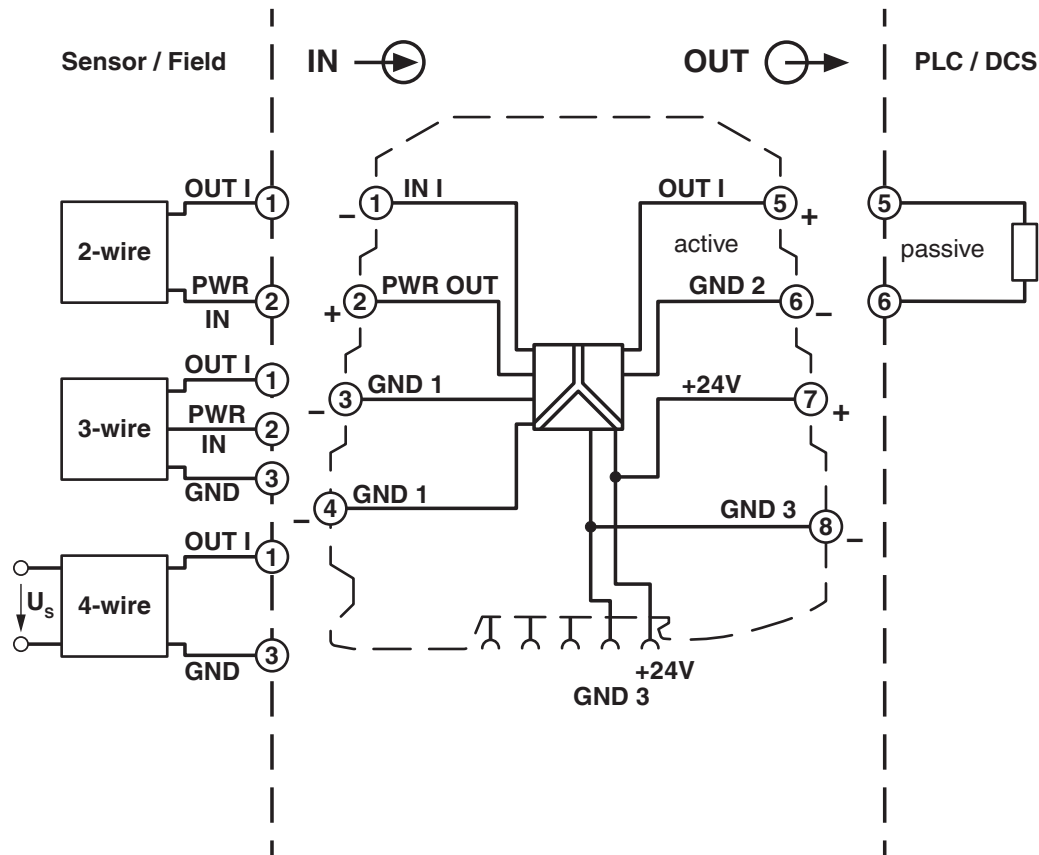


Repeater power supply - MINI MCR-SL-RPS-I-I-SP

2864752

<https://www.phoenixcontact.com/us/products/2864752>

Application drawing

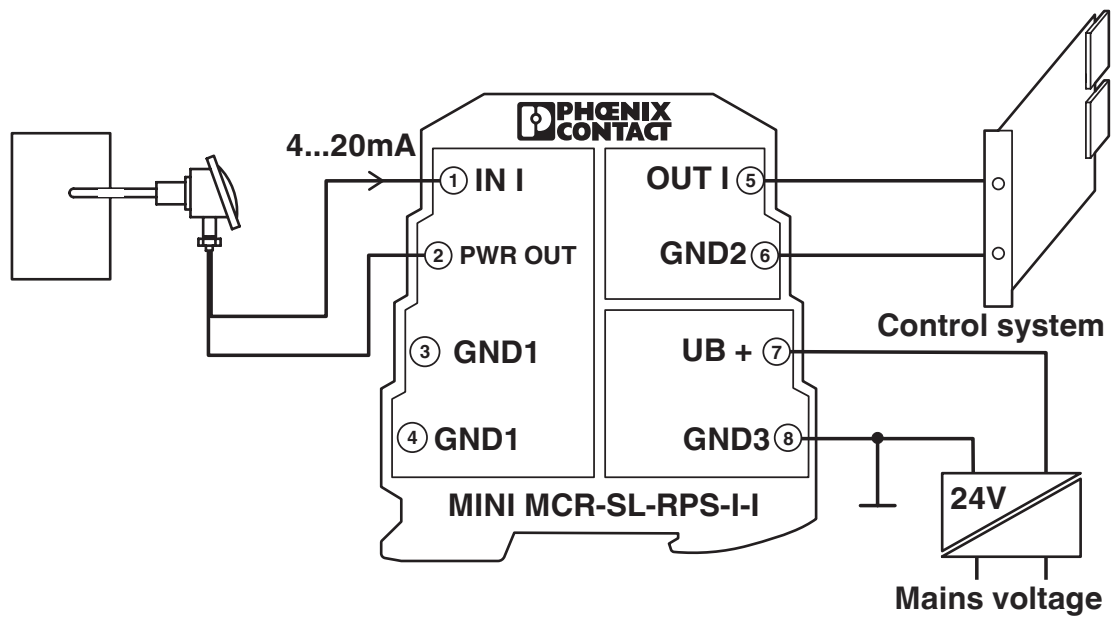


Repeater power supply operation with a passive sensor

Repeater power supply - MINI MCR-SL-RPS-I-I-SP

2864752

<https://www.phoenixcontact.com/us/products/2864752>

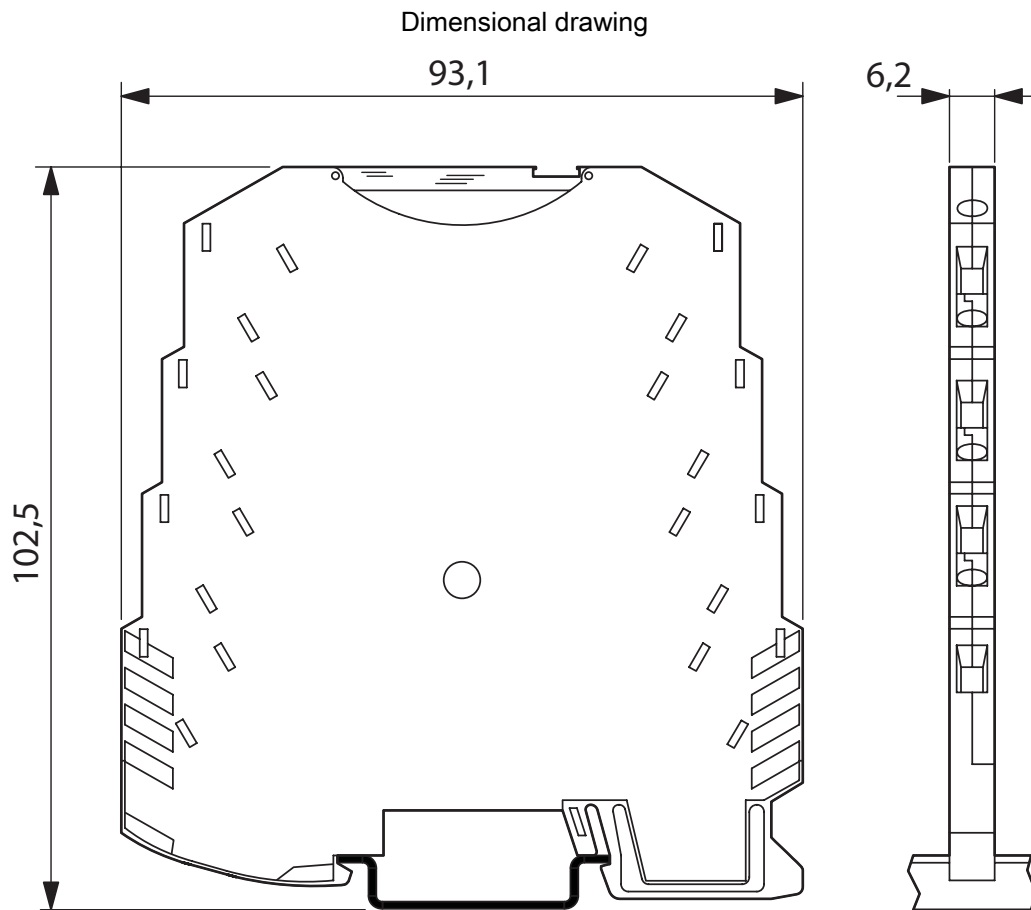

Repeater power supply - MINI MCR-SL-RPS-I-I-SP



2864752

<https://www.phoenixcontact.com/us/products/2864752>

Classifications

ECLASS

ECLASS-9.0	27210120
ECLASS-10.0.1	27210120
ECLASS-11.0	27210120

ETIM

ETIM 7.0	EC002653
----------	----------

Repeater power supply - MINI MCR-SL-RPS-I-I-SP



2864752

<https://www.phoenixcontact.com/us/products/2864752>

Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Repeater power supply - MINI MCR-SL-RPS-I-I-SP



2864752

<https://www.phoenixcontact.com/us/products/2864752>


Accessories

DIN rail bus connectors

DIN rail bus connectors - ME 6,2 TBUS-2 1,5/5-ST-3,81 GN - 2869728

<https://www.phoenixcontact.com/us/products/2869728>

DIN rail connector for DIN rail mounting. Universal for TBUS housing. Gold-plated contacts, 5-pos.



Power terminal block

Power terminal block - MINI MCR-SL-PTB - 2864134

<https://www.phoenixcontact.com/us/products/2864134>

MCR power terminal block for supplying several MINI Analog modules via the DIN rail connector, with screw connection, maximum current consumption of up to 2 A



Repeater power supply - MINI MCR-SL-RPS-I-I-SP



2864752

<https://www.phoenixcontact.com/us/products/2864752>

Power supply unit

Power supply unit - MINI-SYS-PS-100-240AC/24DC/1.5 - 2866983

<https://www.phoenixcontact.com/us/products/2866983>



Please use the following item in new systems: 2904614

Primary-switched MINI POWER power supply for DIN rail mounting, input: 1-phase, output: 24 V DC/1.5 A

Transparent cover

Transparent cover - MINI MCR DKL - 2308111

<https://www.phoenixcontact.com/us/products/2308111>



Fold up transparent cover for MINI MCR modules with additional labeling option using insert strips and flat Zack marker strip 6.2 mm

Repeater power supply - MINI MCR-SL-RPS-I-I-SP



2864752

<https://www.phoenixcontact.com/us/products/2864752>

Marking label

Marking label - MINI MCR-DKL-LABEL - 2810272

<https://www.phoenixcontact.com/us/products/2810272>

Label for extended marking of MINI MCR modules in connection with the MINI MCR-DKL



Phoenix Contact 2022 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com