
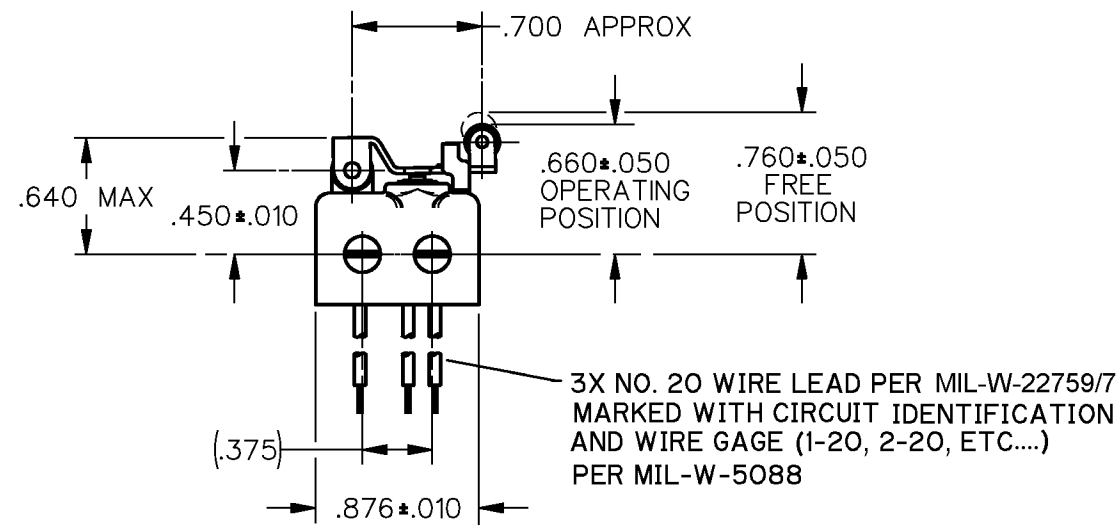
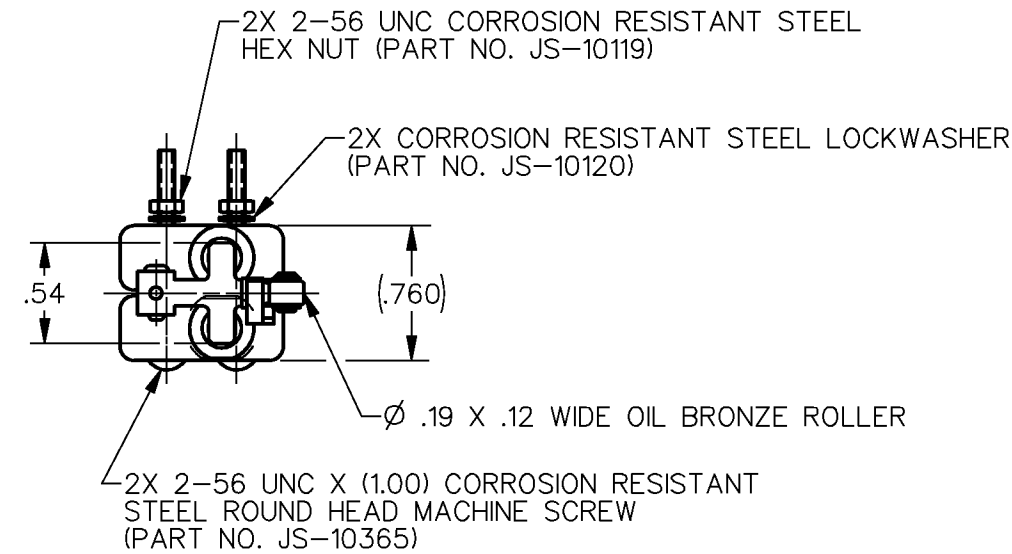



HONEYWELL  
PART NUMBER  
**8AS258-SE**  
FAA-PMA 

REV	DOCUMENT	CHANGED BY	CHECK
6	0006861	AS 02AUG04	AK



- NOTES
- 1 - SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY
  - 2 - UNIT INCLUDES (2) 1SE201 BASIC SWITCHES AND JE-22 ACTUATOR
  - 3 - PACKAGED TOGETHER UNASSEMBLED
  - 4 - FAA-PMA TO BE MARKED ON SWITCH
-  - FOR MANUFACTURING DETAIL SEE ASSEMBLY DRAWING 8AS258-SE FOR FAA-PMA


CHARACTERISTICS	ELECTRICAL DATA
OPERATING FORCE — — — 17 OZ MAX	CONTACT ARRANGEMENT S P D T
RELEASE FORCE — — — 4 OZ MIN	250 VAC ————— 5 AMP
DIFFERENTIAL TRAVEL — — — .012 MAX	30 VOLTS DC RATING
OVERTRAVEL — — — — .006 MIN	INDUCTIVE — SEA LEVEL ——— 3 AMP
	50,000 FT ——— 2.5 AMP
	RESISTIVE — SEA LEVEL ——— 5 AMP
	50,000 FT ——— 5 AMP
	MAXIMUM INRUSH ————— 24 AMP

DESIGN UNITS: INCH

TOLERANCES UNLESS NOTED:

NO PLACE	X	±	0.040
ONE PLACE	.X	±	0.030
TWO PLACE	.XX	±	0.015
THREE PLACE	.XXX	±	0.005
FOUR PLACE	.XXXX	±	0.0005
ANGLES		±	2

THIRD ANGLE PROJECTION



DRAWN	MAM	11DEC91
CHECK	TSM	12DEC91
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

<b>Honeywell</b>			
TITLE <b>SWITCH-ASSEMBLY</b>			
SIZE	TYPE	DRAWING NAME	REV
<b>B</b>	<b>I</b>	<b>8AS258-SE</b>	<b>6</b>
SCALE	FULL	SHEET	1 OF 1

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[8AS258-SE](#)