

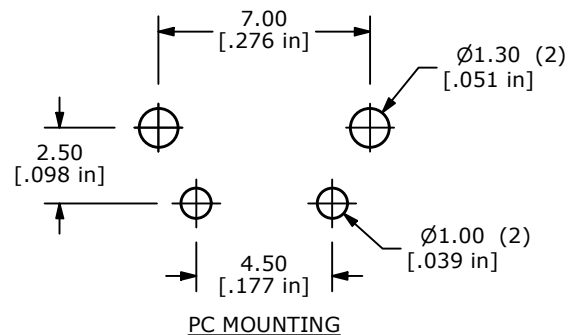

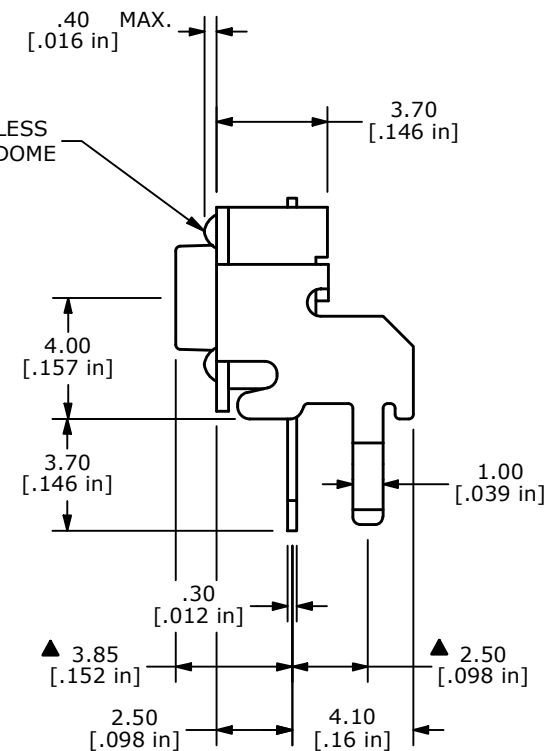


NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERM. NUMBERS FOR REFERENCE ONLY.
- ▲ 4. CONTACT MATERIAL: SILVER W/ STAINLESS STEEL DOME
5. RATING: 12VDC, 50mA
- ▲ 6. OPERATING FORCE: 250 ± 50 gf
7. TRAVEL: 0.25 +0.2/-0.1 mm
8. CONTACT RESISTANCE: 100 MILLI OHMS MAX. (INITIAL)
9. MECHANICAL/ELECTRICAL LIFE 100,000 CYCLES MIN.
10. ▲ DENOTES CRITICAL PARAMETER
11. PACKAGING: 1,000 PIECES PER REEL
12. OPERATING TEMP: -40°C TO 85°C

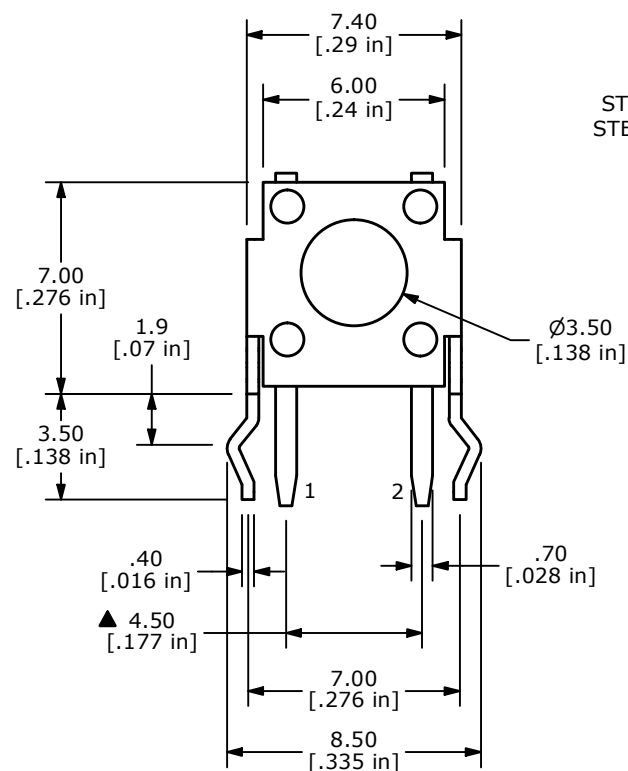

▲
ACTUATOR
COLOR: ORANGE

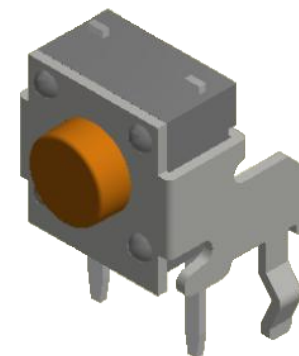

D	24548	REMOVE STEP IN HOUSING, CHANGE TEMP	10/19/20	JM
C	23373	correct Note 6 to 250	5/17/18	MW
B	18853	REVISE LIFE EXPECTANCY (WAS 100,000)	2/5/10	BLR
A	18701	RELEASED FOR PRODUCTION	11/6/09	BLR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



TITLE TL1105VF250QSSDOME

SCALE
4:1

DATE
2/5/2010

DR
BLR

DWG
P010251

REV
D