




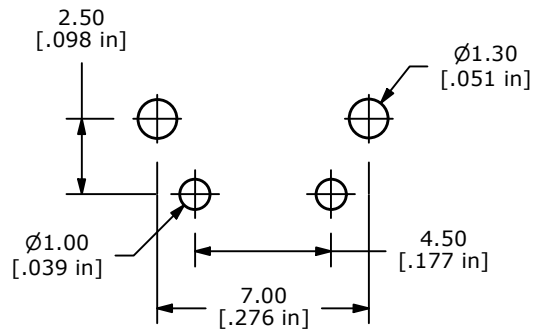




P.C.B. LAYOUT



CIRCUIT: SPST

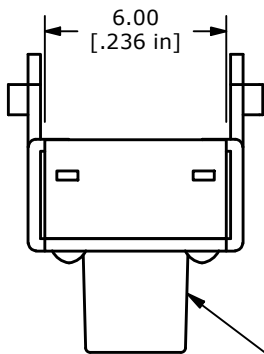

▲
ACTUATOR
COLOR: BLUE

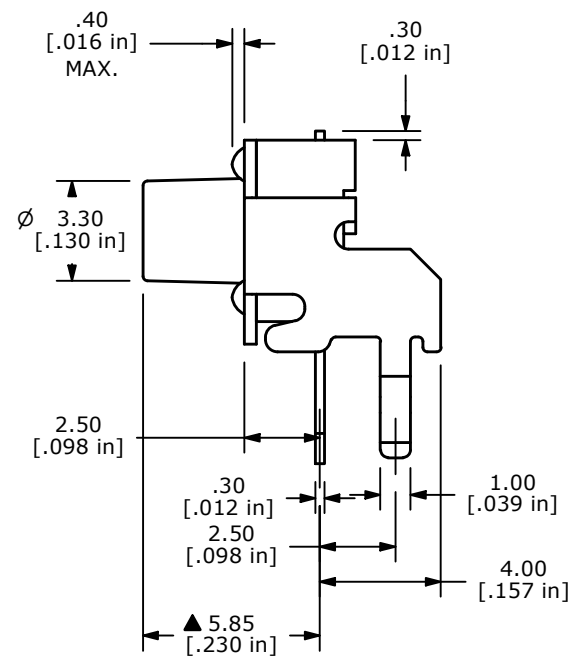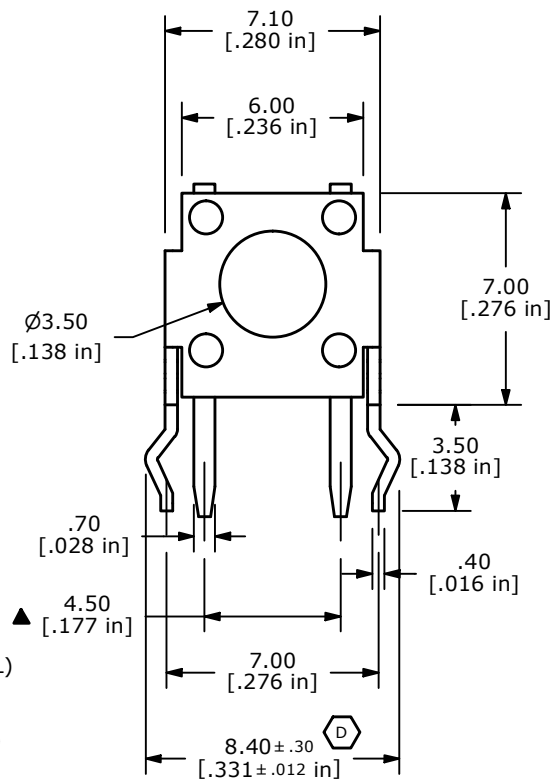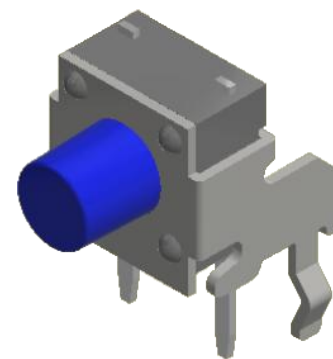

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: $X.X \pm 0.4$
 $X.XX \pm 0.25$
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 50VDC, 50mA
- ▲ 5. OPERATING FORCE: 160 ± 50 gf
6. TRAVEL: 0.3 ± 0.15 mm
7. CONTACT RESISTANCE: 100 MILLI OHMS MAX. (INITIAL)
8. MECHANICAL/ELECTRICAL LIFE 100,000 CYCLES MIN.
- ▲ 9. CONTACT MATERIAL: SILVER
- ▲ 10. HOUSING & ACTUATOR: TO MEET UL-94V0 STANDARD
11. ▲ DENOTES CRITICAL PARAMETER
12. OPERATING TEMP: -40°C TO 85°C

E	24550	REMOVE STEP IN HOUSING, CHANGE TEMP	10/19/20	JM
D	18677	LEG TOLERANCE WAS +/- 0.1	10/9/9	CJB
C	11855	ADD TEMPERATURE NOTE	11/28/01	CJB
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



E SWITCH®

TITLE	TL1105XF160Q94V0
-------	------------------

SCALE
4:1

DATE 2/19/2001

DR
CJB

DWG	P020230
-----	---------

REV
E