
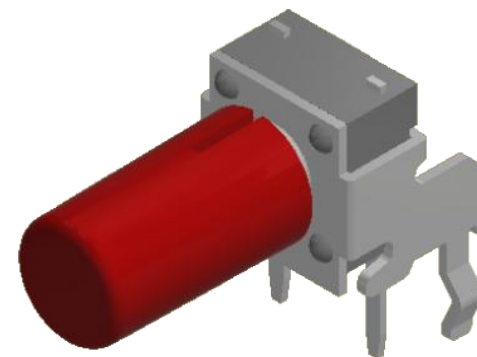
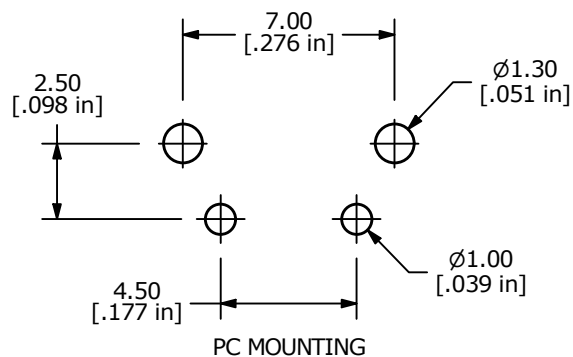
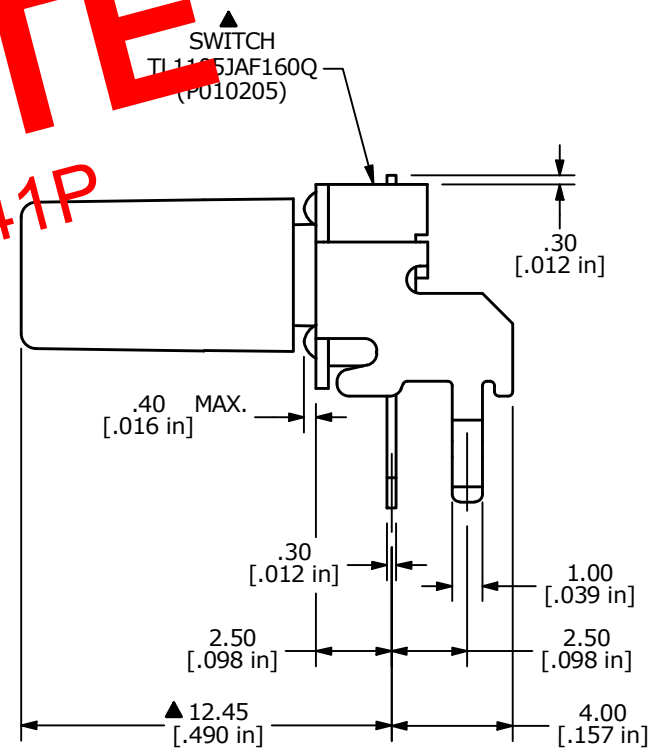


NOTES:

1. ALL DIMENSIONS IN MM [INCH].
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 50mA @ 50VDC
- ▲ 5. OPERATING FORCE: 160±50 gf
6. TRAVEL: 0.25+0.20/-0.10 mm
7. CONTACT RESISTANCE: 100 MILLI-OHMS MAX. (INITIAL)
8. MECHANICAL/ELECTRICAL LIFE: 100,000 CYCLES MIN.
- ▲ 9. CONTACT MATERIAL: SILVER
10. ▲ DENOTES CRITICAL PARAMETER.
11. OPERATING TEMP: -40°C TO 85°C

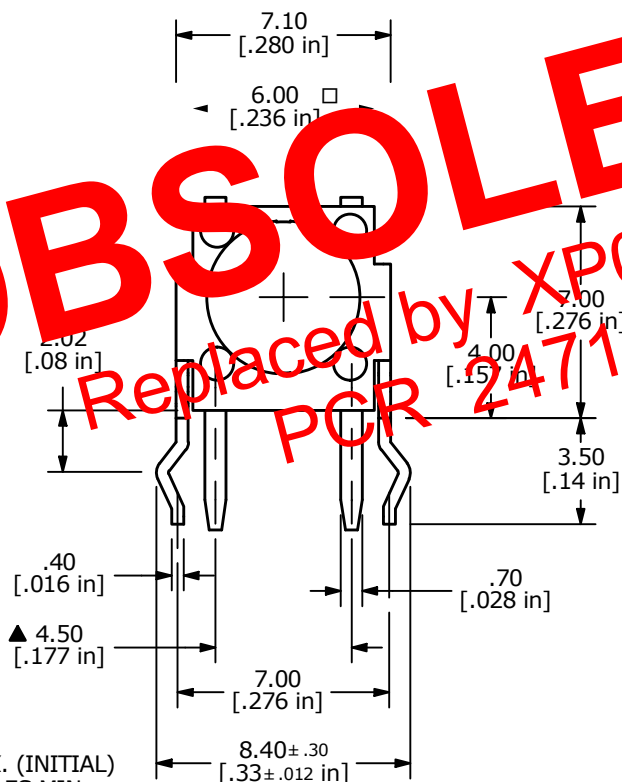

OBSOLETE

Replaced by XP0241P

PCR 24715

C	24553	REMOVE STEP IN HOUSING, CHANGE TEMP	10/30/20	JM	 E-SWITCH®				
B	18928	CHANGED CAP NUMBER / BOM	3/8/10	BLR					
A	11253	RELEASED FOR PRODUCTION	8/21/02	CJB	TITLE TL1105JAF160Q1RRED				
REV	PCR NO	DESCRIPTION	DATE	BY	SCALE	DATE	DR	DWG	REV
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					4:1	3/8/2010	BLR	XP0241A	C