



CMOS/ 2.5V to 3.3V/ 2.5×2.0mm



RoHS Compliant

Features

- Miniature ceramic package
2.5 (L) × 2.0 (W) × 0.7 (H) mm (Typ.)
- Highly reliable with seam welding
- CMOS output
- Supply voltage 2.5/ 3.3V
Wide operating voltage range 2.25 to 3.63V
- Low current consumption
- High output frequency 160MHz

Table 1

Freq. Code	Tol. $\times 10^{-6}$	Operating Temperature Range (°C)	Note
0	± 50	-10 to +70	Standard specifications
S	± 30		
U	± 25		
F	± 100	-40 to +85	Please contact us for available frequencies.
G	± 50		
6	± 50	-40 to +105	

How to Order

KC2520B 125.000 C 2 □ E 00
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series
- ② Output Frequency
- ③ Output Type (CMOS)
- ④ Supply Voltage (2.5V, 3.3V Compatible)
- ⑤ Frequency Tolerance (See Table 1)
- ⑥ Symmetry/ INH Function (45/ 55%)
- ⑦ Individual Specification (STD Specification is "00")

Packaging (Tape & Reel 2000 pcs./ reel)

Specifications


Item	Symbol	Conditions		Specifications		Unit
				Min.	Max.	
Output Frequency Range	fo	fo>125MHz		125	160	MHz
Frequency Tolerance	f_tol	Over all conditions : initial tolerance, operating temperature range, rated power supply voltage change, load change, aging (1year @25°C), shock and vibration	Temp. : -40 ~ +85°C	-100	+100	×10 ⁻⁶
			Temp.: -10 to +70°C/ -40 to +85°C/ -40 to +105°C	-50	+50	
			Temp. : -10 ~ +70°C	-30	+30	
Storage Temperature Range	T_stg			-55	+125	°C
Operating Temperature Range	T_use	Standard Specifications		-10	+70	°C
		Extend (Option)		-40	+85	
				-40	+105	
Max. Supply Voltage	—			-0.3	+4.0	V
Supply Voltage	Vcc			+2.25	+3.63	V
Current Consumption (Maximum Loaded/ 2.25≤Vcc≤2.75V)	Icc	125<fo≤160MHz		—	25	mA
Current Consumption (Maximum Loaded/ 2.75≤Vcc≤3.63V)		125<fo≤160MHz		—	27	
Stand-by Current	I_std			—	10	μA
Symmetry	SYM	@50% Vcc		45	55	%
Rise/ Fall Time (10% Vcc to 90% Vcc Maximum Loaded)	Tr/ Tf	125<fo≤160MHz		—	2.5	ns
Low Level Output Voltage	VOL	IOL=4mA		—	10% Vcc	V
High Level Output Voltage	VOH	IOH= -4mA		90% Vcc	—	
Output Load	L_CMOS	CMOS Output		—	15	pF
Low Level Input Voltage	VIL			—	30% Vcc	V
High Level Input Voltage	VIH			70% Vcc	—	
Disable Time	t_dis			—	100	ns
Enable Time	t_ena			—	5	ms
Start-up Time	t_str	@Minimum operating voltage to be 0 sec.		—	10	ms
1 Sigma Jitter	Jsigma	Measured with Wavcrest SIA-3000		—	3	ps
Peak to Peak Jitter	JPK-PK	125<fo≤160MHz		—	25	

Note: All electrical characteristics are defined at the maximum load and operating temperature range.

Please contact us for inquiry about operating temperature range, available frequencies and other conditions.

Dimensions

(Unit: mm)

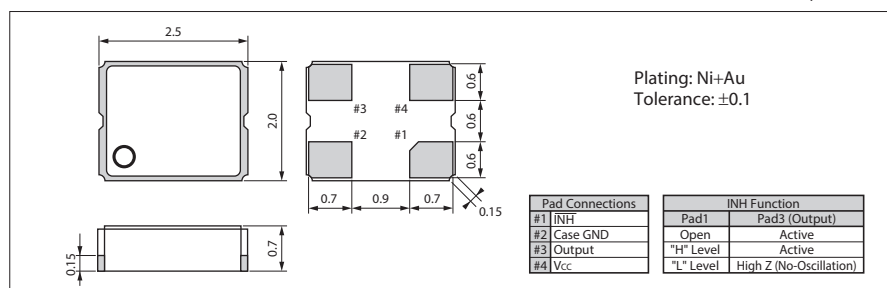

Recommended Land Pattern

(Unit: mm)

